



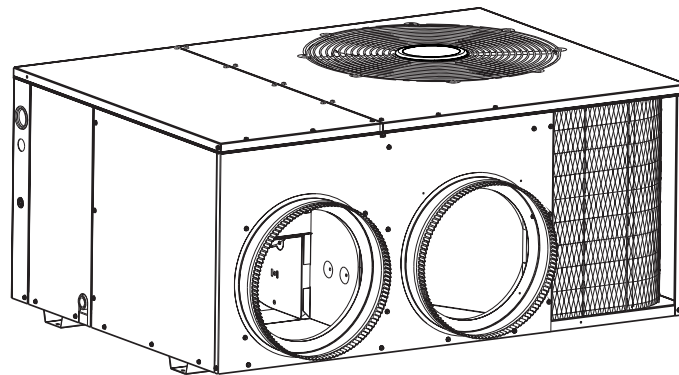

MAYTAG

TECHNICAL SPECIFICATIONS

Model PPA1RD Series

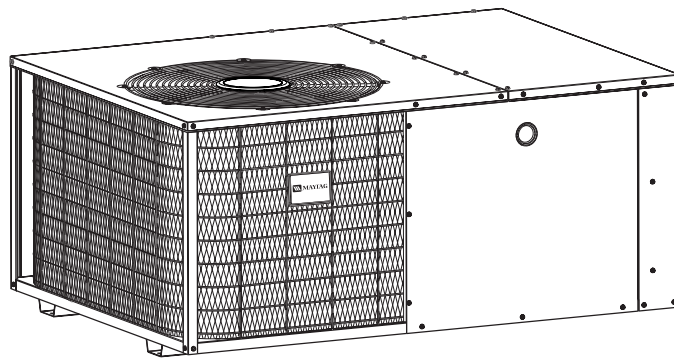

M1200 Product Line

**Single Packaged Air Conditioner
13 SEER - 2 Ton thru 5 Ton Units**

- **M1200 – 12 YEAR ALL PARTS LIMITED WARRANTY**
- **M1200 WITH UPGRADED WARRANTY PACKAGE - 12 YEAR ALL PARTS & LABOR LIMITED WARRANTY**
- Both the standard and upgraded limited warranty packages offer a 12 Year Dependability Promise to replace the entire unit, if the unit's major component (heat exchanger or compressor) fails within the first 12 years of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil to qualify.
- Product registration (by consumer or dealer) required for 12-year Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.
- Dealer is responsible for registration of labor portion of warranty.




The PPA1RD Series single packaged air conditioners are high efficiency self contained cooling and heating units that can be installed on a slab. Units are ETL and ETLc listed.

Features and Benefits

- **State-of-the-art "Copeland Scroll" compressor** is standard equipment.
- **Compressor sound blanket** standard.
- **Galvanized Steel Cabinet** Unit is trimmed in a silicone-protected polyester finish with a 950 hour salt spray finish that resists corrosion 50% better than comparable units.
- **Both coils** are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **The service valves are easily accessible** and simplify servicing of the refrigeration system.
- **A wire coil guard and mesh hail guard that will never rust** protects the coil from being damaged by balls, lawnmowers, hail, etc.
- **Designed to make servicing easier** for the contractor, access panels are provided to all major components.
- **0" clearance** to combustibles on duct side of the unit allows for installations in tight areas.
- **Low Pressure Control** Loss of charge protection ensures long compressor life.
- **Easy access** to evaporator for cleaning and general maintenance.
- **Drain trap** design optimizes drainage capabilities.
- **Easy to install** electric heat strip provides up to 20 kw of heat output.
- **Compact footprint and profile** make the PPA1RD Series easy to install and transport.


DIMENSIONS

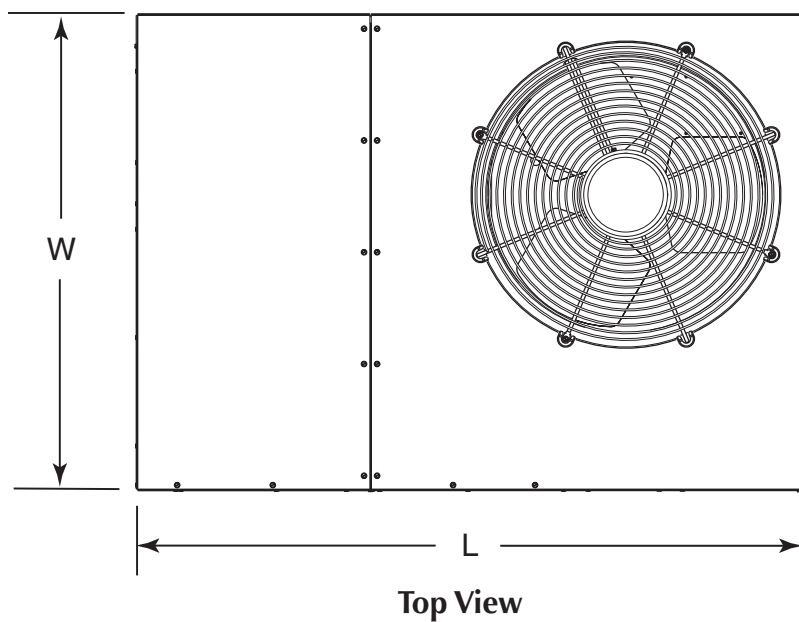


Model No. PPA1RD-	(L) Length	(W) Width	(H) Height	A	B
024K	49	35	30.2	35.02	2.48
030K	49	35	30.2	35.02	2.48
036K	49	35	30.2	35.02	2.48
042K	49	35	30.2	35.02	2.48
048K	49	35	30.2	35.02	2.48
060K	49	35	34.2	35.02	2.48

Model Number PPA1RD-	Return Diameter (in)	Supply Diameter (in)
024K	14	12
030K	14	12
036K	14	12
042K	14	12
060K	14	12

DIMENSIONS continued

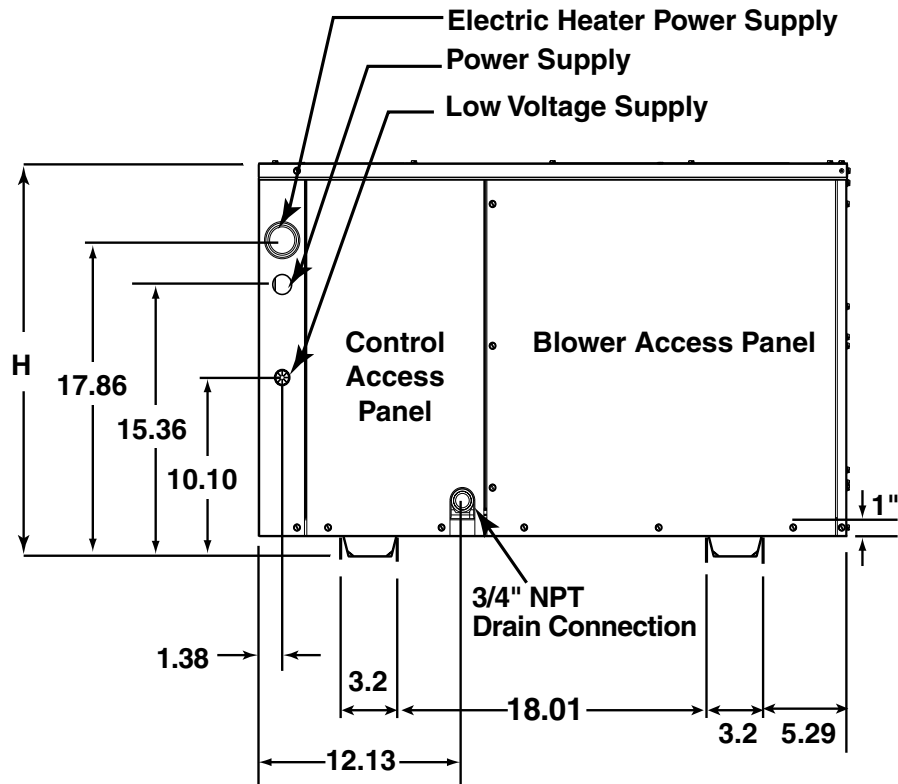

Side View

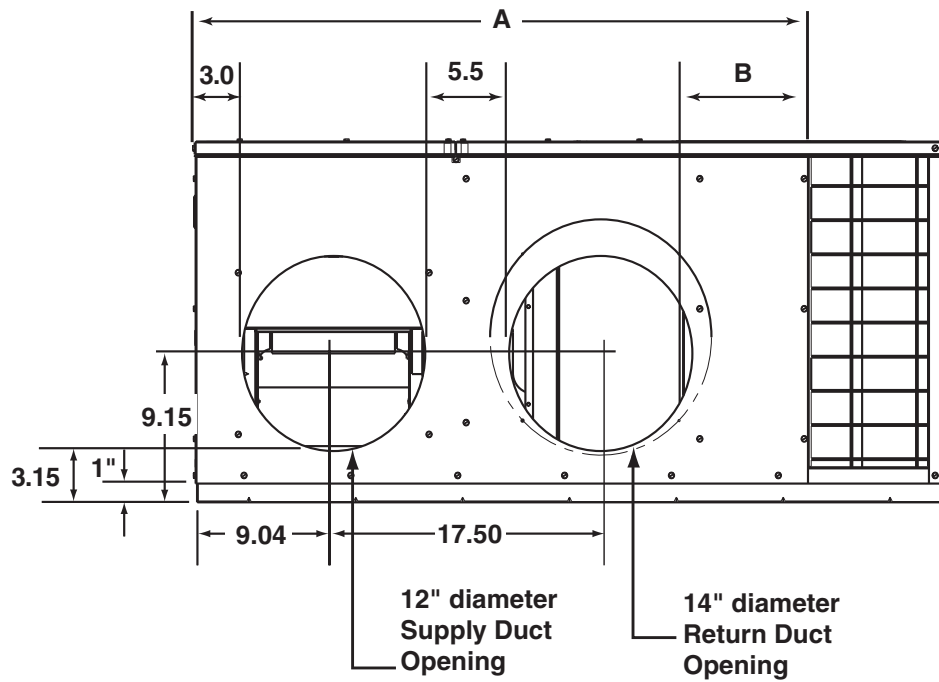

Back (Duct) View

ELECTRICAL DATA


Model Number	Heater Installed Nom. KW	Single Supply Circuit Option										Multiple Supply Circuit Option									
		Minimum Circuit Amp.					Maximum Over-current Rating*					Circuit A					Circuit B				
		Rec Wire (60°C Cu)					Rec Wire (75°C Cu)					Rec Wire (60°C Cu)					Rec Wire (75°C Cu)				
		Amp.	Gauge	Gauge	Gauge	Gauge	Amp.	Gauge	Gauge	Gauge	Gauge	Amp.	Gauge	Gauge	Gauge	Amp.	Gauge	Gauge	Gauge	Gauge	Rating
PPA1RD-024K	0	16.7	12	12	12	12	25	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	5	26.8	10	10	10	10	30	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	8	41.3	6	8	8	8	45	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	10	51.8	6	6	8	8	60	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PPA1RD-030K	0	21.9	10	10	10	10	35	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	5	26.8	10	10	10	10	35	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	8	41.3	6	8	8	8	45	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	10	51.8	6	6	8	8	60	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	15	76.8	3	4	4	4	80	50	6	8	8	26.8	10	10	10	30	-	-	-	-	-
PPA1RD-036K	0	22.2	10	10	10	10	35	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	5	26.8	10	10	10	10	35	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	8	41.3	6	8	8	8	45	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	10	51.8	6	6	8	8	60	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	15	76.8	3	4	4	4	80	50	6	8	8	26.8	10	10	10	30	-	-	-	-	-
PPA1RD-042K	0	32.2	8	8	8	8	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	5	32.2	8	8	8	8	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	8	44.7	6	8	8	8	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	10	55.1	4	6	6	6	60	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	15	80.1	3	4	4	4	90	50	6	8	8	30.1	8	8	8	35	-	-	-	-	-
	20	105.1	1	2	3	3	110	50	6	8	8	55.1	4	6	6	60	-	-	-	-	-
PPA1RD-048K	0	35.3	8	8	8	8	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	5	35.3	8	8	8	8	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	8	47.1	6	8	8	8	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	10	57.5	4	6	6	6	60	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	15	82.5	3	4	4	4	90	50	6	8	8	32.5	8	8	8	35	-	-	-	-	-
	20	107.5	1	2	3	3	110	50	6	8	8	57.5	4	6	6	60	-	-	-	-	-
PPA1RD-060K	0	42.45	6	8	8	8	70	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	5	42.45	6	8	8	8	70	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	8	47.08	6	8	8	8	70	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	10	57.5	4	6	6	6	70	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	15	82.5	3	4	4	4	90	50	6	8	8	32.5	8	8	8	35	-	-	-	-	-
	20	107.5	1	2	3	3	110	50	6	8	8	57.5	4	6	6	60	-	-	-	-	-

*When overcurrent rating exceeds 60, internal circuit breakers must be installed in addition to branch circuit protection at distribution panel.

HEATER KIT ACCESSORIES

Description	Part Number
4-Pole single circuit adaptor	913350
6-Pole single circuit adaptor	913556
Circuit Breaker Single Phase (2-pole)	913554

IDENTIFICATION CODE

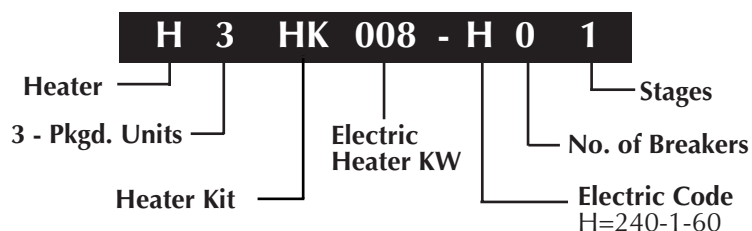


HEATER APPLICATION MATRIX

Model Number PPA1RD-	H3HK- 005H-01A 917166A	H3HK- 008H-01A 917167A	H3HK- 010H-01A 917168A	H3HK- 015H-01A 917169A	H3HK- 020H-01A 917170A	H3HK- 015H-21A 917172A	H3HK- 020H-21A 917173A
024K	X(0)	X(0)	X(0)	NA	NA	NA	NA
030K	X(0)	X(0)	X(0)	X(2)	NA	X(0)	NA
036K	X(0)	X(0)	X(0)	X(2)	NA	X(0)	NA
042K	X(0)	X(0)	X(0)	X(2)	X(2)	X(0)	X(1)
048K	X(0)	X(0)	X(0)	X(2)	X(2)	X(0)	X(1)
060K	X(0)	X(0)	X(0)	X(2)	X(2)	X(0)	X(1)

NA = Not Approved

() = Number of internal circuit breaker kits required.

IDENTIFICATION CODE

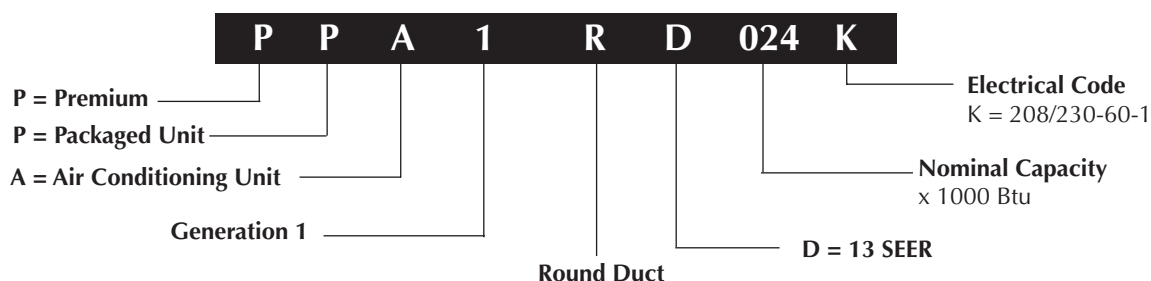

PHYSICAL SPECIFICATIONS

Model No. PPA1RD	024K	030K	036K	042K	048K	060K
Electric Rating - 60Hz (a)						
Operating Voltage Range	187 - 253	187 - 253	187 - 253	187 - 253	187 - 253	187 - 253
Min. Circuit Ampacity (a)	16.7	21.9	22.2	32.2	35.3	42.5
Field Wire Size - AWG (a)	12	10	10	8	8	8
Delay Fuse - Max. (b)	25	35	35	50	50	70
Total Unit - Amps	13.8	17.9	18.2	26.8	29.7	35.4
Compressor Data						
Volts	208 - 230	208 - 230	208 - 230	208 - 230	208 - 230	208 - 230
Rated Load Amps	11.6	15.7	15.7	21.5	22.5	28.2
Lock Rotor Amps	54.0	68.0	68.0	104.0	137.0	141.0
Fan Motor and Condenser						
Fan Motor - HP - RPM	1/8 - 1100	1/8 - 1100	1/8 - 1100	1/8 - 1100	1/4 - 1100	1/4 - 1100
Fan Motor - Amps	.84	.84	.84	1.2	1.2	1.2
Fan Diameter / CFM	20" - 2800	20" - 2800	20" - 2800	20" - 3000	20" - 3000	20" - 3000
Motor and Evaporator						
Blower Motor - HP - RPM	1/4 - 980	1/4 - 980	1/4 - 980	1/2 - 1000	3/4 - 1060	3/4 - 1060
Blower Motor - Amps	1.4	1.4	1.4	4.1	6	6
CFM @ E.S.P. - in. W.C.	770 @ .30	1020 @ .30	1000 @ .30	1300 @ .30	1500 @ .30	1500 @ .30
Refrigerant Charge - Oz.	136	123	136	128	146	147
Shipping weight - lbs.	290	295	295	312	318	348

- (a) Amperage and wire size based on refrigeration system only. See Electrical Data tables for supplemental electric heaters.
 Refer to National Electric Code for additional derating factors for field installed conductors.
- (b) Use time delay fuse or "HACR" type circuit breaker.

SYSTEM COOLING CAPACITIES

Model Number P3RD-	Cooling Btuh	SEER	EER
024K	24,000	13	12.4
030K	30,000	13	12.1
036K	35,400	13	11.8
042K	40,500	13	11.5
048K	47,500	13	11.3
060K	55,500	13	11.0

BLOWER PERFORMANCE

Model Number PPA1RD-		External Static Pressure (in. WC)					
		0.1	0.2	0.3	0.4	0.5	0.6
024K †	High	1120	1060	1000	930	860	750
	Low	840	800	760	710	610	N/A
030K †	High	1450	1380	1320	1240	1150	1050
	Low	1070	1050	1030	980	930	N/A
036K †	High	1480	1440	1390	1330	1270	1190
	Low	1270	1230	1190	1140	1080	1000
042K * **	Tap T1	1100	900	750	650	580	520
	Tap T2	1170	1080	1000	620	900	860
	Tap T3	1220	1180	1140	1100	1070	1020
	Tap T4	1370	1333	1300	1260	1230	1180
	Tap T5	1410	1340	1450	1320	1280	1240
048K * **	Tap T1	1380	1360	1340	1300	1260	1240
	Tap T2	1530	1480	1450	1420	1390	1350
	Tap T3	1570	1540	1500	1475	1440	1405
	Tap T4	1740	1700	1650	1630	1600	1560
	Tap T5	2130	2080	1970	1890	1850	1800
060K * **	Tap T1	1380	1360	1340	1300	1260	1240
	Tap T2	1530	1480	1450	1420	1390	1350
	Tap T3	1570	1540	1500	1475	1440	1405
	Tap T4	1740	1700	1650	1630	1600	1560
	Tap T5	2130	2080	1970	1890	1850	1800

* Factory set cooling speed

** Factory set electric heating speed

† Factory set cooling and electric heating speed

COPPER WIRE SIZE — AWG (1% Voltage Drop)

Supply Wire Length-Feet				Supply Circuit Ampacity
200	150	100	50	
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.



CERTIFICATION APPLIES
ONLY WHEN THE
COMPLETE SYSTEM
IS LISTED WITH ARI



Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ©Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2007. All rights reserved.

012C-0607 (Replaces 012C-0207)

Printed in U.S.A. (06/07)