


MAYTAG

TECHNICAL SPECIFICATIONS

Model PSH2BD Series

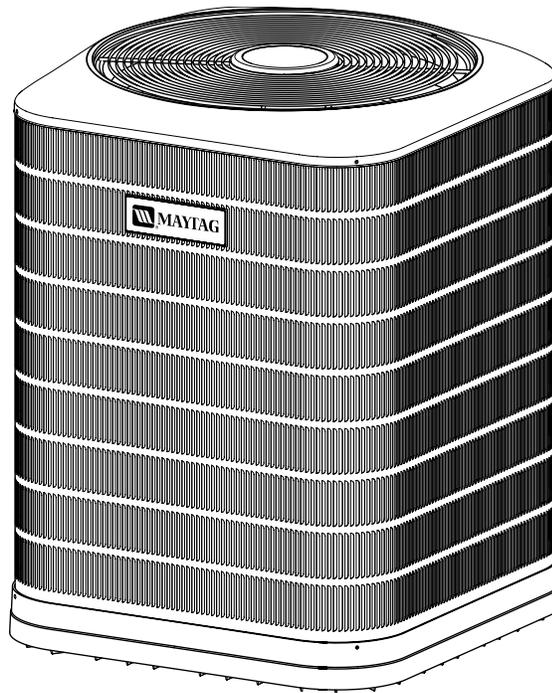

M1200 Product Line

**High Efficiency Heat Pumps
13+ SEER — 1.5 - 5 Ton Capacity**

- **M1200 – 12 YEAR ALL PARTS LIMITED WARRANTY**
- **M1200 WITH UPGRADED WARRANTY PACKAGE - 12 YEAR ALL PARTS & LABOR LIMITED WARRANTY**
- **Both the standard and upgraded limited warranty packages offer a 12 Year Dependability Promise to replace the entire unit, if the unit's major component (heat exchanger or compressor) fails within the first 12 years of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil to qualify.**
- **Product registration (by consumer or dealer) required for 12-year Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.**
- **Dealer is responsible for registration of labor portion of warranty.**




The PSH2BD Series of heat pumps offers exceptional performance. The heat pump, when combined with our engineered coils or air handlers, offers a full line of quality, split system heating and cooling equipment. The PSH2BD is rated at 13 SEER and 8.0 HSPF when matched with our air handler or furnace. When matched with our variable speed air handler, or our variable speed blower kits, the PSH2BD is rated up to 14 SEER and 8.5 HSPF.

Features and Benefits


- **Designed using Stainless Steel** – Durable brushed stainless steel protects the coil from yard hazards and extreme weather. Unit is trimmed in a silicone-protected polyester finish with a 950 hour salt spray finish that resists corrosion 50% better than comparable units.
- **Quiet Plus™ Compressor Sound Blanket** – Engineered to significantly reduce unwanted noise.
- **Swept-Wing Fan Blade.**
- **Copper Tube / Aluminum Fin Coils** – Coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Full Service Valves** – These brass valves are easily accessible and simplify servicing of the refrigeration system.
- **Time / Temperature Defrost** – A reliable, industry standard control offers various time settings to meet any type climate.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **Low Pressure Control** – Loss of charge protection ensures long compressor life.
- **Liquid Line Filter / Drier** – Included with unit, field installed.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Common Suction Service Port** – This port allows the contractor to read the suction pressure in all modes of operation without removing any panels, saving time and increasing serviceability.
- **Five Minute Restart Time Delay** – When the unit shuts down, a five minute delay keeps the unit from restarting, eliminating the highest cause for compressor failure.
- **Suction Accumulator and Crankcase Heat** – Protection from liquid flood back and future compressor failures. All 13 seer H.P. have scroll compressors.
- **Hot Gas Muffler** – Reduces compressor noise and vibration.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **ComfortAlert™ Module** – Detects system and electrical problem conditions. A diagnostics key directs the service technician to the root cause of a problem.

DIMENSIONS/OUTDOOR SECTION

PSH2BD	018K	024K	030K	036K	042K	048K	060K
H	36-1/4	29	41	45	41	45	45
W	23-1/4	31-1/4	31-1/4	31-1/4	31-1/4	31-1/4	31-1/4
D	23-1/4	31-1/4	31-1/4	31-1/4	31-1/4	31-1/4	31-1/4

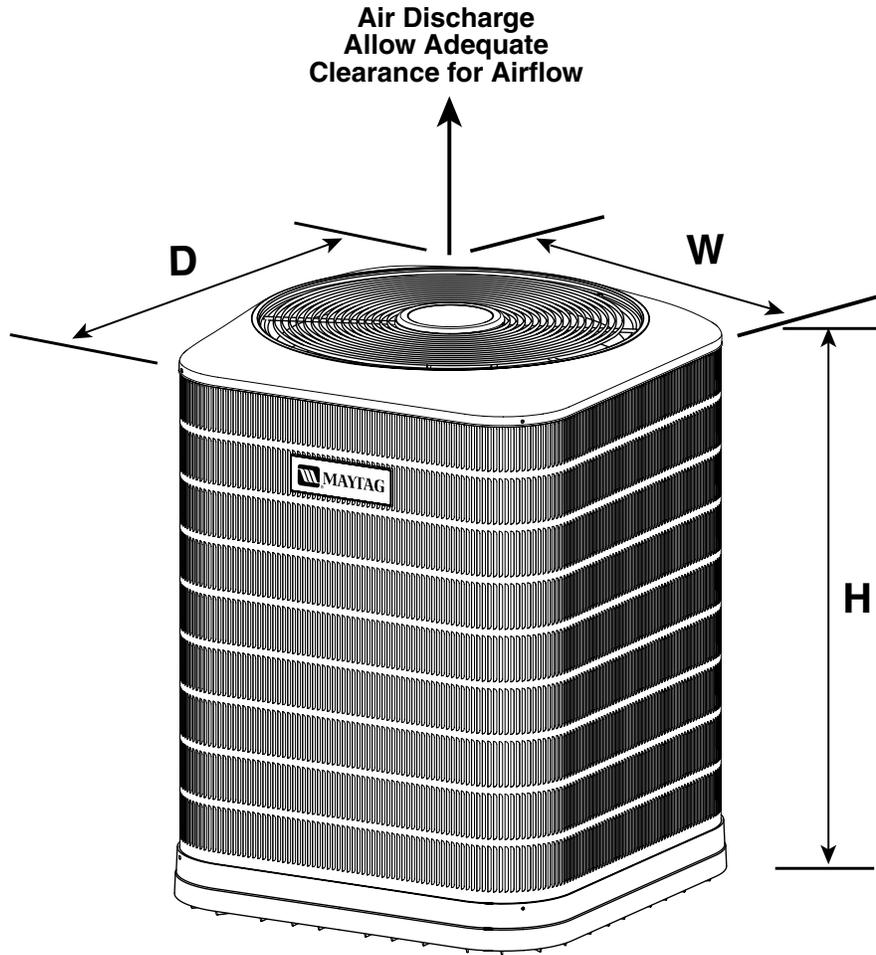

IDENTIFICATION CODE

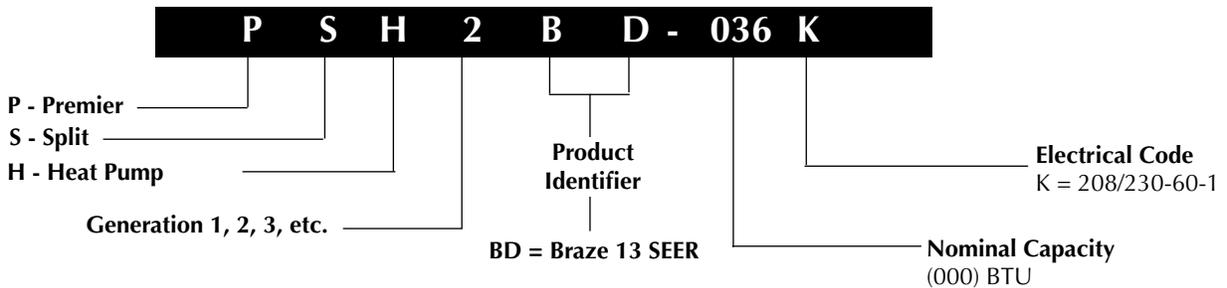

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

13/14 SEER — High Efficiency — Single Phase

Model Number PSH2BD-		018K	024K	030K	036K	042K	048K	060K	
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	
	Total Amps	9.9	11.8	13.2	15.7	17.5	19.7	26.4	
	Delay Fuse Max. (2)	20	25	25	30	35	40	50	
	Min. Circuit Ampacity	12.1	14.5	16.2	19.4	21.6	24.3	32.6	
Component Data	Coil	Area	15.17	15.17	22.88	25.42	22.88	25.42	25.42
		Rows-FPI	1 - 18	1 - 18	1 - 20	1 - 20	2 - 16	2 - 16	2 - 16
		Tube Dia	3/8" O.D.	3/8" O.D.					
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	0.91	0.91	1.00	1.00	1.00	1.4	1.4
		HP	1/8	1/8	1/4	1/4	1/4	1/4	1/4
	Fan Blade	Dia-# Blades	24" - 3	24" - 3	24" - 3	24" - 3	24" - 3	24" - 3	24" - 3
		SCFM	2370	2370	3000	3000	3000	4000	4000
	Compressor Data	RLA	10	12	14	16.4	18.4	20.4	28
		LRA	41	54	67	83	95	109	148
Refrigerant suction line- Length/O.D. (Liq. Line All Lengths - 3/8" O.D.)	0-24 ft.	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	
	25-39 ft.	3/4"	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (4)	
	40-75 ft.	3/4"	3/4"	7/8" (3)	7/8" (3)	7/8"	1-1/8" (4)	1-1/8" (4)	
Refrigerant charge in ounces (Outdoor unit, Indoor Unit 15' Line Set)		93	96	144	155	248	248	268	
Weight (Approximate lbs.)	Net	166	171	190	204	252	276	285	
	Ship	175	180	200	215	265	290	300	

(1) Operating Voltage Range: 198v min. — 253v max.

(2) HACR Type Circuit Breakers or Time Delay Fuse.

(3) 7/8" to 3/4" reducer required.

(4) 1 1/8" to 7/8" reducer required.

ACCESSORIES - CONDENSING UNIT

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Outdoor Thermostat - 913235

Two stage logic provides ability to lock out electric strips down to balance point and bring on in stages.

Liquid Line Solenoid Kit (LLS)

913869 - 4 - 5 ton

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit Ampacity
200	150	100	50	
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

SYSTEM HEATING & COOLING CAPACITIES

13+ SEER — High Efficiency

Outdoor Unit	Indoor TXV Coil + TDR	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47 F	HSPF	SCFM
018K	C6B(A,H)-T24(C,U)-A + MB6BM	18000	13.0	12.9	17500	8	600
018K	C6B(A,H)-T24(C,U)-B + MB6BM	18000	13.0	12.9	17500	8	600
024K	C6B(A,H)-T24(C,U)-A + MB6BM	24000	13.0	12.2	22400	8	770
024K	C6B(A,H)-T24(C,U)-B + MB6BM	24000	13.0	12.2	22400	8	770
030K	C6B(A,H)-T30(C,U)-A + MB6BM	28000	13.0	11.7	28000	8	800
030K	C6B(A,H)-T30(C,U)-B + MB6BM	28000	13.0	11.7	28000	8	800
036K	C6B(A,H)-T36(C,U)-B + MB6BM	35000	13.0	12	35600	8	1150
036K	C6B(A,H)-T36(C,U)-C + MB6BM	35000	13.0	12	35600	8	1150
042K	C6B(A,H)-T42(C,U)-B + MB6BM	40000	13.0	12	40000	8	1350
042K	C6B(A,H)-T42(C,U)-C + MB6BM	40000	13.0	12	40000	8	1350
048K	C6B(A,H)-T48(C,U)-C + MB6BM	47500	13.0	12	46000	8	1625
048K	C6B(A,H)-T48(C,U)-D + MB6BM	47500	13.0	12	46000	8	1625
060K	C6B(A,H)-T60(C,U)-C + MB6EM	57000	13.0	11.6	56500	8	1840
060K	C6B(A,H)-T60(C,U)-D + MB6EM	57000	13.0	11.6	56500	8	1840

Outdoor Unit	Indoor TXV Coil + TDR	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47 F	HSPF	SCFM
018K	C5B(A,H)-T24(U,C)-A	18,000	13.0	12.4	17,800	8.0	600
018K	C5B(A,H)-T25(U,C)-A	18,000	13.0	12.4	17,800	8.0	600
024K	C5B(A,H)-T25(U,C)-A	24,000	13.0	12.4	22,400	8.0	750
024K	C5B(A,H)-T25(U,C)-B	24,000	13.0	12.4	22,400	8.0	750
030K	C5B(A,H)-T30(U,C)-A	29,000	13.0	12.1	28,600	8.0	870
030K	C5B(A,H)-T30(U,C)-B	29,000	13.0	12.1	28,600	8.0	870
036K	C5B(A,H)-T36(U,C)-B	35,400	13.0	11.7	36,000	8.0	1,140
042K	C5B(A,H)-T42(U,C)-B	40,000	13.0	11.8	40,000	8.0	1,350
048K	C5B(A,H)-T49(U,C)-C	45,500	13.0	11.3	47,500	8.0	1,500
060K	C5B(A,H)-T60(U,C)-C+TDR+VSB-C	57,000	13.0	11.6	60,000	8.0	1,600

Outdoor Unit	Indoor TXV Air Handler PAH2BM-	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47 F	HSPF	SCFM
018K	T24K-A	18,000	13.0	12.4	17,800	8.0	600
018K	T25K-A	18,000	13.0	12.4	17,800	8.0	600
024K	T25K-A	24,000	13.0	12.4	22,400	8.0	750
024K	T25K-B	24,000	13.0	12.4	22,400	8.0	750
030K	T30K-A	29,000	13.0	12.1	28,600	8.0	870
030K	T30K-B	29,000	13.0	12.1	28,600	8.0	870
036K	T36K-B	35,400	13.0	11.7	36,000	8.0	1,140
042K	T42K-B	40,000	13.0	11.8	40,000	8.0	1,350
048K	T49K-C	45,500	13.0	11.3	47,500	8.0	1,500
060K	T60K-C	57,000	13.0	11.6	60,000	8.0	1,600

(1) Field Supplied Piston

LLS = Liquid Line Solenoid

TDR = Time Delay Relay included in Maytag furnace and air handler

VSB = Variable Speed Blower

See current ARI Directory for certified combinations and ratings.

Air handlers and coils used in tables are designed and manufactured by NORDYNE.

SYSTEM HEATING & COOLING CAPACITIES (Continued)

14+ SEER — High Efficiency

Outdoor Unit	Indoor TXV Coil	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47 F	HSPF	SCFM
018K	C5B(A,H)-T24(U,C)-B+TDR+VSB-B	18,100	14.0	12.2	16300	8.5	720
024K	C5B(A,H)-T25(U,C)-B+TDR+VSB-B	24,200	14.0	12.4	22000	8.5	800
030K	C5B(A,H)-T30(U,C)-B+TDR+VSB-B	29,400	14.0	12.5	25800	8.5	860
036K	C5B(A,H)-T36(U,C)-B+TDR+VSB-B	35,800	14.0	12.4	35800	8.5	1,125
042K	C5B(A,H)-T42(U,C)-B+TDR+VSB-B	40,500	14.0	12.3	41500	8.5	1,375
048K	C5B(A,H)-T49(U,C)-C+TDR+VSB-C	46,000	14.0	12.4	46500	8.5	1,555

Outdoor Unit	Indoor TXV Air Handler PAH2VM-	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47 F	HSPF	SCFM
018K	T24K-B	18,100	14.0	12.2	16300	8.5	720
024K	T25K-B	24,200	14.0	12.4	22000	8.5	800
030K	T30K-B	29,400	14.0	12.5	25800	8.5	860
036K	T36K-B	35,800	14.0	12.4	35800	8.5	1,125
042K	T42K-B	40,500	14.0	12.3	41500	8.5	1,375
048K	T49K-C	46,000	14.0	12.4	46500	8.5	1,555

Outdoor Unit	Indoor TXV Air Handler PAH2VM-	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47 F	HSPF	SCFM
018K	T24K-B+VSB-B	18,100	14.0	12.2	16300	8.5	720
024K	T25K-B+VSB-B	24,200	14.0	12.4	22000	8.5	800
030K	T30K-B+VSB-B	29,400	14.0	12.5	25800	8.5	860
036K	T36K-B+VSB-B	35,800	14.0	12.4	35800	8.5	1,125
042K	T42K-B+VSB-B	40,500	14.0	12.3	41500	8.5	1,375
048K	T49K-C+VSB-C	46,000	14.0	12.4	46500	8.5	1,555

LLS = Liquid Line Solenoid

TDR = Time Delay Relay included in Maytag furnace and air handler

VSB = Variable Speed Blower

See current ARI Directory for certified combinations and ratings.

Air handlers and coils used in tables are designed and manufactured by NORDYNE.

COMFORT ALERT™ DIAGNOSTIC MODULE

Green POWER LED Indicates Voltage Is Present At The Power Connection Of The Module

Pass Through Ports Detect Run/Start Current; Spade Connectors Detect Tstat Demand and Pilot Voltage; Microprocessor Monitors Behavior To Determine Faults

Yellow ALERT LED Flashes To Indicate Fault Code

Red TRIP LED Indicates If Compressor Is Tripped Or Has No Power

Diagnostics Key Directs Service Tech To The Root Cause Of A Problem



MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ©Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2008. All rights reserved.

044C-0708 (Replaces 044C-0608)
Printed in U.S.A. (07/08)