

TECHNICAL SPECIFICATIONS

JS6BF Series

2 - 4 Ton Capacity

JS4BF Series

5 Ton Capacity

The JS(4,6)BF Series now offers the choice of an air conditioner that uses a more efficient and environmentally friendly refrigerant designated R-410A. The VS(4,6)BF Series of air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a line of quality, 16 SEER split system cooling equipment.



WARRANTY

- This product offers a 10-year all-parts warranty.
- This product offers a 1 Year Quality Pledge to replace the unit if the compressor fails in the first year of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil.
- Consumer product registration required for 10 year All Parts Warranty and Quality Pledge within a limited period of time after the installation. See current warranty document or visit our consumer web site listed on the back of this document for warranty details.

FEATURES and BENEFITS

- **Composite Base Pan:** Absorbs sound and corrosion resistant. Composite is also stronger and lighter than steel.
- **R-410A Refrigerant:** Earth friendly non-ozone depleting refrigerant.
- **Durable, Attractive Cabinet:** Designed using galvanized steel with a polyester urethane finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.
- **Removable Top Grille Assembly:** Allows ease of service from the top without disconnecting fan motor leads.
- **High Pressure Switch:** Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter Drier:** Included with unit, field installed.
- **One Piece Top/Orifice:** Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access:** Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Complete Metal Wrapper:** Durable metal guard protects the coil from yard hazards and extreme weather.
- **Anteater MC Micro-Channel:** All aluminum coils in all models which provides high corrosion resistance.


JS6BF

- **Copeland Scroll Compressor:** Copeland's proven and simple design equates to years of comfort and reliability for the homeowner with virtually silent operation.

JS4BF

- **Copeland Scroll UltraTech™ Compressor:** The Ultra Tech Compressor operates with 2 stages of cooling capacity to provide superior comfort and efficiency. Copeland's proven and simple design equates to years of comfort and reliability for the homeowner with virtually silent operation.
- **Low Pressure Switch:** Loss of charge protection ensures long compressor life. Auto-reset feature prevents nuisance service visits.


MODEL IDENTIFICATION CODES

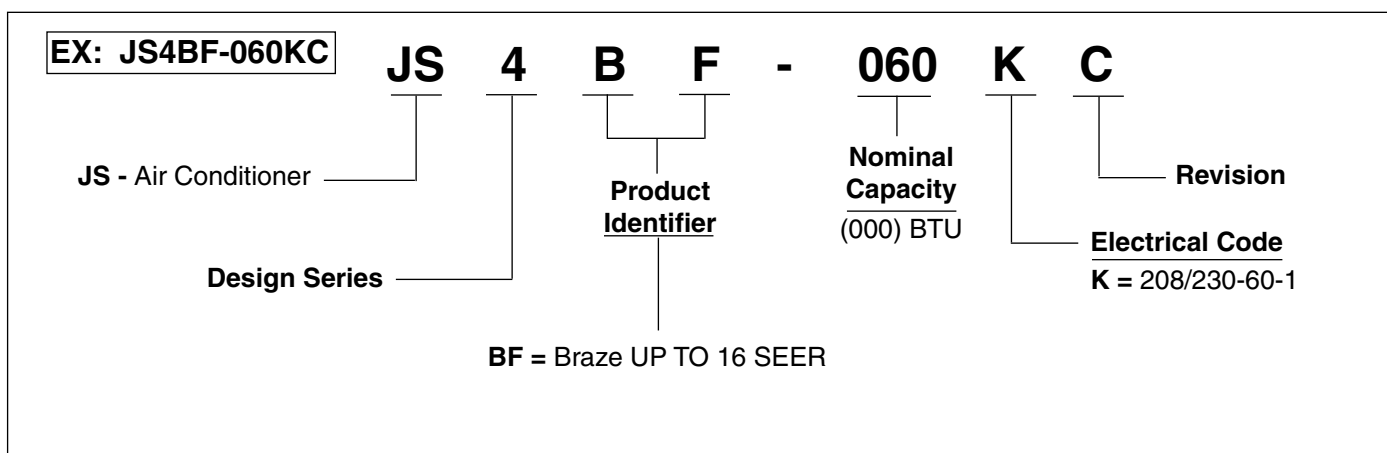

DIMENSIONS

AIR CONDITIONER OUTDOOR SECTION

	JS6BF-024K	JS6BF-030K	JS6BF-036K	JS6BF-042K	JS6BF-048K	JS4BF-060KC
H	35"	27"	39"	43"	43"	43"
W	22 3/4"	30 3/4"	30 3/4"	30 3/4"	30 3/4"	30 3/4"
D	22 3/4"	30 3/4"	30 3/4"	30 3/4"	30 3/4"	30 3/4"

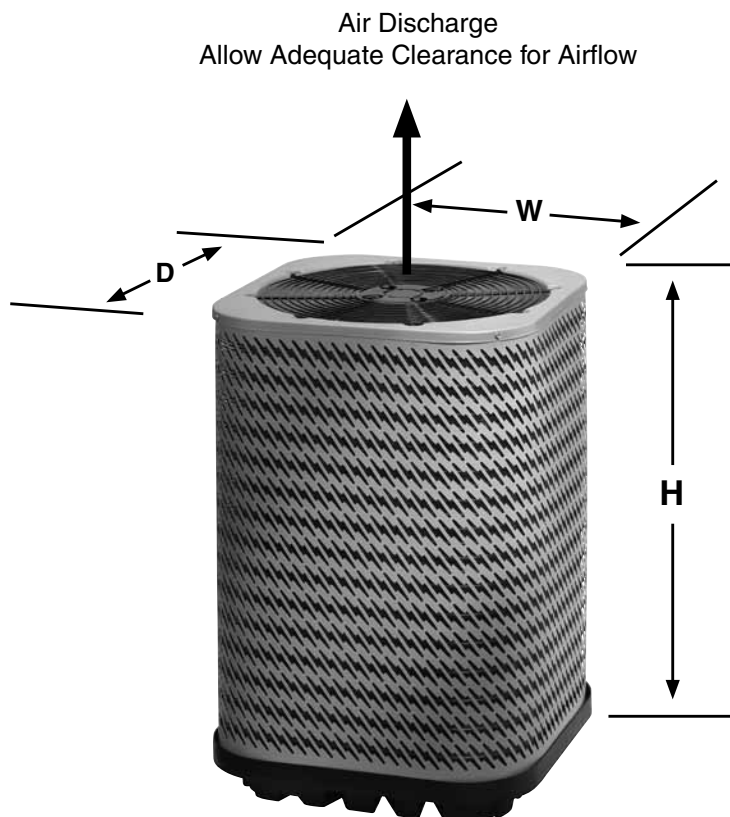

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

16 SEER — R-410A Extra High Efficiency — Single Phase

Model Number JS4BF-			024K	030K	036K	042K	048K	060KC
Electrical Data	Volts-Cycles-Phase (1)		208/230-60-1					
	Total Amps		14.1	13.7	15.1	19.4	22.4	31.4
	Delay Fuse Max. (2)		30	25	30	40	45	60
	Min. Circuit Ampacity		17.5	16.9	18.6	23.9	27.4	38.6
Component Data	Coil	Area	13.3	15.2	22.8	25.3	25.3	25.4
		Rows-FPI	1-23	1-18	1-18	1-23	1-23	1-23
		Tube Dia	MC					
	Fan Motor	Type	PSC				BLDC	
		Amps	0.7	0.9	1.0	1.5	2.6	2.6
		HP	0.10	0.13	0.20	0.25	0.33	0.33
	Compressor Data	RLA	13.4	12.8	14.1	17.9	19.8	28.8
		LRA	58.3	64.0	77.0	112.0	109.0	152.9
Refrigerant suction line O.D. NOTE: Liquid line is 3/8" O.D. for entire length.		0-24 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"
		25-39 ft.	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (3)
		40-75 ft.	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (3)
Approximate Weight (lbs.)		Net	164	179	198	208	218	186
		Ship	171	187	207	217	227	195

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 1-1/8" to 7/8" reducer from line to unit.

(4) Use of a 3/4" linset will result in approximately 2% loss in capacity.

(5) Additional charge for line sets above 15 feet.

Values based on suction line as follows with 3/8" liquid line.

a) 3/4" = 0.6 oz. per additional foot.

b) 7/8" = 0.7 oz. per additional foot.

c) 1 1/8" = 0.8 oz. per additional foot.

ACCESSORIES - Condensing Unit

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Extreme Wind Condition Mounting Kit - 920900

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit Ampacity
200	150	100	50	
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

SYSTEM COOLING CAPACITIES

16 SEER — Extra High Efficiency — Single Phase

With this Air Handler						
Outdoor Unit	Indoor Unit	High Speed Capacity (BTU/h)	SEER	EER	Low Speed SCFM	High Speed SCFM
JS6BF-024K	B6EMMX24K-A	24,000	16.0	13.0	N/A	835
JS6BF-024K	B6EMMX24K-B	24,000	16.0	13.0	N/A	835
JS6BF-030K	B6EMMX30K-A	29,000	16.0	13.0	N/A	995
JS6BF-030K	B6EMMX30K-B	29,000	16.0	13.0	N/A	995
JS6BF-036K	B6EMMX36K-B	34,200	16.0	13.0	N/A	1035
JS6BF-042K	B6EMMX48K-C	40,000	16.00	13.00	N/A	1200
JS6BF-048K	B6EMMX48K-C	46,000	16.00	13.00	N/A	1500
JS4BF-060KC	B6EMMX60K-C	55,000	16	12.5	1600	1120

JS6BF-024K	B6VMAX24K-A	24,000	16.0	13.0	N/A	840
JS6BF-024K	B6VMAX24K-B	24,000	16.0	13.0	N/A	840
JS6BF-030K	B6VMAX30K-A	30,000	16.0	13.0	N/A	980
JS6BF-030K	B6VMAX30K-B	30,000	16.0	13.0	N/A	980
JS6BF-036K	B6VMAX36K-B	35,600	16.0	13.0	N/A	1045
JS6BF-042K	B6VMAX48K-C	41,000	16.00	13.00	N/A	1250
JS6BF-048K	B6VMAX48K-C	46,000	16.00	13.00	N/A	1400
JS4BF-060KC	B6VMAX60K-C	55,000	16	12.5	1600	1120

With this Coil						
Outdoor Unit	Indoor Unit	High Speed Capacity (BTU/h)	SEER	EER	Low Speed SCFM	High Speed SCFM
JS6BF-024K	C7B(A,H)M01824(C,U)-A + TXV	24,000	14.0	12.2	N/A	845
JS6BF-024K	C7B(A,H)M01824(C,U)-B + TXV	24,000	14.0	12.2	N/A	845
JS6BF-030K	C7B(A,H)M03036(C,U)-A + TXV	27,800	14.0	12.2	N/A	860
JS6BF-030K	C7B(A,H)M03036(C,U)-B + TXV	27,800	14.0	12.2	N/A	860
JS6BF-030K	C7B(A,H)M030(C,U)-C + TXV	27,800	14.0	12.2	N/A	860
JS6BF-036K	C7B(A,H)M03642(C,U)-B + TXV	35,000	14.0	12.2	N/A	1325
JS6BF-036K	C7B(A,H)M03648(C,U)-C + TXV	35,000	14.0	12.2	N/A	1325
JS6BF-042K	C7B(A,H)M03648(C,U)-C+ TXV	40,000	14.00	12.20	N/A	1200
JS6BF-048K	C7B(A,H)M048(C,U)-C+ TXV	46,000	14.50	12.00	N/A	1500
JS4BF-060KC	C6B(A,H)-X60(C,U)-C+MB7VM(*)C	55,000	16	12.5	1600	1120

Air handlers and coils used in tables are designed and manufactured by NORDYNE.

See current AHRI Directory for certified combinations and ratings.

www.ahridirectory.org

EXPANDED COOLING PERFORMANCE - LOOSE COIL

JS6BF-024K C7B(A,H)M01824(C,U)-B + TXV

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	23.9	18.7	1.42	23.0	18.6	1.59	22.1	18.7	1.76	21.1	18.4	1.96	20.00	19.40	2.18	18.87	18.31	2.43
	80	67	26.1	15.0	1.43	25.1	14.9	1.60	24.0	15.1	1.77	22.9	14.8	1.97	21.71	14.57	2.19	20.42	13.64	2.44
	80	72	28.7	11.7	1.43	27.6	11.6	1.61	26.4	11.9	1.79	25.2	11.6	1.99	23.85	11.46	2.21	22.35	11.74	2.48
	75	62	23.7	15.2	1.42	22.8	15.1	1.59	21.9	15.2	1.76	20.9	14.9	1.96	19.75	13.74	2.18	18.57	14.74	2.43
800	80	62	24.5	20.2	1.46	23.6	20.6	1.63	22.6	20.1	1.80	21.6	20.0	2.00	20.62	19.82	2.22	19.65	19.49	2.47
	80	67	26.7	15.9	1.46	25.6	16.4	1.64	24.5	16.0	1.81	23.3	15.8	2.01	22.10	15.85	2.23	20.75	15.83	2.49
	80	72	29.3	12.3	1.47	28.2	12.8	1.65	26.9	12.5	1.83	25.6	12.4	2.03	24.20	12.46	2.26	22.62	12.53	2.52
	75	62	24.2	16.1	1.46	23.3	16.5	1.62	22.3	16.1	1.80	21.2	15.9	2.00	20.10	15.86	2.22	18.95	16.29	2.47
900	80	62	25.0	21.8	1.50	24.1	21.9	1.66	23.2	21.4	1.84	22.3	21.2	2.04	21.33	20.61	2.26	20.21	20.13	2.51
	80	67	27.1	17.1	1.50	26.1	17.3	1.67	24.9	16.9	1.85	23.7	16.8	2.05	22.39	16.71	2.27	21.00	16.78	2.53
	80	72	29.8	13.1	1.51	28.6	13.4	1.69	27.3	13.0	1.88	25.9	13.1	2.07	24.37	13.04	2.30	22.81	13.17	2.56
	75	62	24.7	17.3	1.50	23.7	17.4	1.66	22.7	17.0	1.84	21.6	16.9	2.04	20.43	17.31	2.26	19.20	17.34	2.50

JS6BF-030K C7B(A,H)M03036(C,U)-B + TXV

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
875	80	62	29.5	22.0	1.67	28.3	21.8	1.84	27.4	23.3	2.03	26.1	23.0	2.25	24.78	24.27	2.50	23.30	22.82	2.79
	80	67	32.0	18.2	1.67	30.7	18.1	1.84	29.4	18.2	2.04	28.0	17.9	2.26	26.51	17.58	2.51	24.88	16.63	2.80
	80	72	35.0	14.1	1.67	33.6	14.1	1.84	32.2	14.4	2.04	30.6	14.1	2.26	29.01	13.87	2.52	27.19	14.23	2.82
	75	62	29.3	18.5	1.67	28.2	18.3	1.84	27.0	18.4	2.03	25.7	18.0	2.25	24.32	16.57	2.50	22.78	17.77	2.79
1000	80	62	30.5	25.2	1.72	29.3	25.7	1.89	28.0	25.2	2.08	26.8	25.0	2.30	25.69	24.74	2.55	24.41	24.21	2.85
	80	67	32.7	19.3	1.72	31.4	19.8	1.89	30.0	19.3	2.08	28.6	19.1	2.30	27.00	19.05	2.56	25.30	18.99	2.85
	80	72	35.7	14.8	1.72	34.2	15.5	1.89	32.7	15.0	2.09	31.0	14.9	2.31	29.25	15.08	2.57	27.27	15.15	2.86
	75	62	30.0	19.6	1.72	28.8	20.0	1.89	27.5	19.5	2.08	26.2	19.2	2.30	24.75	19.13	2.55	23.14	18.98	2.84
1125	80	62	31.1	27.3	1.76	29.9	27.5	1.94	28.9	26.8	2.13	27.9	26.5	2.35	26.53	25.64	2.60	25.04	24.94	2.90
	80	67	33.3	20.6	1.76	31.9	20.8	1.94	30.4	20.3	2.13	28.9	20.2	2.35	27.31	20.00	2.61	25.57	20.04	2.90
	80	72	36.2	15.9	1.76	34.6	16.2	1.93	32.9	15.8	2.13	31.1	15.8	2.35	29.42	15.68	2.61	27.57	15.81	2.91
	75	62	30.6	20.9	1.76	29.3	21.0	1.93	27.9	20.5	2.13	26.5	20.3	2.34	25.07	20.10	2.60	23.57	21.38	2.89

JS6BF-036K C7B(A,H)M03642(C,U)-B + TXV

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	35.8	28.0	2.01	34.5	27.8	2.23	33.0	27.9	2.46	31.5	27.4	2.73	29.79	28.60	3.04	28.05	26.93	3.37
	80	67	39.1	23.2	2.02	37.5	23.0	2.24	35.9	23.2	2.48	34.1	22.8	2.76	32.35	22.40	3.05	30.45	20.88	3.39
	80	72	43.0	18.0	2.05	41.3	17.9	2.27	39.4	18.3	2.52	37.4	17.9	2.78	35.19	17.65	3.07	33.06	18.04	3.41
	75	62	35.6	23.5	2.01	34.3	23.3	2.23	32.8	23.4	2.46	31.2	22.9	2.72	29.50	21.14	3.04	27.75	22.64	3.37
1200	80	62	36.7	30.0	2.07	35.2	30.5	2.29	33.7	29.8	2.52	32.1	29.3	2.79	30.40	29.00	3.10	28.72	28.48	3.43
	80	67	39.9	24.6	2.08	38.3	25.3	2.31	36.6	24.7	2.55	34.7	24.3	2.82	32.87	24.34	3.11	30.90	24.31	3.45
	80	72	43.7	19.0	2.11	41.7	19.8	2.33	39.6	19.2	2.58	37.7	19.0	2.84	35.67	19.07	3.14	33.53	19.14	3.47
	75	62	36.3	24.9	2.07	34.9	25.5	2.29	33.4	24.8	2.52	31.7	24.5	2.79	29.95	24.26	3.09	28.16	24.14	3.43
1350	80	62	37.3	32.1	2.12	35.8	32.2	2.35	34.3	31.3	2.58	32.7	30.8	2.86	31.09	30.04	3.16	29.49	29.37	3.50
	80	67	40.5	26.4	2.14	38.9	26.7	2.36	37.0	26.0	2.61	35.2	25.9	2.88	33.26	25.67	3.17	31.27	25.75	3.51
	80	72	44.0	20.3	2.16	42.1	20.6	2.39	40.2	20.0	2.64	38.2	20.0	2.90	36.07	19.84	3.20	33.85	20.03	3.53
	75	62	36.9	26.6	2.12	35.4	26.8	2.34	33.9	26.0	2.58	32.1	25.8	2.85	30.33	25.54	3.15	28.47	25.50	3.49

EXPANDED COOLING PERFORMANCE - LOOSE COIL (Continued)

JS6BF-042K C7B(A,H)M03648(C,U)-C+TXV

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	41.8	32.5	2.45	40.4	32.3	2.67	38.8	32.5	2.92	37.0	31.9	3.23	35.09	33.34	3.58	33.12	31.47	3.97
	80	67	45.9	26.9	2.45	44.2	26.8	2.67	42.4	27.1	2.94	40.4	26.6	3.25	38.31	26.19	3.59	36.12	24.36	3.98
	80	72	50.5	20.9	2.46	48.6	20.8	2.69	46.5	21.3	2.97	44.3	20.8	3.27	42.01	20.56	3.61	39.54	21.12	3.99
	75	62	41.7	27.2	2.45	40.2	27.0	2.66	38.6	27.3	2.92	36.8	26.7	3.22	34.87	24.79	3.58	32.87	26.54	3.97
1400	80	62	42.9	34.7	2.51	41.4	35.4	2.73	39.6	34.6	2.99	37.8	34.2	3.30	35.84	33.89	3.64	33.90	33.38	4.03
	80	67	46.9	28.6	2.52	45.2	29.5	2.74	43.2	28.7	3.01	41.1	28.4	3.32	38.94	28.48	3.66	36.66	28.51	4.05
	80	72	51.5	22.0	2.53	49.4	23.0	2.76	47.2	22.3	3.03	44.9	22.2	3.34	42.45	22.33	3.68	39.98	22.49	4.06
	75	62	42.6	28.9	2.51	41.1	29.6	2.73	39.4	28.9	2.99	37.4	28.6	3.30	35.44	28.52	3.64	33.37	28.30	4.03
1575	80	62	43.7	37.2	2.58	42.1	37.4	2.80	40.4	36.5	3.06	38.5	36.0	3.37	36.53	35.30	3.71	34.76	34.61	4.10
	80	67	47.6	30.6	2.58	45.8	31.0	2.81	43.8	30.3	3.08	41.7	30.2	3.38	39.41	30.04	3.73	37.09	30.22	4.12
	80	72	52.1	23.5	2.59	49.9	24.0	2.83	47.7	23.3	3.10	45.4	23.4	3.40	42.92	23.27	3.75	40.39	23.59	4.13
	75	62	43.3	30.9	2.58	41.7	31.2	2.80	39.9	30.5	3.06	37.9	30.2	3.37	35.92	29.89	3.71	33.75	29.91	4.10

JS6BF-048K C7B(A,H)M048(C,U)-C+TXV

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	48.4	37.3	2.62	46.7	37.0	2.88	44.7	37.2	3.20	42.6	36.5	3.54	40.39	38.26	3.94	38.06	36.05	4.38
	80	67	52.9	30.9	2.64	50.8	30.7	2.91	48.7	31.0	3.21	46.5	30.4	3.56	44.03	29.96	3.95	41.58	27.82	4.39
	80	72	58.1	24.0	2.67	55.9	23.9	2.93	53.5	24.4	3.23	51.0	24.0	3.58	48.17	23.65	3.96	45.31	24.29	4.40
	75	62	48.2	31.3	2.62	46.5	31.0	2.88	44.4	31.2	3.20	42.3	30.6	3.54	40.12	28.32	3.94	37.80	30.33	4.37
1600	80	62	49.5	39.8	2.69	47.7	40.6	2.96	45.5	39.6	3.27	43.4	39.1	3.62	41.16	38.83	4.01	38.91	38.32	4.45
	80	67	54.0	32.8	2.72	51.8	33.7	2.99	49.6	32.9	3.29	47.3	32.5	3.64	44.77	32.55	4.03	42.19	32.57	4.47
	80	72	59.1	25.3	2.75	56.8	26.5	3.01	54.2	25.7	3.31	51.4	25.5	3.65	48.72	25.63	4.04	45.91	25.79	4.47
	75	62	49.2	33.2	2.69	47.4	34.0	2.96	45.3	33.1	3.27	43.1	32.7	3.62	40.81	32.59	4.01	38.39	32.48	4.45
1800	80	62	50.4	42.6	2.78	48.5	42.8	3.04	46.3	41.8	3.35	44.2	41.3	3.70	41.93	40.52	4.09	39.87	39.70	4.53
	80	67	54.9	35.1	2.80	52.7	35.5	3.07	50.4	34.6	3.37	47.9	34.5	3.71	45.38	34.30	4.10	42.71	34.49	4.54
	80	72	59.6	27.0	2.82	57.3	27.6	3.08	54.8	26.8	3.38	52.1	26.8	3.73	49.33	26.68	4.12	46.44	27.02	4.55
	75	62	50.1	35.5	2.77	48.2	35.8	3.04	46.0	34.9	3.35	43.7	34.7	3.70	41.31	34.13	4.09	38.82	34.16	4.53

EXPANDED COOLING PERFORMANCE - AIR HANDLER

JS6BF-024K B6EMMX24K-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	24.4	19.1	1.27	23.6	19.0	1.43	22.6	19.2	1.61	21.6	18.9	1.80	20.52	19.91	2.03	19.40	18.82	2.28
	80	67	26.6	15.3	1.27	25.6	15.2	1.44	24.5	15.4	1.62	23.4	15.1	1.82	22.23	14.92	2.04	20.94	14.02	2.29
	80	72	29.2	11.9	1.28	28.1	11.8	1.45	27.0	12.1	1.64	25.7	11.9	1.84	24.37	11.71	2.06	22.87	12.01	2.33
	75	62	24.2	15.5	1.27	23.3	15.4	1.43	22.4	15.5	1.61	21.4	15.2	1.80	20.28	14.13	2.02	19.09	15.16	2.27
800	80	62	25.1	20.6	1.28	24.2	21.1	1.45	23.2	20.7	1.63	22.2	20.5	1.82	21.21	20.40	2.05	20.25	20.08	2.30
	80	67	27.3	16.3	1.29	26.2	16.8	1.46	25.1	16.4	1.64	23.9	16.2	1.84	22.70	16.27	2.06	21.35	16.29	2.31
	80	72	29.9	12.5	1.30	28.8	13.1	1.47	27.5	12.7	1.66	26.2	12.7	1.86	24.80	12.77	2.08	23.22	12.86	2.35
	75	62	24.8	16.5	1.28	23.9	16.9	1.45	22.9	16.5	1.63	21.8	16.4	1.82	20.70	16.33	2.04	19.55	16.81	2.29
900	80	62	25.7	22.4	1.30	24.8	22.6	1.47	23.8	22.1	1.65	23.0	21.8	1.84	22.00	21.26	2.07	20.89	20.80	2.32
	80	67	27.8	17.5	1.30	26.7	17.7	1.48	25.6	17.3	1.66	24.3	17.3	1.85	23.06	17.21	2.07	21.67	17.31	2.33
	80	72	30.5	13.4	1.31	29.2	13.7	1.49	27.9	13.4	1.68	26.6	13.4	1.87	25.04	13.40	2.10	23.48	13.56	2.37
	75	62	25.4	17.7	1.30	24.4	17.9	1.47	23.4	17.5	1.64	22.2	17.4	1.84	21.10	17.88	2.06	19.87	17.95	2.31

JS6BF-030K B6EMMX30K-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
875	80	62	29.5	23.3	1.68	28.4	23.2	1.86	27.4	23.3	2.05	26.2	23.0	2.27	24.95	24.21	2.52	23.60	22.90	2.80
	80	67	32.1	18.7	1.69	30.9	18.6	1.86	29.7	18.8	2.05	28.4	18.5	2.27	27.06	18.27	2.52	25.54	17.12	2.82
	80	72	35.5	14.5	1.68	34.1	14.5	1.86	32.8	14.9	2.05	31.4	14.6	2.27	29.82	14.45	2.53	27.93	14.81	2.86
	75	62	29.2	18.9	1.68	28.1	18.8	1.86	27.1	18.9	2.05	25.9	18.6	2.26	24.61	17.25	2.52	23.20	18.47	2.80
1000	80	62	30.2	25.1	1.73	29.1	25.6	1.90	28.0	25.1	2.09	26.8	24.9	2.31	25.74	24.78	2.57	24.56	24.35	2.86
	80	67	32.8	19.9	1.73	31.6	20.5	1.90	30.3	20.0	2.10	29.0	19.8	2.32	27.56	19.85	2.57	25.97	19.85	2.87
	80	72	36.2	15.3	1.73	34.8	16.1	1.90	33.3	15.6	2.10	31.8	15.6	2.32	29.96	15.73	2.58	28.02	15.75	2.91
	75	62	29.9	20.1	1.73	28.8	20.6	1.90	27.6	20.1	2.09	26.4	19.9	2.31	25.06	19.85	2.56	23.60	19.78	2.85
1125	80	62	30.9	27.1	1.77	29.8	27.3	1.95	28.8	26.7	2.14	27.8	26.4	2.36	26.60	25.70	2.61	25.27	25.16	2.91
	80	67	33.4	21.3	1.78	32.1	21.6	1.95	30.8	21.1	2.14	29.4	21.0	2.36	27.94	20.92	2.62	26.28	21.01	2.92
	80	72	36.6	16.4	1.77	35.0	16.8	1.95	33.5	16.4	2.15	32.0	16.4	2.37	30.33	16.35	2.63	28.38	16.48	2.96
	75	62	30.4	21.5	1.78	29.3	21.7	1.95	28.1	21.2	2.14	26.8	21.1	2.36	25.44	20.93	2.61	23.99	21.61	2.90

JS6BF-036K B6EMMX36K-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	35.6	28.2	1.79	34.3	28.0	2.01	32.8	28.2	2.25	31.3	27.6	2.51	29.73	28.82	2.81	28.00	27.15	3.15
	80	67	38.9	23.3	1.80	37.3	23.2	2.03	35.7	23.4	2.27	34.0	23.0	2.53	32.20	22.62	2.83	30.28	21.18	3.17
	80	72	42.7	18.0	1.83	41.0	17.9	2.05	39.2	18.3	2.29	37.2	18.0	2.56	35.05	17.72	2.85	32.92	18.12	3.20
	75	62	35.4	23.6	1.79	34.0	23.4	2.01	32.6	23.6	2.25	31.0	23.1	2.51	29.35	21.30	2.81	27.60	22.82	3.15
1200	80	62	36.5	30.3	1.82	35.1	30.8	2.04	33.7	30.1	2.28	32.1	29.6	2.54	30.48	29.24	2.84	28.85	28.61	3.19
	80	67	39.7	24.8	1.83	38.2	25.5	2.06	36.5	24.9	2.30	34.7	24.7	2.56	32.79	24.67	2.86	30.80	24.66	3.20
	80	72	43.4	19.0	1.86	41.5	19.9	2.08	39.6	19.3	2.32	37.7	19.1	2.59	35.63	19.22	2.88	33.47	19.30	3.22
	75	62	36.2	25.2	1.82	34.8	25.7	2.04	33.2	25.0	2.28	31.6	24.7	2.54	29.90	24.62	2.84	28.10	24.51	3.18
1350	80	62	37.3	32.4	1.85	35.9	32.5	2.07	34.4	31.6	2.31	32.8	31.1	2.57	31.31	30.25	2.87	29.68	29.56	3.22
	80	67	40.4	26.7	1.86	38.7	27.0	2.09	37.0	26.4	2.33	35.2	26.3	2.59	33.26	25.99	2.89	31.22	26.10	3.23
	80	72	43.9	20.4	1.89	42.1	20.8	2.11	40.2	20.2	2.35	38.2	20.2	2.62	36.11	20.07	2.91	33.88	20.29	3.25
	75	62	36.8	26.9	1.84	35.4	27.1	2.07	33.8	26.4	2.30	32.1	26.3	2.57	30.36	26.01	2.87	28.52	25.98	3.21

EXPANDED COOLING PERFORMANCE - AIR HANDLER (Continued)

JS6BF-042K B6EMMX48K-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	42.3	33.0	2.24	40.9	32.8	2.46	39.3	33.1	2.71	37.6	32.5	3.02	35.66	33.99	3.38	33.67	32.08	3.76
	80	67	46.3	27.4	2.24	44.6	27.2	2.47	42.8	27.6	2.73	40.8	27.0	3.04	38.77	26.66	3.39	36.61	24.88	3.78
	80	72	51.0	21.3	2.25	49.1	21.2	2.48	47.0	21.7	2.76	44.7	21.3	3.06	42.28	21.01	3.41	39.68	21.54	3.79
	75	62	42.1	27.7	2.24	40.7	27.5	2.46	39.1	27.8	2.71	37.3	27.3	3.02	35.37	25.28	3.37	33.37	27.05	3.76
1400	80	62	43.4	35.4	2.27	41.9	36.1	2.49	40.3	35.4	2.75	38.4	34.9	3.06	36.48	34.60	3.41	34.49	34.19	3.80
	80	67	47.4	29.2	2.28	45.7	30.0	2.50	43.8	29.3	2.77	41.6	29.0	3.08	39.52	29.06	3.42	37.27	29.09	3.81
	80	72	52.0	22.4	2.29	49.8	23.5	2.52	47.5	22.8	2.80	45.2	22.6	3.10	42.88	22.78	3.44	40.40	22.91	3.83
	75	62	43.1	29.5	2.27	41.6	30.3	2.50	39.9	29.6	2.75	38.1	29.2	3.06	36.03	29.14	3.41	34.00	28.90	3.80
1575	80	62	44.4	38.0	2.31	42.8	38.2	2.53	41.1	37.3	2.79	39.2	36.8	3.11	37.34	36.08	3.45	35.53	35.38	3.84
	80	67	48.2	31.3	2.32	46.5	31.7	2.54	44.4	31.0	2.82	42.3	30.9	3.12	40.12	30.73	3.46	37.80	30.91	3.85
	80	72	52.4	24.1	2.32	50.4	24.6	2.56	48.2	23.8	2.83	45.9	23.9	3.14	43.49	23.76	3.48	40.96	24.05	3.87
	75	62	43.9	31.7	2.31	42.4	32.0	2.53	40.6	31.3	2.79	38.6	30.9	3.10	36.58	30.59	3.45	34.49	30.64	3.83

JS6BF-048K B6EMMX48K-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	48.7	37.9	2.48	46.9	37.6	2.75	44.9	37.8	3.07	42.9	37.1	3.43	40.68	38.77	3.83	38.43	36.63	4.26
	80	67	53.1	31.4	2.50	51.0	31.1	2.79	48.9	31.5	3.09	46.6	30.9	3.45	44.23	30.42	3.84	41.77	28.38	4.29
	80	72	58.4	24.4	2.54	56.2	24.3	2.81	53.7	24.8	3.12	50.9	24.4	3.47	47.95	24.01	3.86	45.25	24.58	4.30
	75	62	48.4	31.8	2.48	46.7	31.5	2.75	44.6	31.7	3.07	42.6	31.1	3.42	40.37	28.83	3.82	38.08	30.84	4.26
1600	80	62	49.9	40.6	2.53	48.1	41.4	2.80	46.0	40.4	3.12	43.9	39.9	3.48	41.64	39.51	3.88	39.35	39.02	4.31
	80	67	54.4	33.4	2.55	52.2	34.3	2.83	49.9	33.5	3.14	47.5	33.1	3.50	45.08	33.13	3.89	42.50	33.14	4.33
	80	72	59.3	25.8	2.59	56.6	26.9	2.85	54.1	26.1	3.17	51.5	25.8	3.51	48.85	25.98	3.91	46.05	26.11	4.35
	75	62	49.5	33.8	2.53	47.7	34.6	2.80	45.6	33.7	3.12	43.4	33.3	3.47	41.16	33.23	3.87	38.76	32.92	4.31
1800	80	62	51.0	43.6	2.58	49.0	43.8	2.86	46.9	42.6	3.17	44.8	42.1	3.53	42.61	41.17	3.92	40.52	40.34	4.37
	80	67	55.3	35.9	2.61	53.1	36.2	2.88	50.7	35.4	3.19	48.3	35.2	3.54	45.76	35.01	3.94	43.15	35.18	4.38
	80	72	60.0	27.5	2.64	57.6	28.1	2.90	55.0	27.2	3.21	52.3	27.2	3.56	49.53	27.06	3.96	46.63	27.36	4.39
	75	62	50.5	36.3	2.57	48.5	36.6	2.86	46.4	35.7	3.17	44.1	35.2	3.52	41.76	34.86	3.92	39.30	34.89	4.36

EXPANDED COOLING PERFORMANCE - AIR HANDLER (Continued)

JS4BF-060KC B6VMAX60K-C High Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1450	80	62	56.8	43.7	3.24	54.6	43.4	3.54	52.4	43.6	3.90	50.0	42.9	4.33	47.56	45.15	4.81	44.96	42.68	5.36
	80	67	61.9	35.7	3.26	59.5	35.4	3.56	57.0	35.9	3.93	54.3	35.2	4.35	51.57	34.80	4.85	48.58	32.72	5.40
	80	72	67.7	27.6	3.27	65.0	27.5	3.58	62.4	28.1	3.95	59.5	27.6	4.39	56.52	27.23	4.88	53.36	28.01	5.45
	75	62	56.6	36.3	3.23	54.3	36.0	3.54	52.0	36.3	3.90	49.6	35.6	4.32	47.19	33.33	4.81	44.51	35.70	5.36
1600	80	62	58.0	46.2	3.28	55.7	47.1	3.59	53.4	46.1	3.95	51.0	45.6	4.37	48.46	45.55	4.86	45.85	45.35	5.41
	80	67	62.9	37.5	3.30	60.4	38.6	3.61	57.8	37.7	3.97	55.0	37.4	4.40	52.21	37.50	4.89	49.32	37.85	5.45
	80	72	68.9	28.8	3.31	66.2	30.1	3.63	63.4	29.3	4.00	60.4	29.1	4.43	57.33	29.33	4.93	54.06	29.61	5.50
	75	62	57.5	38.2	3.28	55.3	39.1	3.59	52.9	38.1	3.95	50.5	38.0	4.37	47.92	37.94	4.86	45.18	37.87	5.40
1750	80	62	59.0	49.2	3.33	56.7	49.5	3.63	54.3	48.5	4.00	51.8	48.2	4.42	49.41	47.62	4.91	47.04	46.84	5.47
	80	67	63.8	39.9	3.34	61.2	40.5	3.66	58.5	39.5	4.02	55.8	39.4	4.45	52.94	39.53	4.94	49.86	39.80	5.50
	80	72	69.8	30.6	3.36	67.0	31.3	3.67	64.1	30.4	4.04	61.1	30.5	4.48	57.91	30.46	4.98	54.56	30.97	5.55
	75	62	58.5	40.5	3.32	56.1	41.1	3.63	53.7	40.2	3.99	51.2	40.0	4.41	48.55	39.68	4.90	45.73	39.80	5.45

JS4BF-060KC B6VMAX60K-C Low Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
970	80	62	39.3	29.1	1.98	37.9	29.3	2.28	36.2	29.5	2.62	34.4	28.9	3.00	32.38	30.53	3.45	30.29	28.55	3.93
	80	67	43.1	24.1	1.95	41.3	23.9	2.26	39.5	24.2	2.60	37.4	23.7	3.00	35.27	23.27	3.43	32.94	21.62	3.91
	80	72	47.3	18.9	1.92	45.4	18.8	2.23	43.2	19.1	2.59	41.1	18.7	2.97	38.82	18.35	3.40	36.33	18.77	3.89
	75	62	39.2	24.5	1.98	37.6	24.3	2.29	36.0	24.4	2.62	34.2	23.9	3.00	32.07	21.82	3.45	29.94	23.48	3.93
1120	80	62	41.6	33.2	1.98	39.9	33.8	2.29	38.1	33.1	2.63	36.1	32.7	3.02	34.06	32.50	3.46	32.09	31.82	3.94
	80	67	45.2	26.9	1.95	43.3	27.7	2.26	41.2	27.0	2.61	39.0	26.6	3.01	36.79	26.62	3.44	34.38	26.76	3.92
	80	72	49.6	20.7	1.92	47.5	21.6	2.24	45.2	20.9	2.60	42.9	20.7	2.98	40.39	20.79	3.41	37.71	20.87	3.90
	75	62	41.3	27.4	1.98	39.6	28.0	2.29	37.8	27.5	2.63	35.9	27.1	3.02	33.62	26.92	3.46	31.33	26.74	3.94
1270	80	62	42.8	36.3	1.99	41.0	36.4	2.30	39.1	35.6	2.64	37.2	35.2	3.04	35.35	34.15	3.47	33.33	33.19	3.95
	80	67	46.3	29.3	1.96	44.3	29.6	2.28	42.2	28.9	2.63	40.0	29.0	3.02	37.58	28.73	3.45	35.03	28.80	3.94
	80	72	50.7	22.4	1.93	48.4	22.8	2.25	46.1	22.1	2.61	43.7	22.1	3.00	41.07	22.00	3.43	38.25	22.24	3.92
	75	62	42.4	29.9	1.99	40.6	30.2	2.30	38.7	29.4	2.65	36.5	29.2	3.04	34.35	28.84	3.48	31.99	28.78	3.96



For current Energy
Star Information
please refer to
www.energystar.gov



GENERAL TERMS OF LIMITED WARRANTY

NORDYNE will furnish a replacement for any part of this product which fails in normal use and service within the first ten years of installation, in accordance with the terms of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the NORDYNE warranty department for a copy.

NORDYNE
COMPLETE COMFORT. GENUINE VALUE.

8000 Phoenix Parkway | O'Fallon, MO 63368-3827

Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (11/2013)

153E-1113