



Submittal:DXH12ESK3IL **Standard Efficiency Heat Pump**

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted To:	For:	
Unit Designation:	Schedule #:	

- Features:**
- Inverter-driven Compressor and Fan
 - Flared Piping Connections
 - Wireless Remote Controller Included
 - Anti-corrosion coils
 - Intelligent defrost
 - Auto-Restart
 - Easy diagnosis
 - Limited 5-year parts & 7-year compressor warranty



SYSTEM RATINGS	
Rated Cooling Capacity (Btu):	12,000
Minimum Cooling Capacity (Btu):	3,070
Maximum Cooling Capacity (Btu):	13,300
Rated Heating Capacity (Btu):	12,000
Minimum Heating Capacity (Btu):	3,070
Maximum Heating Capacity (Btu):	14,600
SEER:	19.0
EER:	9.75
HSPF:	8.5
COP:	11.95
METERING DEVICE	
Location	ODU
Type	Capillary



OUTDOOR UNIT DATA	
Compressor	
Type:	R-32
RLA:	8
Fan Motor	
Output Power(W):	30
RLA:	0.8
Sound Pressure (dBA):	52
Physical Characteristics	
Net Weight (lbs):	56.2
Dimensions (in)	
W:	28.8
H:	21.8
D:	12.9

Operation Range (Outdoor Ambient)	
Cooling (Min-Max)°F:	0~118
Heating (Min-Max)°F:	-13~75
Power Supply	
Voltage (Min-Max):	187/253
Minimum Circuit Ampacity (MCA):	12
Max. Overcurrent Protection (MOCP):	15


Refrigerant Piping Data	
Refrigerant Type:	R-32
Pre-charged Amount (Oz):	17.6
Pre-Charged Length (ft):	24.6
Additional amount (Oz/ft.):	0.2
Max. Piping Length (ft):	65.6
Max. Piping Height (ft):	40.0
ODU Connection Size (Gas):	3/8"
ODU Connection Size (Liquid):	1/4"

Submittal: DXH12ESK3IL

Outdoor Unit Dimensions

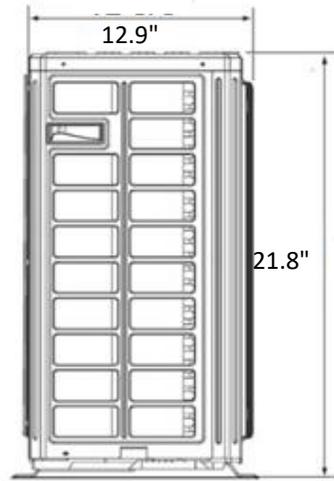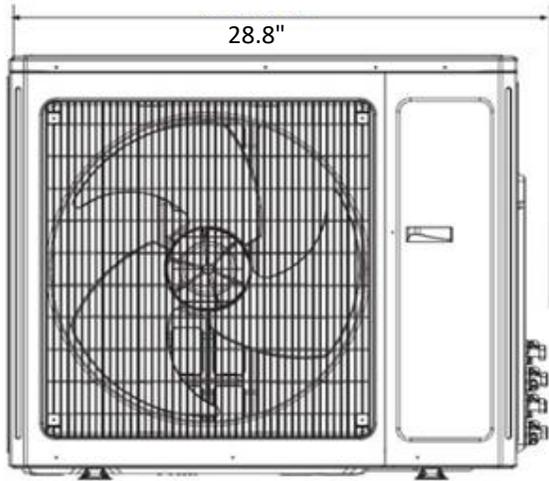

Outdoor Unit Minimum Clearances

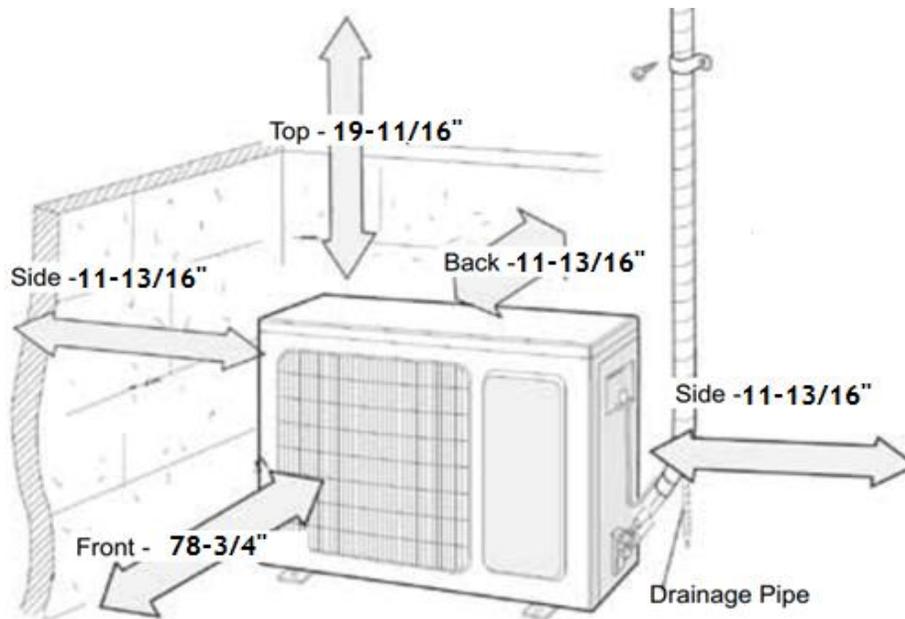


Specifications are subject to change without notice.



Submittal:DHH12ESK3IL **Standard Efficiency Heat Pump**

- Features:**
- Inverter-driven Variable Speed Blower
 - Flared Piping Connections
 - Wireless Remote Controller Included
 - Anti-corrosion coils
 - iFeel Operation
 - Air Filters Included
 - Turbo Cooling
 - Intelligent Preheating
 - Child Lock Function

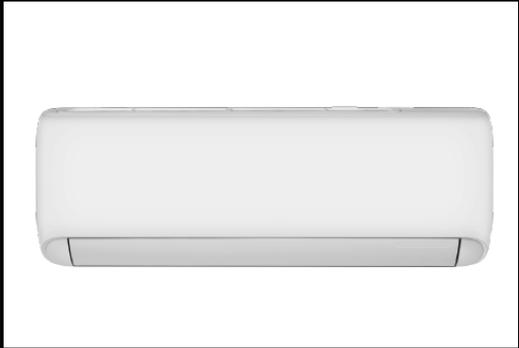


Indoor Unit Data


Blower Data	
CFM (Max/Min):	424/182
Output (W):	55
RLA:	0.7
Capacitor Rating (µF):	NA
Sound Pressure	
Cooling dB (A) (Min/Max):	22/47

Physical Characteristics	
Net Weight (lbs):	19.8
Dimensions (in.)	
W:	32.8
H:	10.8
D:	7.8
Piping Connection Size	
"Liquid":	1/4"
Gas:	3/8"

Dimensions

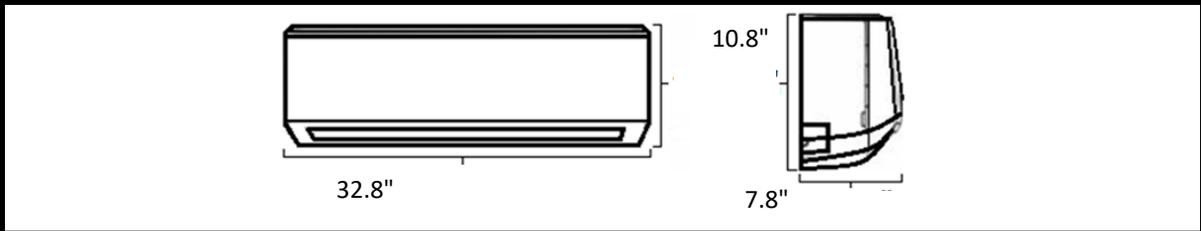

Clearances

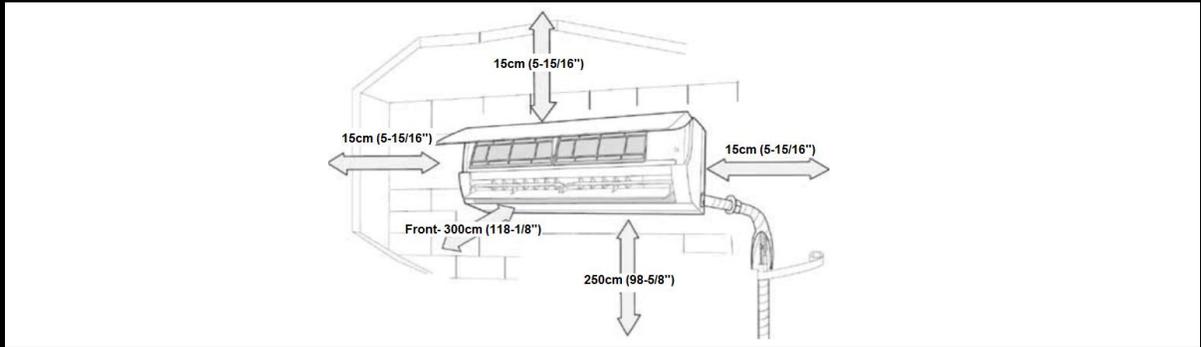

Specifications & illustrations are subject to change without notice or incurring obligations.
 O'Fallon, MO ©Nordyne, LLC 2024. All Rights Reserved. 039G (11/24)

ODU SKU: 1049119
IDU SKU: 1049118