



Submittal: DXH09PSK3IH High Efficiency Heat Pump

| | | |
|-------------------|-------------|-------|
| Job Name: | Location: | Date: |
| Purchaser: | Engineer: | |
| Submitted To: | For: | |
| Unit Designation: | Schedule #: | |

- Features:**
- Inverter-driven Compressor and Fan
 - Flared Piping Connections
 - Wireless Remote Controller Included
 - Anti-corrosion coils
 - Intelligent defrost
 - Auto-Restart
 - Easy diagnosis
 - Limited 5-year parts & 7-year compressor warranty



| SYSTEM RATINGS | |
|---------------------------------|--------|
| Rated Cooling Capacity (Btu): | 9,100 |
| Minimum Cooling Capacity (Btu): | 2,730 |
| Maximum Cooling Capacity (Btu): | 12,966 |
| Rated Heating Capacity (Btu): | 10,500 |
| Minimum Heating Capacity (Btu): | 2,388 |
| Maximum Heating Capacity (Btu): | 15,013 |
| SEER: | 26.0 |
| EER: | 12.86 |
| HSPF: | 15.0 |
| COP: | 10.4 |
| METERING DEVICE | |
| Location | ODU |
| Type | EEV |


| OUTDOOR UNIT DATA | |
|---------------------------------|--------|
| Compressor | |
| Type: | Rotary |
| RLA: | 6.5 |
| Fan Motor | |
| Output Power(W): | 30 |
| RLA: | 0.96 |
| Sound Pressure (dBA): | 52 |
| Physical Characteristics | |
| Net Weight (lbs): | 70.6 |
| Dimensions (in) | |
| W: | 31.5 |
| H: | 21.8 |
| D: | 13.7 |

| Operation Range (Outdoor Ambient) | |
|-------------------------------------|---------|
| Cooling (Min-Max)°F: | -20~122 |
| Heating (Min-Max)°F: | -22~86 |
| Power Supply | |
| Voltage (Min-Max): | 187/253 |
| Minimum Circuit Ampacity (MCA): | 10 |
| Max. Overcurrent Protection (MOCP): | 15 |


| Refrigerant Piping Data | |
|-------------------------------|------|
| Refrigerant Type: | R-32 |
| Pre-charged Amount (Oz): | 30.0 |
| Pre-Charged Length (ft): | 24.6 |
| Additional amount (Oz/ft.): | 0.2 |
| Max. Piping Length (ft): | 65.0 |
| Max. Piping Height (ft): | 40.0 |
| ODU Connection Size (Gas): | 3/8" |
| ODU Connection Size (Liquid): | 1/4" |

Submittal: DXH09PSK3IH

Outdoor Unit Dimensions

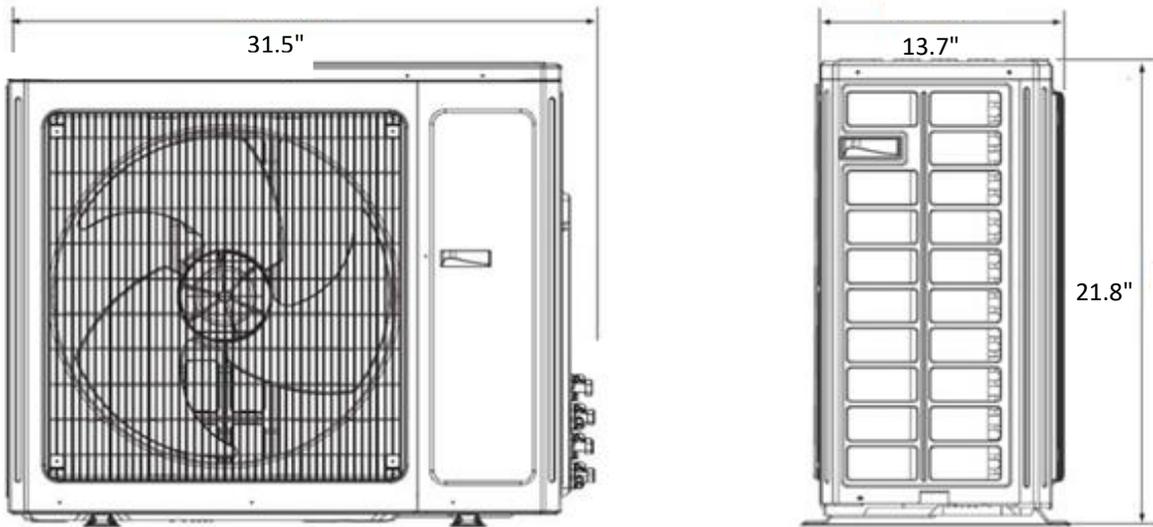

Outdoor Unit Minimum Clearances

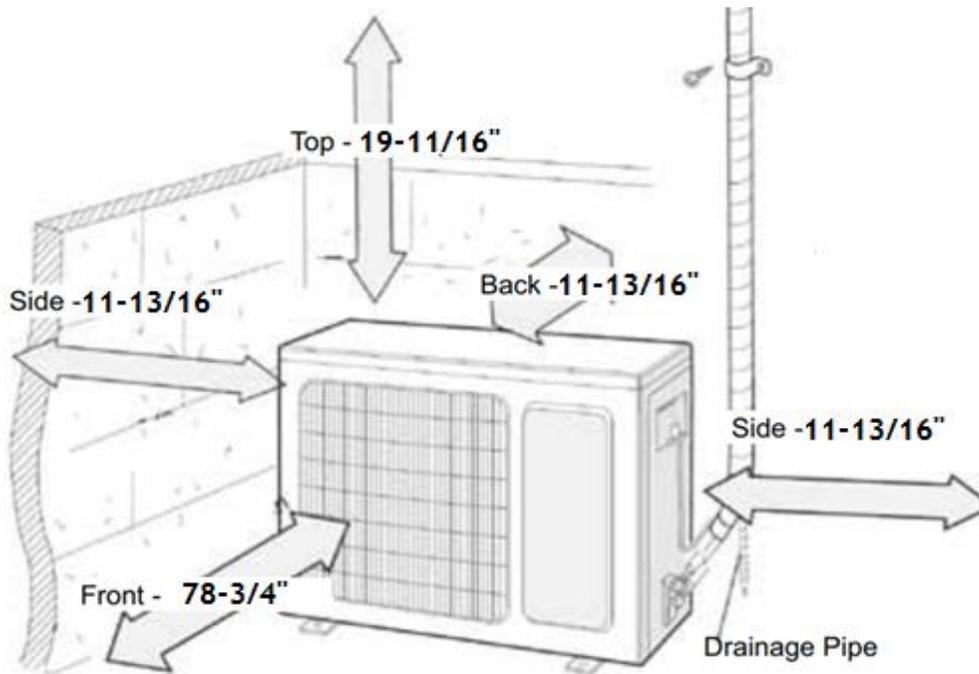

Specifications are subject to change without notice.




Submittal: DHH09PUK3IH

High Efficiency Heat Pump

Features:

- Inverter-driven Variable Speed Blower
- Flared Piping Connections
- Wireless Remote Controller Included
- Anti-corrosion coils
- iFeel Operation
- Air Filters Included
- Turbo Cooling
- Child Lock Function

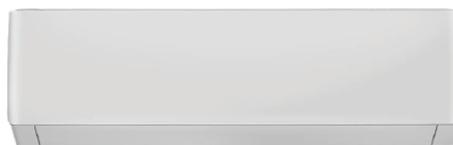

Indoor Unit Data

Blower Data

| | |
|------------------------|---------|
| CFM (Max/Min): | 353/129 |
| Output (W): | 15 |
| RLA: | 0.35 |
| Capacitor Rating (µF): | N/A |

Sound Pressure

| | |
|---------------------------|-------|
| Cooling dB (A) (Min/Max): | 20/41 |
|---------------------------|-------|


Physical Characteristics

| | |
|-------------------------|------|
| Net Weight (lbs): | 20.9 |
| Dimensions (in.) | |
| W: | 32.4 |
| H: | 11.5 |
| D: | 7.7 |


Piping Connection Size

| | |
|-----------|------|
| "Liquid": | 1/4" |
| Gas: | 3/8" |

Dimensions

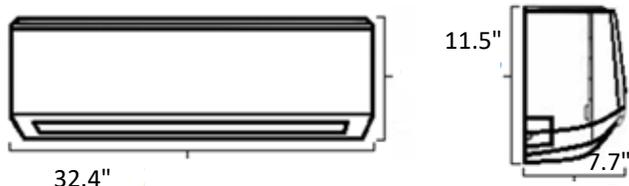

Clearances

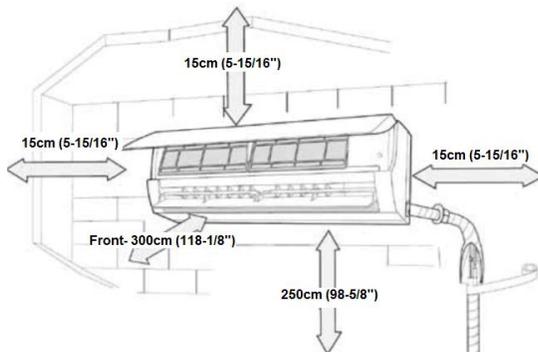

Specifications & illustrations are subject to change without notice or incurring obligations.
 O'Fallon, MO ©Nordyne, LLC 2024. All Rights Reserved. 044G (11/24)

ODU SKU: 1049129
IDU SKU: 1049128