


MAYTAG

TECHNICAL SPECIFICATIONS

Model MSH4BD Series

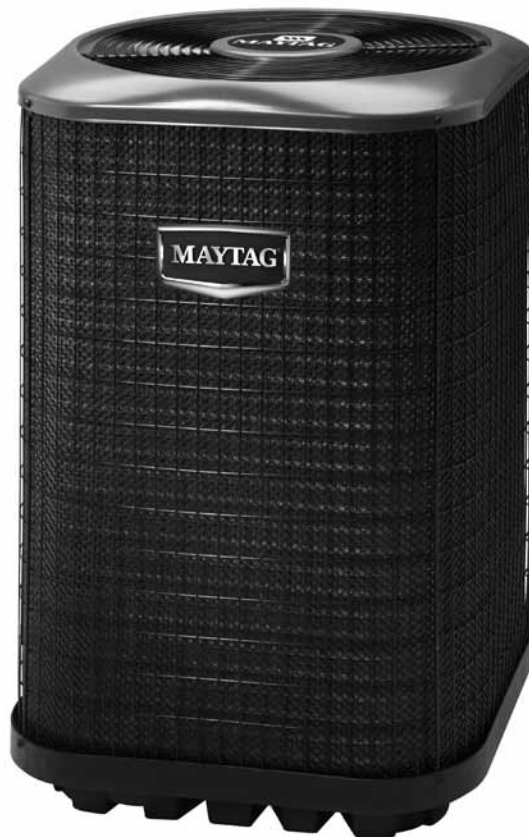

M120 Product Line

**High Efficiency R-410A Heat Pump
13 SEER — 1.5 - 5 Ton Capacity**

- **12 YEAR ALL PARTS WARRANTY**
- **This product offers a 1 Year Dependability Promise to replace the unit if the compressor fails in the first year of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil to qualify.**
- **Product registration required for 12-year All Parts Warranty and 1 year Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytaghvac.com or ask your sales representative.**




Maytag now offers the choice of a heat pump that uses a more efficient and environmentally friendly refrigerant designated R-410A. The MSH4BD Series of heat pumps offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.

Features and Benefits

- **SmartCool™ 410™ Refrigerant (R-410A)** – Earth friendly non-ozone depleting refrigerant.
- **Designed using galvanized steel** – with a polyester urethane coat finish. The 950 hour salt spray finish resists corrosion 50% better than comparable units.
- **Copper Tube / Aluminum Fin Coils** – Both indoor and outdoor coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **High Pressure Switch** – Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter Drier** – Included with unit, field installed.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Composite Base Pan** - Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.


DIMENSIONS/OUTDOOR SECTION

MSH4BD	018K	024K	030K	036K	042K	048K	060K
H	33 1/2	37 1/2	41 1/2	45 1/2	41 1/2	45 1/2	45 1/2
W	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4
D	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4

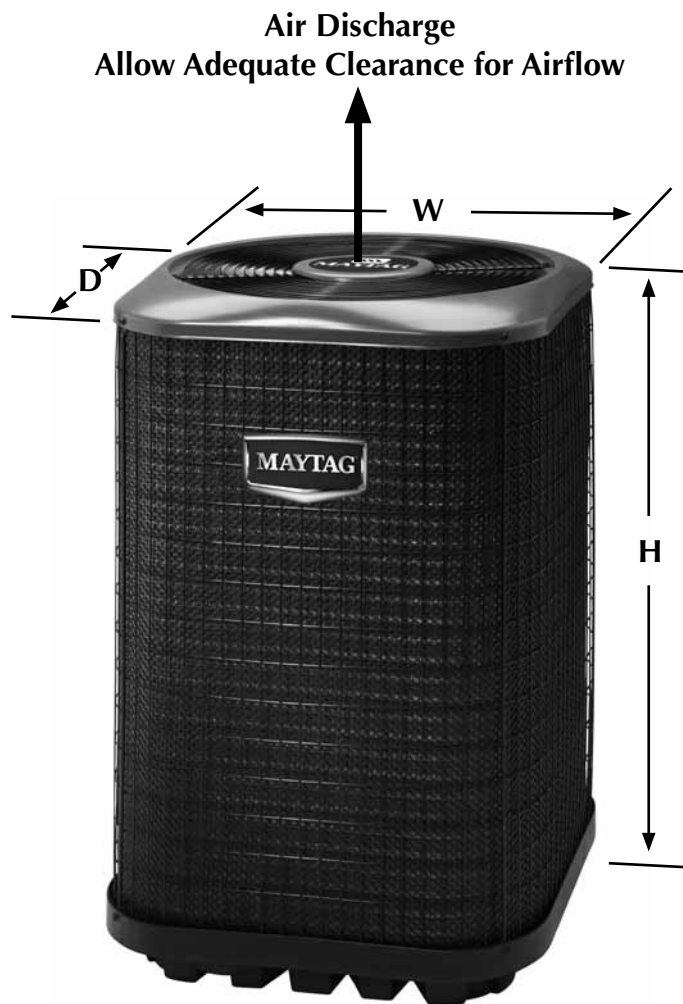

IDENTIFICATION CODE

EX: MSH4BD-036K

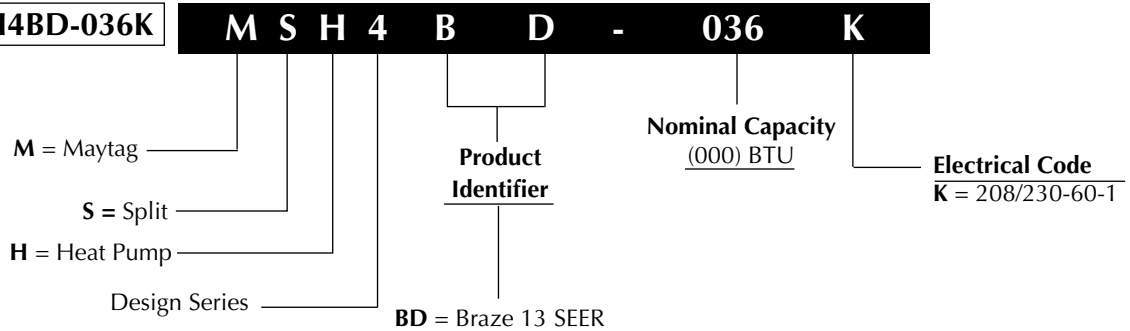

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

13 SEER — High Efficiency — Single Phase

Model Number MSH4BD			018K	024K	030K	036K	042K	048K	060K
Electrical Data	Volts-Cycles-Phase (1)		208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1
	Total Amps		10.2	14.6	15.3	17.8	19.4	23.2	27.7
	Delay Fuse Max. (2)		20	30	30	35	40	50	60
	Min. Circuit Ampacity		12.4	18.0	18.8	22.0	23.9	28.7	34.3
Condenser Data	Coil	Area	17.7	20.3	22.8	25.3	22.8	25.3	25.3
		Rows-FPI	1-18	1-18	1-20	1-20	2-16	2-16	2-16
		Tube Dia	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	1.2	1.2	1.2	1.2	1.46	1.46	1.46
		HP	0.2	0.2	0.2	0.2	0.25	0.25	0.25
	Fan Blade	Dia - # Blades	24" - 2						
		SCFM	3000	3200	3300	3400	3700	3800	3800
	Compressor Data	RLA	9.0	13.4	14.1	16.6	17.9	21.8	26.2
		LRA	48.0	58.3	73.0	79.0	112.0	117.0	134.0
Refrigerant suction line O.D. Note: Liquid line is 3/8" O.D. for entire length		0-24 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
		25-39 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8" (3)
		40-75 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8" (3)
Approximate Weight (lbs.)		Net	166	171	176	181	247	280	290
		Ship	175	180	185	190	260	295	305
Sound Rating db (5)			73	73	73	73	79	79	79

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 7/8" to 1-1/8" reducer from line to unit.

(4) Additional charge for line sets above 15 feet.

Values based on suction line as follows with 3/8" liquid line.

a) 3/4" = 0.6 oz. per additional foot.

b) 7/8" = 0.7 oz. per additional foot.

c) 1 1/8" = 0.8 oz. per additional foot.

5) Tested in compliance with AHRI 270-2008 but not listed with AHRI.

SYSTEM COOLING CAPACITIES

13 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number MSH4BD	Indoor Unit Model Number C6B(A,H)-	Cooling Capacity Btuh	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM
024K	X24(C,U)-A + MB6BM	23,800	13	12.5	23,800	8.0	750
024K	X24(C,U)-B + MB6BM	23,800	13	12.5	23,800	8.0	750
030K	X30(C,U)-A + MB6BM	28,400	13	12.0	29,400	7.8	800
030K	X30(C,U)-B + MB6BM	28,400	13	12.0	29,400	7.8	800
036K	X35(C,U)-B + MB6BM	35,600	13	12.0	36,000	8.0	1100
036K	X36(C,U)-A + MB6BM	35,600	13	12.0	36,000	8.0	1100
036K	X36(C,U)-B + MB6BM	35,600	13	12.0	36,000	8.0	1100
042K	X42(C,U)-B + MB6BM	42,000	13	13.0	42,000	8.0	1325
042K	X42(C,U)-C + MB6BM	42,000	13	13.0	42,000	8.0	1325
048K	X48(C,U)-C + MB6BM	48,000	13	11.7	47,000	8.0	1675
060K	X60(C,U)-C + MB6EM	57,000	13	12.0	55,000	8.0	1850

Outdoor Unit Model Number MSH4BD-	Indoor Unit + TDR	BTUH	SEER	EER	Heat Capacity BTUH @ 47 F	Heating Capacity BTUH @ 17 F	HSPF	SCFM
018K	GB5BMM024K-A	17,400	13.00	11.00	20,000	10,800	8.00	650
018K	GB5BMM024K-B	17,500	13.00	11.00	17,700	10,500	7.70	650
024K	GB5BMM024K-A	23,400	13.00	11.00	25,200	15,200	8.00	855
024K	GB5BMM024K-B	23,000	13.00	11.00	26,000	15,000	8.00	820
030K	GB5BMM030K-A	28,400	13.00	11.00	32,800	20,200	8.00	1125
030K	GB5BMM030K-B	28,400	13.00	11.00	32,200	19,200	8.00	1080
036K	GB5BMM036K-B	35,000	13.00	11.00	36,800	22,000	8.00	1170
042K	GB5BMM042K-B	40,000	13.00	11.00	41,600	25,600	7.90	1530
048K	GB5BMM048K-B	46,500	13.00	11.00	49,800	30,200	8.00	1360
048K	GB5BMM048K-C	47,500	13.00	11.00	47,500	30,000	8.00	1620
060K	GB5BMM060K-C	57,000	13.00	11.00	60,500	36,000	8.00	1665

Outdoor Unit Model Number MSH4BD	Indoor Unit Model Number GB5BM-O, B5BM-X	Cooling Capacity Btuh	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM
018K	24K-(A,B)	18,000	13.0	11.05	18,000	7.7	625
024K	24K-(A,B)	23,600	13.0	12.6	23,600	8.0	750
030K	30K-(A,B)	29,400	13.0	12.0	30,000	8.0	850
036K	36K-B	35,400	13.0	11.8	36,000	8.0	1200
042K	42K-B	39,600	13.0	11.7	41,000	8.0	1400
048K	48K-C	48,000	13.0	12.0	48,000	8.0	1600
060K	60K-C	59,500	13.5	11.7	58,000	8.0	1750

Outdoor Unit Model Number MSH4BD	Indoor TXV Coil + TDR	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47F	HSPF	Nominal SCFM
018K	C6B(A,H)-X24(C,U)-(A,B)	18,000	13	12.5	18,200	8.0	585
024K	C6B(A,H)-X24(C,U)-(A,B)	24,000	13	11.6	23,600	8.0	750
030K	C6B(A,H)-X30(C,U)-(A,B,C)	28,000	13	11.6	29,000	8.0	1000
036K	C6B(A,H)-X35(C,U)-B	35,600	13	12	36,000	8.0	1100
036K	C6B(A,H)-X36(C,U)-(B,C)	35,600	13	12	36,000	8.0	1100
042K	C6B(A,H)-X42(C,U)-(B,C)	42,000	13	12.95	42,000	8.0	1325
048K	C6B(A,H)-X47(C,U)-(B,C)	47,500	13	11.75	46,500	8.0	1675
048K	C6B(A,H)-X48(C,U)-(C,D)	47,500	13	11.75	46,500	8.0	1675

See current AHRI Directory for certified combinations and ratings.
www.ahridirectory.org

SYSTEM COOLING CAPACITIES (Continued)

14 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number MSH4BD	Indoor Unit Model Number B4VM-	Cooling Capacity Btuh	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM	Indoor Orifice
018K	(X)24K-B	18,400	14	12.9	18,000	8.0	600	0.050
024K	(X)24K-B	24,000	14	13.4	23,200	8.5	750	0.055
030K	(X)30K-B	29,600	14	12.9	29,600	8.5	900	0.065
036K	(X)36K-B	35,800	14	12.6	37,800	8.5	1180	0.073
042K	(X)48K-C	41,500	14	13.5	41,500	8.5	1400	0.077
048K	(X)48K-C	48,500	14	13.0	47,500	8.5	1600	0.080
060K	(X)60K-C	59,500	13.5	12	57,500	8.5	1700	0.089

See current AHRI Directory for certified combinations and ratings.

www.ahridirectory.org

ACCESSORIES - CONDENSING UNIT

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Outdoor Thermostat - 913852

Two stage logic provides ability to lock out electric strips down to balance point and bring on in stages.

Snow Stand Kit - 920636

Extreme Wind Condition Mounting Kit - 920900

Fan Delay Kit (TDR) - 918476

13 SEER + LOOSE COIL COOLING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) - LOOSE COIL

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	18.8	16.6	1.33	17.9	16.3	1.47	17.0	16.0	1.62	15.9	15.5	1.78	14.9	14.9	1.96
	80	67	20.5	14.1	1.33	19.5	13.7	1.47	18.5	13.2	1.62	17.4	12.7	1.78	16.1	12.2	1.96
	80	72	22.6	11.3	1.33	21.5	10.9	1.47	20.4	10.5	1.62	19.1	10.0	1.79	17.7	9.6	1.97
	75	63	19.0	13.6	1.34	18.2	13.2	1.47	17.2	12.7	1.62	16.1	12.3	1.78	14.9	11.7	1.96
600	80	62	19.3	17.9	1.36	18.4	17.6	1.50	17.4	17.3	1.64	16.4	16.4	1.80	15.4	15.4	1.99
	80	67	20.9	15.0	1.36	19.9	14.6	1.50	18.9	14.1	1.65	17.7	13.6	1.81	16.3	13.1	1.99
	80	72	23.0	11.9	1.36	21.9	11.5	1.50	20.7	11.1	1.65	19.3	10.6	1.82	17.9	10.1	2.00
	75	63	19.5	14.5	1.36	18.5	14.0	1.50	17.5	13.6	1.64	16.4	13.1	1.81	15.2	12.5	1.99
675	80	62	19.6	19.1	1.39	18.8	18.7	1.52	17.9	17.9	1.67	17.0	17.0	1.84	15.9	15.9	2.01
	80	67	21.3	15.9	1.39	20.2	15.4	1.52	19.1	15.0	1.67	17.9	14.5	1.84	16.5	13.9	2.02
	80	72	23.3	12.5	1.38	22.1	12.1	1.53	20.9	11.7	1.68	19.4	11.2	1.85	18.0	10.7	2.03
	75	63	19.8	15.3	1.39	18.8	14.9	1.53	17.8	14.4	1.68	16.6	13.9	1.84	15.4	13.3	2.02

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) (LOOSE COIL)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	23.9	21.4	1.60	22.8	21.0	1.77	21.6	20.5	1.96	20.4	19.8	2.17	19.0	19.0	2.41
	80	67	25.9	18.0	1.60	24.7	17.5	1.78	23.4	16.9	1.97	22.0	16.3	2.18	20.4	15.6	2.41
	80	72	28.3	14.4	1.60	27.0	14.0	1.78	25.5	13.5	1.97	23.9	12.9	2.19	22.0	12.2	2.42
	75	63	24.1	17.4	1.60	23.0	16.9	1.78	21.8	16.3	1.97	20.5	15.7	2.18	19.0	15.0	2.41
800	80	62	24.4	22.9	1.63	23.3	22.4	1.81	22.2	22.0	2.00	21.0	21.0	2.21	19.6	19.6	2.44
	80	67	26.3	19.1	1.63	25.1	18.6	1.81	23.8	18.0	2.00	22.3	17.4	2.22	20.6	16.7	2.45
	80	72	28.7	15.2	1.64	27.2	14.7	1.82	25.7	14.2	2.01	24.0	13.5	2.23	22.3	12.9	2.46
	75	63	24.6	18.5	1.64	23.4	17.9	1.81	22.2	17.4	2.00	20.8	16.7	2.21	19.3	16.0	2.45
900	80	62	25.0	24.4	1.67	23.9	23.7	1.85	22.8	22.7	2.04	21.5	21.5	2.25	20.1	20.1	2.48
	80	67	26.8	20.2	1.67	25.5	19.7	1.85	24.1	19.1	2.04	22.5	18.4	2.25	20.8	17.7	2.49
	80	72	28.9	15.9	1.67	27.5	15.4	1.86	26.0	14.8	2.05	24.3	14.2	2.26	22.5	13.5	2.50
	75	63	24.9	19.5	1.67	23.8	19.0	1.85	22.5	18.4	2.04	21.0	17.7	2.25	19.4	17.0	2.48

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) (LOOSE COIL)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
800	80	62	28.7	24.9	1.95	27.5	24.5	2.15	26.2	24.0	2.36	24.7	23.2	2.61	23.0	22.4	2.89
	80	67	31.1	21.1	1.96	29.8	20.5	2.16	28.3	19.8	2.37	26.6	19.1	2.62	24.7	18.3	2.89
	80	72	33.9	17.1	1.97	32.4	16.5	2.17	30.7	15.9	2.38	28.8	15.3	2.63	26.8	14.5	2.90
	75	63	29.0	20.4	1.96	27.8	19.9	2.15	26.4	19.2	2.37	24.8	18.5	2.61	23.1	17.7	2.89
1000	80	62	29.9	27.9	2.03	28.6	27.3	2.22	27.2	26.8	2.44	25.7	25.6	2.68	24.1	24.0	2.96
	80	67	32.1	23.3	2.04	30.7	22.7	2.23	29.1	22.0	2.45	27.3	21.2	2.69	25.3	20.4	2.97
	80	72	34.6	18.5	2.04	33.1	17.9	2.24	31.4	17.3	2.46	29.5	16.6	2.70	27.2	15.8	2.98
	75	63	29.9	22.5	2.03	28.6	21.9	2.23	27.2	21.2	2.44	25.5	20.4	2.69	23.6	19.6	2.97
1200	80	62	30.8	30.3	2.11	29.6	29.4	2.30	28.2	28.2	2.52	26.7	26.7	2.76	24.9	24.9	3.04
	80	67	32.7	25.4	2.11	31.3	24.8	2.31	29.6	24.0	2.53	27.7	23.2	2.77	25.7	22.3	3.04
	80	72	35.1	19.8	2.12	33.6	19.2	2.32	31.8	18.6	2.54	29.8	17.8	2.78	27.6	17.0	3.06
	75	63	30.5	24.4	2.11	29.2	23.8	2.31	27.6	23.1	2.52	25.9	22.2	2.76	24.0	21.3	3.04

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) (LOOSE COIL)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	36.0	31.9	2.42	34.5	31.3	2.66	32.7	30.6	2.93	30.8	29.5	3.23	28.6	28.4	3.58
	80	67	39.1	26.9	2.44	37.3	26.1	2.68	35.3	25.3	2.95	33.1	24.3	3.25	30.6	23.3	3.60
	80	72	42.5	21.7	2.46	40.5	21.0	2.70	38.2	20.2	2.97	35.8	19.3	3.27	33.1	18.3	3.61
	75	63	36.4	26.0	2.43	34.8	25.3	2.67	32.9	24.4	2.94	30.9	23.5	3.24	28.6	22.4	3.59
1200	80	62	36.9	34.1	2.48	35.3	33.4	2.72	33.5	32.8	2.99	31.5	31.4	3.29	29.5	29.4	3.64
	80	67	39.7	28.5	2.50	37.9	27.8	2.74	35.9	26.9	3.01	33.6	25.9	3.31	31.0	24.8	3.65
	80	72	43.0	22.8	2.52	41.0	22.1	2.76	38.8	21.2	3.03	36.2	20.3	3.33	33.5	19.3	3.67
	75	63	37.1	27.6	2.49	35.4	26.8	2.73	33.5	25.9	3.00	31.4	25.0	3.30	29.0	23.9	3.64
1350	80	62	37.7	36.2	2.54	36.1	35.3	2.78	34.2	34.2	3.05	32.3	32.3	3.35	30.2	30.2	3.71
	80	67	40.3	30.2	2.56	38.4	29.4	2.80	36.3	28.5	3.07	34.0	27.5	3.37	31.4	26.3	3.71
	80	72	43.5	23.8	2.58	41.5	23.1	2.82	39.1	22.2	3.09	36.6	21.3	3.39	33.7	20.2	3.73
	75	63	37.6	29.1	2.55	35.9	28.3	2.79	33.9	27.4	3.05	31.7	26.4	3.36	29.2	25.2	3.70

13 SEER + LOOSE COIL COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) (LOOSE COIL)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	43.4	38.0	2.71	41.5	37.2	2.97	39.2	36.4	3.26	36.7	35.1	3.59	34.1	33.8	3.97
	80	67	46.9	32.0	2.71	44.8	31.1	2.98	42.3	30.0	3.27	39.5	28.8	3.59	36.5	27.6	3.97
	80	72	51.1	25.9	2.72	48.7	25.0	2.98	45.9	24.0	3.27	42.7	22.9	3.60	39.3	21.6	3.97
	75	63	43.8	31.1	2.71	41.8	30.2	2.98	39.5	29.1	3.27	36.9	27.9	3.60	34.2	26.6	3.97
1400	80	62	44.5	40.7	2.77	42.3	39.8	3.04	40.1	39.1	3.33	37.6	37.5	3.66	35.0	35.0	4.03
	80	67	47.8	34.0	2.78	45.5	33.0	3.04	43.0	32.0	3.33	40.2	30.8	3.66	37.0	29.4	4.03
	80	72	51.7	27.2	2.79	49.1	26.3	3.05	46.3	25.2	3.34	43.2	24.0	3.66	39.8	22.8	4.04
	75	63	44.7	32.9	2.78	42.5	32.0	3.04	40.2	30.9	3.33	37.5	29.7	3.66	34.6	28.3	4.03
1575	80	62	45.3	43.2	2.84	43.3	42.3	3.10	40.9	40.9	3.39	38.5	38.5	3.72	35.9	35.9	4.09
	80	67	48.5	35.9	2.85	46.2	34.9	3.11	43.6	33.8	3.40	40.5	32.5	3.72	37.3	31.1	4.09
	80	72	52.2	28.4	2.85	49.7	27.4	3.11	46.8	26.4	3.41	43.6	25.2	3.73	40.1	23.9	4.10
	75	63	45.3	34.7	2.85	43.2	33.7	3.11	40.7	32.6	3.40	38.0	31.3	3.73	34.9	29.9	4.10

MSH4BD048K with C6B(AH)-X48(C,U)-(C,D) (LOOSE COIL)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	43.1	32.6	3.11	41.5	31.9	3.44	39.8	31.3	3.83	37.8	30.3	4.27	35.6	29.4	4.80
	80	67	47.4	28.5	3.13	45.6	27.7	3.46	43.7	26.8	3.84	41.5	25.8	4.28	39.0	24.7	4.80
	80	72	52.1	24.2	3.15	50.2	23.4	3.48	48.0	22.5	3.86	45.7	21.6	4.30	43.0	20.5	4.82
	75	63	44.1	27.9	3.12	42.4	27.1	3.45	40.6	26.2	3.83	38.5	25.2	4.28	36.2	24.1	4.80
1600	80	62	45.7	36.3	3.20	44.0	35.6	3.53	42.0	35.2	3.91	39.8	34.1	4.35	37.4	32.9	4.87
	80	67	49.7	31.4	3.22	47.7	30.5	3.54	45.6	29.5	3.92	43.2	28.5	4.37	40.6	27.3	4.88
	80	72	54.8	26.1	3.24	52.7	25.2	3.57	50.3	24.3	3.95	47.7	23.3	4.39	44.7	22.2	4.90
	75	63	46.3	30.6	3.20	44.6	29.7	3.53	42.6	28.8	3.91	40.3	27.7	4.36	37.9	26.5	4.88
1800	80	62	47.6	40.0	3.28	45.7	39.4	3.61	43.6	38.6	3.99	41.3	37.4	4.43	38.7	36.1	4.95
	80	67	51.5	34.0	3.30	49.4	33.0	3.63	47.1	32.0	4.01	44.6	30.8	4.45	41.8	29.6	4.96
	80	72	56.6	27.8	3.32	54.3	26.9	3.65	51.7	25.9	4.03	48.8	24.9	4.47	45.5	23.8	4.97
	75	63	48.1	33.0	3.29	46.2	32.1	3.62	44.0	31.1	4.00	41.6	29.8	4.44	39.0	28.6	4.95

13 SEER + AHU COOLING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(*)-(A,B)

MSH4BD018K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	19.1	16.9	1.21	18.2	16.6	1.34	17.2	16.2	1.49	16.2	15.7	1.65	15.2	15.2	1.82
	80	67	20.8	14.3	1.20	19.8	13.9	1.34	18.8	13.4	1.49	17.7	12.9	1.66	16.4	12.4	1.84
	80	72	22.9	11.4	1.21	21.8	11.1	1.35	20.6	10.6	1.50	19.4	10.2	1.66	18.0	9.7	1.84
	75	63	19.3	13.8	1.21	18.4	13.4	1.34	17.5	13.0	1.49	16.4	12.5	1.65	15.2	12.0	1.84
600	80	62	19.5	18.1	1.26	18.6	17.8	1.39	17.6	17.5	1.54	16.7	16.7	1.68	15.7	15.7	1.86
	80	67	21.2	15.1	1.25	20.2	14.7	1.39	19.1	14.3	1.54	17.9	13.8	1.71	16.6	13.2	1.89
	80	72	23.2	12.0	1.25	22.1	11.6	1.39	20.9	11.2	1.55	19.5	10.7	1.71	18.1	10.3	1.90
	75	63	19.7	14.6	1.26	18.7	14.2	1.39	17.7	13.8	1.54	16.6	13.3	1.70	15.4	12.7	1.89
675	80	62	19.7	19.2	1.32	19.0	18.9	1.42	18.1	18.1	1.57	17.2	17.2	1.73	16.1	16.1	1.91
	80	67	21.4	16.0	1.32	20.3	15.5	1.45	19.2	15.1	1.61	18.0	14.5	1.77	16.6	14.0	1.95
	80	72	23.4	12.6	1.31	22.3	12.1	1.45	21.0	11.7	1.61	19.5	11.2	1.78	18.1	10.7	1.96
	75	63	19.9	15.4	1.32	18.9	15.0	1.46	17.9	14.5	1.61	16.7	14.0	1.77	15.5	13.4	1.95

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(*)-(A,B)

MSH4BD024K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	24.2	21.6	1.52	23.1	21.2	1.70	21.9	20.8	1.89	20.6	20.1	2.10	19.4	19.4	2.30
	80	67	26.1	18.2	1.52	25.0	17.6	1.70	23.7	17.1	1.89	22.2	16.5	2.10	20.6	15.8	2.33
	80	72	28.6	14.6	1.52	27.3	14.1	1.70	25.8	13.6	1.90	24.1	13.0	2.11	22.3	12.4	2.34
	75	63	24.4	17.6	1.52	23.3	17.1	1.70	22.1	16.5	1.89	20.8	15.9	2.10	19.3	15.3	2.33
800	80	62	24.5	23.0	1.61	23.4	22.5	1.78	22.3	22.1	1.97	21.2	21.2	2.14	19.9	19.9	2.37
	80	67	26.4	19.2	1.60	25.2	18.7	1.78	23.9	18.1	1.97	22.4	17.5	2.19	20.7	16.8	2.42
	80	72	28.8	15.3	1.61	27.3	14.8	1.79	25.8	14.2	1.98	24.2	13.6	2.19	22.4	12.9	2.43
	75	63	24.7	18.5	1.61	23.5	18.0	1.78	22.3	17.4	1.97	20.9	16.8	2.18	19.4	16.1	2.42
900	80	62	24.8	24.2	1.71	23.9	23.7	1.83	22.8	22.8	2.02	21.6	21.6	2.23	20.2	20.2	2.46
	80	67	26.6	20.1	1.71	25.3	19.6	1.89	23.9	19.0	2.08	22.4	18.3	2.29	20.7	17.6	2.52
	80	72	28.7	15.8	1.71	27.4	15.3	1.89	25.9	14.7	2.09	24.2	14.1	2.30	22.3	13.4	2.53
	75	63	24.8	19.4	1.71	23.6	18.9	1.89	22.3	18.3	2.08	20.9	17.6	2.29	19.3	16.8	2.52

13 SEER + AHU COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + MB6B(*)-(A,B,C)

MSH4BD030K with PAH2BMX30K(A,B), or B5BM-X30K-(A,B), or GB5BM-030K-(A,B)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
875	80	62	29.0	25.9	2.03	27.8	25.4	2.23	26.4	24.9	2.44	24.9	24.0	2.69	23.2	23.1	2.96
	80	67	31.4	21.8	2.04	30.0	21.2	2.24	28.5	20.6	2.45	26.8	19.8	2.69	24.8	19.0	2.97
	80	72	34.0	17.6	2.04	32.5	17.0	2.25	30.8	16.4	2.46	28.9	15.7	2.70	26.8	14.9	2.98
	75	63	29.2	21.1	2.04	28.0	20.5	2.23	26.6	19.9	2.45	25.0	19.1	2.69	23.1	18.3	2.97
1000	80	62	29.3	27.3	2.21	28.0	26.7	2.40	26.6	26.3	2.62	25.3	25.3	2.78	23.7	23.7	3.05
	80	67	31.5	22.8	2.21	30.1	22.2	2.41	28.5	21.6	2.62	26.7	20.8	2.87	24.7	19.9	3.14
	80	72	34.0	18.2	2.22	32.5	17.6	2.42	30.8	17.0	2.63	28.8	16.2	2.88	26.6	15.4	3.15
	75	63	29.3	22.0	2.21	28.0	21.4	2.41	26.6	20.7	2.62	24.9	20.0	2.86	23.0	19.1	3.14
1125	80	62	29.3	28.4	2.43	28.0	27.8	2.62	27.0	27.0	2.72	25.6	25.5	2.97	23.8	23.8	3.24
	80	67	31.4	23.7	2.43	29.9	23.1	2.63	28.3	22.4	2.84	26.5	21.6	3.08	24.4	20.6	3.36
	80	72	33.8	18.7	2.44	32.3	18.1	2.64	30.5	17.4	2.85	28.5	16.7	3.09	26.3	15.8	3.37
	75	63	29.1	22.8	2.43	27.9	22.2	2.63	26.3	21.4	2.84	24.6	20.6	3.08	22.7	19.7	3.36

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + MB6B(*)-(B,C)

MSH4BD036K with PAH2BMX36K(B,C), or B5BM-X36K-B, or GB5BM-036K-B

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	36.2	32.0	2.38	34.6	31.4	2.62	32.9	30.7	2.89	30.9	29.7	3.19	28.8	28.5	3.54
	80	67	39.2	27.0	2.40	37.4	26.2	2.64	35.5	25.4	2.90	33.3	24.4	3.21	30.8	23.4	3.55
	80	72	42.6	21.8	2.42	40.7	21.1	2.66	38.3	20.3	2.92	36.0	19.4	3.23	33.3	18.4	3.57
	75	63	36.5	26.1	2.38	34.9	25.4	2.63	33.1	24.5	2.89	31.0	23.6	3.20	28.7	22.6	3.54
1200	80	62	36.7	33.9	2.54	35.1	33.2	2.78	33.3	32.6	3.05	31.5	31.5	3.28	29.5	29.5	3.63
	80	67	39.5	28.4	2.56	37.7	27.6	2.80	35.7	26.8	3.07	33.4	25.8	3.36	30.8	24.7	3.71
	80	72	42.8	22.7	2.58	40.8	22.0	2.82	38.6	21.1	3.09	36.0	20.2	3.38	33.3	19.2	3.73
	75	63	36.9	27.5	2.55	35.2	26.7	2.79	33.3	25.8	3.05	31.2	24.8	3.36	28.8	23.7	3.70
1350	80	62	37.0	35.5	2.75	35.4	34.6	2.99	33.8	33.8	3.15	31.9	31.9	3.46	29.8	29.8	3.81
	80	67	39.6	29.6	2.76	37.8	28.8	3.00	35.6	27.9	3.27	33.3	26.9	3.57	30.7	25.8	3.91
	80	72	42.8	23.5	2.78	40.8	22.7	3.02	38.5	21.8	3.29	35.9	20.9	3.59	33.0	19.8	3.93
	75	63	36.9	28.6	2.75	35.2	27.7	2.99	33.2	26.8	3.26	31.0	25.8	3.56	28.6	24.6	3.90

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + MB6B(*)-(B,C)

MSH4BD042K with PAH2BMX42KB, or B5BM-X42K-B, or GB5BM-042K-B

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	43.6	38.2	2.63	41.7	37.5	2.89	39.5	36.7	3.18	37.0	35.3	3.51	34.4	34.0	3.89
	80	67	47.2	32.2	2.63	45.0	31.3	2.90	42.6	30.2	3.19	39.8	29.0	3.51	36.8	27.8	3.89
	80	72	51.4	26.0	2.64	49.0	25.1	2.90	46.2	24.2	3.19	43.0	23.1	3.52	39.6	21.8	3.89
	75	63	44.1	31.3	2.63	42.1	30.4	2.90	39.8	29.3	3.19	37.2	28.1	3.52	34.4	26.8	3.89
1400	80	62	44.4	40.6	2.81	42.2	39.7	3.06	40.0	39.0	3.36	37.5	37.4	3.69	35.1	35.1	4.00
	80	67	47.7	34.0	2.81	45.4	33.0	3.07	42.9	31.9	3.36	40.1	30.7	3.69	36.9	29.3	4.06
	80	72	51.6	27.2	2.81	49.0	26.2	3.07	46.3	25.2	3.36	43.1	24.0	3.69	39.7	22.7	4.06
	75	63	44.6	32.9	2.81	42.4	31.9	3.07	40.1	30.8	3.36	37.5	29.6	3.69	34.5	28.2	4.06
1575	80	62	44.7	42.7	3.02	42.7	41.7	3.28	40.5	40.5	3.50	38.2	38.2	3.83	35.5	35.5	4.20
	80	67	47.9	35.5	3.03	45.6	34.5	3.29	42.9	33.3	3.58	39.9	32.0	3.90	36.7	30.6	4.27
	80	72	51.6	28.1	3.03	49.1	27.1	3.29	46.2	26.0	3.58	43.0	24.8	3.91	39.5	23.5	4.27
	75	63	44.7	34.2	3.03	42.6	33.2	3.29	40.1	32.1	3.58	37.3	30.8	3.91	34.3	29.4	4.28

MSH4BD048K with C6B(A,H)-X48(C,U)-C + MB6B(*)-C

MSH4BD048K with PAH2BMX48KC, or B5BM-X48K-C, or GB5BM-048K-C

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	49.7	43.5	3.23	47.6	42.7	3.55	45.3	41.9	3.92	42.7	40.5	4.35	39.8	39.1	4.83
	80	67	53.7	36.7	3.25	51.4	35.7	3.57	48.8	34.5	3.94	45.9	33.3	4.36	42.6	31.9	4.84
	80	72	58.5	29.7	3.27	55.9	28.8	3.59	52.7	27.7	3.95	49.4	26.5	4.38	45.9	25.1	4.85
	75	63	50.1	35.6	3.24	48.0	34.6	3.56	45.6	33.5	3.93	42.9	32.2	4.35	39.9	30.8	4.84
1600	80	62	50.6	46.3	3.41	48.4	45.4	3.73	46.0	44.7	4.10	43.3	42.9	4.52	40.6	40.5	4.96
	80	67	54.3	38.7	3.43	52.0	37.6	3.75	49.2	36.5	4.11	46.2	35.1	4.53	42.8	33.7	5.01
	80	72	58.6	31.0	3.45	56.0	30.0	3.77	53.0	28.8	4.13	49.7	27.6	4.55	46.0	26.2	5.02
	75	63	50.8	37.4	3.41	48.5	36.4	3.73	46.0	35.2	4.10	43.2	33.9	4.53	40.0	32.4	5.01
1800	80	62	51.0	48.7	3.63	48.8	47.7	3.95	46.5	46.5	4.26	44.0	44.0	4.68	41.3	41.2	5.17
	80	67	54.7	40.5	3.65	52.2	39.4	3.97	49.4	38.1	4.33	46.2	36.8	4.75	42.7	35.2	5.23
	80	72	58.8	32.0	3.67	56.2	31.0	3.98	53.1	29.8	4.35	49.7	28.5	4.76	46.0	27.1	5.24
	75	63	51.0	39.1	3.64	48.7	38.0	3.96	46.1	36.7	4.33	43.2	35.3	4.75	39.9	33.8	5.23

13 SEER + AHU COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD060K with PAH2BMX60KC, or B5BM-X60K-C, or GB5BM-060K-C

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1750	80	62	54.5	41.2	3.63	52.3	40.4	4.06	49.9	39.5	4.54	47.2	38.1	5.08	43.9	36.5	5.73
	80	67	59.9	36.1	3.66	57.3	34.9	4.09	54.6	33.8	4.57	51.6	32.5	5.11	47.7	30.9	5.77
	80	72	65.6	30.5	3.70	62.9	29.3	4.13	60.2	28.2	4.61	56.8	26.9	5.15	52.4	25.4	5.81
	75	63	55.8	35.3	3.64	53.6	34.2	4.06	51.0	33.0	4.54	48.1	31.7	5.09	44.5	30.2	5.73
2000	80	62	57.7	45.9	3.73	55.2	44.9	4.16	52.5	44.2	4.64	49.6	42.8	5.18	46.1	40.6	5.83
	80	67	62.7	39.7	3.76	59.9	38.5	4.19	57.0	37.2	4.67	53.6	35.8	5.21	49.4	34.1	5.87
	80	72	69.4	32.8	3.81	66.2	31.7	4.24	62.7	30.5	4.71	59.0	29.2	5.25	54.2	27.5	5.91
	75	63	58.6	38.8	3.74	56.0	37.6	4.17	53.3	36.3	4.64	50.2	34.8	5.18	46.3	33.1	5.83
2250	80	62	59.9	50.3	3.87	57.3	49.4	4.30	54.4	48.3	4.77	51.3	46.6	5.31	47.2	44.1	5.97
	80	67	64.7	42.8	3.90	61.8	41.5	4.32	58.7	40.1	4.80	55.2	38.7	5.35	50.8	36.8	6.01
	80	72	71.1	35.0	3.94	67.8	33.8	4.37	64.2	32.5	4.85	60.2	31.2	5.39	55.0	29.5	6.04
	75	63	60.6	41.7	3.87	57.9	40.4	4.30	54.9	39.0	4.77	51.7	37.5	5.32	47.6	35.7	5.97

MSH4BD018K with GB5BMM024K-(A,B)

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
500	80	62	17.7	14.0	1.06	16.9	13.9	1.19	16.0	13.9	1.32	15.1	13.6	1.47	14.19	13.95	1.64	13.42	13.19	1.82
	80	67	19.5	11.3	1.08	18.7	11.2	1.20	17.7	11.3	1.34	16.6	11.0	1.48	15.39	10.72	1.64	14.34	10.11	1.83
	80	72	21.6	8.8	1.10	20.7	8.8	1.23	19.7	8.9	1.36	18.7	8.7	1.51	17.45	8.50	1.67	16.05	8.60	1.85
	75	63	17.9	10.9	1.07	17.1	10.8	1.19	16.2	10.8	1.33	15.2	10.5	1.47	14.23	9.58	1.64	13.24	10.33	1.82
650	80	62	18.8	16.4	1.11	18.0	16.6	1.24	17.2	16.1	1.38	16.3	15.4	1.52	15.31	14.79	1.69	14.39	14.27	1.87
	80	67	20.5	12.9	1.13	19.6	13.2	1.26	18.5	12.9	1.39	17.4	12.7	1.53	16.17	12.57	1.69	14.86	12.74	1.88
	80	72	22.6	9.8	1.16	21.6	10.2	1.28	20.6	9.9	1.42	19.4	9.8	1.56	18.13	9.84	1.72	16.61	9.79	1.90
	75	63	18.9	12.4	1.11	18.0	12.7	1.24	17.0	12.3	1.37	15.8	12.0	1.52	14.76	11.92	1.68	13.75	12.14	1.87
800	80	62	20.0	18.2	1.17	19.2	17.9	1.29	18.3	17.1	1.43	17.4	16.5	1.58	16.33	15.77	1.74	15.07	15.01	1.92
	80	67	21.1	14.5	1.18	20.1	14.7	1.30	19.1	14.3	1.44	18.0	14.6	1.58	16.70	14.47	1.74	15.14	14.32	1.92
	80	72	23.2	11.0	1.22	22.1	11.2	1.34	21.0	10.9	1.47	19.8	10.8	1.61	18.47	10.72	1.77	17.02	10.74	1.95
	75	63	19.5	13.9	1.16	18.5	14.0	1.29	17.6	14.0	1.42	16.4	13.9	1.57	15.11	13.62	1.73	14.03	13.59	1.91

MSH4BD024K with GB5BMM024K-(A,B)

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
650	80	62	23.6	18.0	1.36	22.8	18.2	1.52	21.7	18.3	1.68	20.4	17.9	1.86	18.96	18.58	2.06	17.80	17.44	2.29
	80	67	26.0	15.0	1.38	24.9	14.9	1.53	23.7	15.0	1.70	22.4	14.6	1.88	21.00	14.26	2.08	19.37	13.10	2.30
	80	72	28.8	11.7	1.42	27.7	11.6	1.57	26.5	11.9	1.74	25.1	11.6	1.91	23.59	11.37	2.11	21.93	11.59	2.33
	75	63	23.9	14.5	1.37	23.0	14.3	1.52	21.8	14.4	1.68	20.5	14.0	1.86	19.00	12.63	2.06	17.76	13.57	2.29
800	80	62	24.8	20.7	1.42	23.8	21.1	1.57	22.6	20.6	1.74	21.5	20.2	1.92	20.36	19.67	2.12	18.95	18.79	2.34
	80	67	27.0	16.5	1.45	25.9	16.9	1.60	24.6	16.5	1.76	23.3	16.2	1.94	21.80	16.12	2.14	20.16	15.96	2.36
	80	72	29.8	12.7	1.49	28.6	13.3	1.64	27.2	12.9	1.80	25.7	12.8	1.98	23.93	12.77	2.17	22.26	12.71	2.38
	75	63	24.9	15.9	1.42	23.9	16.3	1.57	22.7	15.8	1.74	21.4	15.5	1.92	19.84	15.29	2.11	18.18	15.01	2.34
950	80	62	25.7	23.2	1.48	24.8	23.1	1.63	23.8	22.2	1.80	22.7	21.5	1.98	21.39	20.67	2.18	20.00	19.91	2.41
	80	67	27.7	18.2	1.51	26.5	18.4	1.66	25.3	17.9	1.82	23.8	17.7	2.00	22.30	17.51	2.19	20.70	17.90	2.41
	80	72	30.3	14.0	1.55	28.9	14.2	1.70	27.5	13.8	1.86	26.1	13.7	2.03	24.46	13.57	2.23	22.74	13.61	2.44
	75	63	25.6	17.5	1.48	24.5	17.6	1.63	23.3	17.1	1.79	21.9	16.9	1.97	20.43	17.03	2.17	18.53	16.73	2.39

MSH4BD030K with GB5BMM030K-(A,B)

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
950	80	62	29.4	24.3	1.81	28.3	24.2	1.98	27.0	24.3	2.17	25.7	23.9	2.38	24.53	24.11	2.64	23.11	22.72	2.92
	80	67	32.2	19.2	1.86	30.9	19.1	2.04	29.5	19.3	2.22	28.0	18.9	2.43	26.42	18.63	2.67	24.64	17.63	2.95
	80	72	35.4	14.8	1.93	34.0	14.7	2.10	32.6	15.0	2.29	31.0	14.7	2.50	29.31	14.52	2.74	27.45	14.86	3.02
	75	63	29.7	18.6	1.82	28.5	18.4	1.98	27.2	18.6	2.17	25.8	18.1	2.39	24.15	16.47	2.63	22.39	17.81	2.91
1100	80	62	30.3	26.5	1.88	29.1	27.0	2.05	28.2	26.2	2.24	27.0	25.5	2.46	25.64	24.77	2.71	24.15	23.94	2.99
	80	67	32.9	20.6	1.94	31.5	21.2	2.10	30.1	20.7	2.29	28.6	20.5	2.49	26.95	20.48	2.73	25.11	20.41	3.01
	80	72	36.1	15.6	2.01	34.7	16.4	2.18	33.2	15.9	2.36	31.6	15.8	2.57	29.80	15.91	2.81	27.90	16.00	3.09
	75	63	30.4	19.9	1.88	29.2	20.4	2.05	27.8	19.9	2.24	26.3	19.6	2.45	24.67	19.48	2.69	22.95	19.95	2.97
1250	80	62	31.4	28.5	1.96	30.4	28.3	2.13	29.2	27.2	2.32	27.9	26.5	2.53	26.51	25.62	2.78	24.97	24.87	3.06
	80	67	33.4	22.3	2.00	32.1	22.5	2.17	30.6	22.0	2.35	29.0	22.0	2.56	27.32	21.81	2.80	25.52	22.67	3.08
	80	72	36.7	16.8	2.08	35.2	17.2	2.25	33.6	16.7	2.43	31.9	16.8	2.64	30.11	16.76	2.88	28.13	16.95	3.15
	75	63	30.9	21.4	1.95	29.6	21.6	2.11	28.3	21.1	2.30	26.7	20.9	2.51	25.11	21.48	2.75	23.29	21.44	3.03

13 SEER + AHU COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD036K with GB5BMM036K-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1000	80	62	35.4	27.2	2.23	34.0	26.9	2.46	32.4	27.0	2.71	30.6	26.4	2.99	28.71	27.66	3.30	26.68	25.71	3.66
	80	67	38.9	22.6	2.30	37.4	22.4	2.52	35.7	22.6	2.77	33.9	22.2	3.05	31.87	21.76	3.37	29.74	19.70	3.73
	80	72	42.8	17.6	2.38	41.2	17.5	2.61	39.4	17.8	2.86	37.5	17.5	3.15	35.39	17.17	3.47	33.13	17.56	3.84
	75	63	36.0	21.9	2.24	34.5	21.7	2.47	32.9	21.8	2.72	31.1	21.3	2.99	29.20	19.30	3.31	27.08	20.85	3.67
1150	80	62	36.4	29.2	2.30	34.8	29.7	2.52	33.2	29.0	2.77	31.4	28.5	3.05	29.54	28.10	3.37	27.60	27.37	3.73
	80	67	39.8	24.1	2.37	38.2	24.8	2.59	36.5	24.2	2.84	34.6	23.9	3.12	32.55	23.82	3.45	30.30	23.72	3.80
	80	72	43.8	18.5	2.46	42.1	19.4	2.69	40.2	18.8	2.94	38.2	18.6	3.22	36.02	18.74	3.55	33.65	18.82	3.91
	75	63	36.9	23.3	2.32	35.4	23.9	2.53	33.7	23.2	2.78	31.8	22.9	3.06	29.80	22.70	3.38	27.66	22.49	3.73
1300	80	62	37.1	31.4	2.37	35.6	31.5	2.59	33.9	30.7	2.84	32.2	30.2	3.12	30.35	29.32	3.44	28.59	28.47	3.81
	80	67	40.6	25.9	2.44	38.9	26.2	2.66	37.1	25.6	2.91	35.2	25.5	3.19	33.04	25.25	3.51	30.77	25.28	3.87
	80	72	44.5	19.8	2.53	42.7	20.3	2.76	40.8	19.7	3.01	38.7	19.7	3.29	36.35	19.65	3.61	33.99	19.85	3.98
	75	63	37.6	25.0	2.38	36.0	25.2	2.60	34.2	24.5	2.85	32.4	24.3	3.13	30.29	24.03	3.44	28.09	23.78	3.79

MSH4BD042K with GB5BMM042K-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	41.6	34.3	2.63	39.9	34.0	2.84	37.9	34.0	3.10	35.8	33.0	3.39	33.51	32.94	3.73	31.23	30.70	4.11
	80	67	45.7	28.3	2.67	43.9	28.1	2.89	41.8	28.3	3.15	39.5	27.7	3.44	36.99	27.23	3.77	34.20	24.97	4.14
	80	72	50.2	21.6	2.75	48.2	21.5	2.97	46.0	21.9	3.22	43.6	21.5	3.51	40.90	21.12	3.84	38.10	21.50	4.21
	75	63	42.2	27.3	2.63	40.5	27.0	2.85	38.4	27.2	3.10	36.2	26.5	3.40	33.59	23.63	3.73	30.76	25.58	4.10
1550	80	62	42.3	36.1	2.69	40.6	36.6	2.91	38.7	35.5	3.16	36.6	34.5	3.46	34.54	33.37	3.80	32.26	31.99	4.18
	80	67	46.4	29.7	2.75	44.5	30.5	2.97	42.3	29.7	3.21	40.0	29.4	3.50	37.42	29.25	3.84	34.61	28.86	4.21
	80	72	50.7	22.5	2.82	48.7	23.5	3.04	46.4	22.8	3.29	44.0	22.6	3.58	41.32	22.67	3.91	38.49	22.68	4.28
	75	63	42.9	28.6	2.70	41.0	29.3	2.91	39.0	28.5	3.17	36.7	28.0	3.46	34.03	27.53	3.79	31.02	27.01	4.16
1700	80	62	43.0	38.0	2.76	41.3	38.0	2.98	39.3	36.7	3.23	37.5	35.6	3.53	35.38	34.19	3.87	33.10	32.96	4.25
	80	67	46.9	31.5	2.82	44.9	31.9	3.03	42.7	31.1	3.28	40.3	30.9	3.57	37.76	30.38	3.90	34.88	30.27	4.28
	80	72	51.1	23.8	2.89	49.1	24.3	3.11	46.8	23.6	3.36	44.3	23.6	3.65	41.67	23.48	3.98	38.80	23.66	4.35
	75	63	43.4	30.3	2.77	41.5	30.5	2.99	39.4	29.7	3.23	37.0	29.2	3.52	34.43	28.73	3.86	31.40	28.32	4.23

MSH4BD048K with GB5BMM048K-(B,C)

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1200	80	62	47.7	34.8	2.95	45.8	34.4	3.23	43.7	34.5	3.54	41.2	33.5	3.89	38.32	34.94	4.29	35.92	32.75	4.76
	80	67	52.4	29.2	3.02	50.4	28.9	3.30	48.2	29.2	3.61	45.7	28.5	3.97	43.03	27.88	4.37	39.90	25.20	4.82
	80	72	58.0	23.1	3.14	55.8	23.0	3.42	53.5	23.4	3.73	50.9	22.9	4.08	48.04	22.46	4.48	44.92	22.95	4.93
	75	63	48.4	28.3	2.96	46.5	28.0	3.24	44.3	28.1	3.55	41.9	27.3	3.90	38.85	24.77	4.29	36.36	26.63	4.76
1350	80	62	48.9	36.9	3.02	47.0	37.6	3.30	44.7	36.4	3.62	42.2	35.8	3.97	39.30	35.33	4.36	36.57	34.88	4.82
	80	67	53.6	30.7	3.10	51.6	31.6	3.38	49.3	30.7	3.70	46.8	30.3	4.05	43.94	30.14	4.44	40.89	29.91	4.90
	80	72	59.2	24.0	3.22	57.0	25.2	3.50	54.5	24.4	3.82	51.8	24.2	4.17	48.84	24.29	4.57	45.59	24.36	5.02
	75	63	49.6	29.7	3.03	47.7	30.5	3.32	45.4	29.6	3.63	42.9	29.0	3.98	40.04	28.69	4.37	36.95	28.26	4.83
1500	80	62	49.9	39.2	3.10	47.9	39.4	3.38	45.6	38.4	3.69	43.1	37.9	4.04	40.26	37.24	4.44	37.17	36.56	4.89
	80	67	54.7	32.6	3.18	52.6	33.1	3.46	50.2	32.2	3.77	47.6	32.0	4.12	44.72	31.59	4.52	41.59	31.54	4.97
	80	72	60.2	25.6	3.30	57.8	26.2	3.58	55.3	25.4	3.90	52.5	25.4	4.25	49.34	25.24	4.64	45.91	25.47	5.09
	75	63	50.6	31.6	3.11	48.6	31.9	3.39	46.3	30.9	3.70	43.7	30.6	4.05	40.89	30.10	4.45	37.45	29.69	4.89

MSH4BD060K with GB5BMM060K-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1450	80	62	58.3	40.8	3.54	55.9	40.3	3.90	53.2	40.3	4.29	50.0	39.2	4.74	47.19	41.30	5.28	44.22	38.70	5.88
	80	67	64.2	34.5	3.67	61.7	34.1	4.02	58.9	34.4	4.43	55.9	33.5	4.89	52.57	32.80	5.40	48.85	29.84	5.97
	80	72	70.9	27.6	3.84	68.4	27.5	4.20	65.5	28.0	4.61	61.9	27.1	5.06	58.36	26.56	5.58	54.54	27.13	6.15
	75	63	59.3	33.6	3.56	56.9	33.1	3.92	54.2	33.2	4.31	51.0	32.2	4.77	47.89	29.38	5.29	44.84	31.59	5.89
1600	80	62	59.8	42.7	3.61	57.3	43.6	3.96	54.5	42.3	4.36	51.3	41.6	4.81	48.09	41.21	5.33	45.00	40.65	5.93
	80	67	65.7	35.9	3.74	63.1	37.0	4.10	60.3	35.8	4.50	57.2	35.3	4.96	53.74	35.15	5.48	49.96	34.88	6.04
	80	72	72.5	28.5	3.92	69.8	29.9	4.28	66.4	28.8	4.68	62.9	28.4	5.13	59.39	28.52	5.66	55.50	28.57	6.23
	75	63	60.7	34.9	3.63	58.2	35.8	3.98	55.4	34.6	4.38	52.4	33.9	4.84	48.70	33.45	5.34	45.58	33.24	5.94
1750	80	62	61.0	45.2	3.67	58.4	45.4	4.02	55.6	44.2	4.42	52.4	43.7	4.88	48.78	42.63	5.38	45.61	42.50	5.98
	80	67	67.0	37.9	3.81	64.3	38.3	4.17	61.4	37.2	4.57	58.2	37.0	5.03	54.74	36.54	5.54	51.00	36.53	6.11
	80	72	73.8	30.1	4.00	70.5	30.7	4.35	67.3	29.6	4.75	63.9	29.6	5.20	60.24	29.43	5.73	56.29	29.75	6.30
	75	63	61.9	36.8	3.69	59.4	37.1	4.04	56.5	35.9	4.44	53.3	35.5	4.90	49.78	34.80	5.40	46.26	34.65	5.98

13 SEER + VSB COOLING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + VSB

MSH4BD018K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	18.3	16.5	1.08	17.5	16.2	1.22	16.6	15.9	1.36	15.6	15.4	1.53	14.7	14.7	1.71
	80	67	19.9	13.9	1.08	19.0	13.5	1.22	18.0	13.1	1.37	16.9	12.6	1.53	15.7	12.2	1.72
	80	72	21.8	11.1	1.07	20.8	10.7	1.22	19.7	10.3	1.37	18.5	9.9	1.54	17.2	9.5	1.73
	75	63	18.5	13.5	1.08	17.7	13.1	1.22	16.8	12.7	1.37	15.7	12.2	1.53	14.6	11.7	1.72
600	80	62	18.7	17.8	1.10	17.9	17.4	1.24	17.1	17.1	1.37	16.2	16.2	1.54	15.2	15.2	1.73
	80	67	20.3	14.8	1.09	19.4	14.4	1.24	18.3	14.0	1.39	17.2	13.5	1.55	15.9	13.0	1.74
	80	72	22.2	11.7	1.10	21.2	11.3	1.24	20.0	10.9	1.39	18.7	10.5	1.56	17.3	10.0	1.75
	75	63	18.9	14.3	1.10	18.0	13.9	1.24	17.1	13.5	1.39	16.0	13.0	1.55	14.8	12.5	1.74
675	80	62	19.2	19.0	1.11	18.5	18.4	1.25	17.6	17.6	1.40	16.7	16.7	1.56	15.7	15.7	1.75
	80	67	20.6	15.7	1.12	19.6	15.3	1.26	18.6	14.9	1.42	17.4	14.4	1.58	16.1	13.9	1.77
	80	72	22.5	12.3	1.12	21.3	11.9	1.27	20.1	11.5	1.42	18.8	11.0	1.59	17.5	10.5	1.78
	75	63	19.2	15.1	1.12	18.3	14.7	1.26	17.3	14.3	1.41	16.2	13.8	1.58	15.0	13.3	1.77

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + VSB

MSH4BD024K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	23.2	21.2	1.36	22.2	20.8	1.54	21.0	20.4	1.73	19.8	19.7	1.94	18.7	18.7	2.16
	80	67	25.0	17.7	1.36	23.9	17.2	1.54	22.7	16.7	1.73	21.3	16.1	1.94	19.8	15.5	2.18
	80	72	27.3	14.1	1.35	26.0	13.7	1.54	24.6	13.2	1.74	23.1	12.7	1.95	21.3	12.1	2.19
	75	63	23.4	17.1	1.36	22.3	16.7	1.54	21.2	16.1	1.73	19.9	15.6	1.94	18.5	14.9	2.18
800	80	62	23.6	22.6	1.40	22.6	22.1	1.58	21.7	21.6	1.76	20.5	20.5	1.97	19.2	19.2	2.20
	80	67	25.4	18.8	1.40	24.2	18.3	1.58	22.9	17.8	1.78	21.5	17.2	1.99	20.0	16.5	2.23
	80	72	27.5	14.9	1.41	26.2	14.4	1.59	24.7	13.9	1.79	23.1	13.3	2.00	21.4	12.7	2.24
	75	63	23.7	18.2	1.40	22.6	17.7	1.58	21.4	17.1	1.77	20.1	16.5	1.99	18.7	15.9	2.23
900	80	62	24.2	23.9	1.44	23.3	23.1	1.61	22.2	22.2	1.80	20.9	20.9	2.01	19.6	19.6	2.25
	80	67	25.7	19.8	1.45	24.5	19.3	1.64	23.1	18.7	1.83	21.7	18.1	2.05	20.0	17.4	2.28
	80	72	27.6	15.5	1.45	26.2	15.0	1.65	24.8	14.5	1.84	23.3	13.9	2.06	21.6	13.2	2.30
	75	63	23.9	19.1	1.46	22.8	18.6	1.64	21.6	18.0	1.83	20.2	17.4	2.05	18.7	16.7	2.28

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + VSB

MSH4BD030K with PAH4VMX30K(A,B), or B4VM-X30K-(A,B)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
800	80	62	29.4	25.8	1.73	28.0	25.3	1.93	26.6	24.8	2.15	25.0	24.0	2.39	23.3	23.2	2.67
	80	67	31.7	21.7	1.74	30.3	21.1	1.94	28.7	20.4	2.15	26.9	19.7	2.40	24.9	18.9	2.68
	80	72	34.4	17.4	1.74	32.8	16.8	1.94	31.1	16.2	2.16	29.1	15.5	2.41	26.9	14.7	2.69
	75	63	29.6	21.1	1.73	28.3	20.5	1.93	26.8	19.8	2.15	25.2	19.1	2.39	23.3	18.3	2.67
1000	80	62	30.4	28.9	1.82	29.1	28.3	2.02	27.8	27.7	2.21	26.2	26.2	2.45	24.5	24.5	2.73
	80	67	32.5	24.0	1.82	31.1	23.4	2.02	29.4	22.8	2.24	27.5	22.0	2.49	25.4	21.2	2.77
	80	72	35.2	18.9	1.84	33.5	18.3	2.04	31.7	17.7	2.26	29.6	16.9	2.50	27.2	16.1	2.78
	75	63	30.5	23.3	1.82	29.1	22.7	2.02	27.5	22.0	2.24	25.8	21.2	2.48	23.8	20.4	2.76
1200	80	62	31.5	31.0	1.90	30.2	30.0	2.10	28.8	28.7	2.32	27.1	27.1	2.57	25.2	25.2	2.84
	80	67	33.0	26.2	1.95	31.4	25.5	2.15	29.7	24.8	2.37	27.7	24.0	2.61	25.5	23.1	2.89
	80	72	35.5	20.2	1.96	33.8	19.6	2.16	31.9	18.9	2.38	29.7	18.1	2.62	27.3	17.3	2.90
	75	63	30.9	25.3	1.95	29.4	24.6	2.14	27.8	23.9	2.36	26.0	23.0	2.61	23.9	22.1	2.89

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + VSB

MSH4BD036K with PAH4VMX36KB, or B4VM-X36K-B

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	34.9	31.5	2.28	33.5	31.0	2.51	31.9	30.4	2.78	30.0	29.3	3.07	28.1	28.1	3.39
	80	67	37.9	26.5	2.30	36.2	25.8	2.53	34.3	25.0	2.79	32.3	24.1	3.09	29.9	23.2	3.43
	80	72	41.0	21.2	2.32	39.2	20.6	2.55	37.0	19.8	2.81	34.9	19.0	3.11	32.3	18.1	3.45
	75	63	35.3	25.6	2.28	33.7	24.9	2.52	32.0	24.2	2.78	30.1	23.3	3.08	27.9	22.3	3.41
1200	80	62	35.5	33.5	2.39	34.1	32.8	2.63	32.4	32.2	2.89	30.9	30.9	3.08	28.9	28.9	3.47
	80	67	38.2	28.0	2.41	36.5	27.3	2.64	34.6	26.5	2.90	32.4	25.6	3.20	30.0	24.6	3.53
	80	72	41.2	22.2	2.44	39.5	21.5	2.66	37.4	20.8	2.93	35.0	19.9	3.22	32.4	18.9	3.55
	75	63	35.7	27.1	2.40	34.1	26.4	2.63	32.3	25.5	2.89	30.3	24.6	3.19	28.0	23.6	3.52
1350	80	62	36.1	35.1	2.53	34.5	34.3	2.77	33.2	33.2	2.95	31.4	31.3	3.25	29.3	29.3	3.59
	80	67	38.4	29.4	2.55	36.7	28.6	2.78	34.7	27.8	3.04	32.5	26.9	3.34	30.0	25.8	3.68
	80	72	41.5	23.1	2.57	39.6	22.4	2.81	37.4	21.6	3.06	35.0	20.7	3.36	32.3	19.7	3.69
	75	63	35.8	28.3	2.54	34.2	27.6	2.77	32.4	26.8	3.03	30.3	25.8	3.33	28.0	24.7	3.67

13 SEER + VSB COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + VSB

MSH4BD042K with PAH4VMX42K(B,C), or B4VM-X42K-(B,C)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	42.1	37.6	2.52	40.3	37.0	2.77	38.3	36.2	3.06	35.9	34.9	3.38	33.6	33.5	3.72
	80	67	45.5	31.6	2.53	43.5	30.7	2.78	41.2	29.8	3.07	38.6	28.7	3.39	35.7	27.5	3.75
	80	72	49.4	25.3	2.53	47.2	24.5	2.79	44.5	23.6	3.07	41.7	22.6	3.39	38.5	21.4	3.76
	75	63	42.6	30.7	2.52	40.7	29.8	2.78	38.5	28.8	3.06	36.1	27.8	3.39	33.4	26.6	3.75
1400	80	62	43.0	40.1	2.64	41.0	39.2	2.89	38.9	38.5	3.18	36.8	36.8	3.46	34.4	34.4	3.83
	80	67	46.1	33.5	2.65	44.0	32.6	2.90	41.6	31.6	3.18	38.9	30.5	3.50	35.9	29.2	3.87
	80	72	49.8	26.6	2.66	47.5	25.7	2.91	44.9	24.8	3.19	41.9	23.7	3.51	38.6	22.5	3.87
	75	63	43.1	32.4	2.64	41.2	31.5	2.90	38.9	30.5	3.18	36.4	29.4	3.50	33.6	28.1	3.87
1575	80	62	43.6	42.2	2.79	41.6	41.3	3.04	39.7	39.7	3.28	37.5	37.5	3.60	34.9	34.9	3.96
	80	67	46.4	35.2	2.79	44.3	34.2	3.05	41.8	33.2	3.33	39.0	32.0	3.65	35.9	30.7	4.02
	80	72	50.0	27.6	2.80	47.7	26.7	3.06	45.0	25.8	3.34	42.0	24.6	3.66	38.6	23.4	4.02
	75	63	43.4	33.9	2.79	41.4	33.0	3.05	39.1	32.0	3.33	36.5	30.8	3.65	33.6	29.5	4.02

MSH4BD048K with C6B(A,H)-X48(C,U)-(C,D) + VSB

MSH4BD048K with PAH4VMX48KC, or B4VM-X48K-C

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	43.7	33.1	2.82	42.2	32.5	3.14	40.4	31.9	3.52	38.5	30.9	3.95	36.4	30.0	4.47
	80	67	48.0	28.9	2.83	46.3	28.1	3.15	44.4	27.3	3.53	42.2	26.3	3.96	39.8	25.2	4.47
	80	72	52.7	24.5	2.85	50.8	23.7	3.17	48.7	22.8	3.54	46.4	21.9	3.97	43.8	20.9	4.47
	75	63	44.7	28.3	2.82	43.1	27.5	3.14	41.3	26.6	3.52	39.3	25.7	3.96	36.9	24.6	4.47
1600	80	62	46.4	37.0	2.87	44.7	36.3	3.20	42.8	36.0	3.57	40.6	34.9	4.01	38.3	33.7	4.52
	80	67	50.4	31.9	2.89	48.5	31.1	3.21	46.4	30.1	3.58	44.1	29.1	4.01	41.5	27.9	4.52
	80	72	55.5	26.4	2.91	53.4	25.6	3.23	51.1	24.7	3.60	48.5	23.7	4.02	45.6	22.7	4.52
	75	63	47.0	31.1	2.88	45.2	30.3	3.20	43.3	29.3	3.57	41.1	28.3	4.01	38.7	27.1	4.52
1800	80	62	48.3	40.7	2.95	46.4	40.2	3.27	44.4	39.4	3.65	42.1	38.3	4.08	39.6	37.0	4.59
	80	67	52.2	34.5	2.97	50.2	33.6	3.29	47.9	32.5	3.66	45.5	31.4	4.09	42.7	30.2	4.59
	80	72	57.3	28.1	2.99	55.0	27.3	3.30	52.5	26.4	3.67	49.7	25.4	4.10	46.5	24.2	4.59
	75	63	48.8	33.6	2.96	46.9	32.7	3.28	44.8	31.6	3.65	42.4	30.5	4.08	39.9	29.3	4.59

MSH4BD060K with C6B(A,H)-X60(C,U)-(C,D) + VSB

MSH4BD060K with PAH4VMX60KC, or B4VM-X60K-C

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1750	80	62	54.5	41.2	3.63	52.3	40.4	4.06	49.9	39.5	4.54	47.2	38.1	5.08	43.9	36.5	5.73
	80	67	59.9	36.1	3.66	57.3	34.9	4.09	54.6	33.8	4.57	51.6	32.5	5.11	47.7	30.9	5.77
	80	72	65.6	30.5	3.70	62.9	29.3	4.13	60.2	28.2	4.61	56.8	26.9	5.15	52.4	25.4	5.81
	75	63	55.8	35.3	3.64	53.6	34.2	4.06	51.0	33.0	4.54	48.1	31.7	5.09	44.5	30.2	5.73
2000	80	62	57.7	45.9	3.73	55.2	44.9	4.16	52.5	44.2	4.64	49.6	42.8	5.18	46.1	40.6	5.83
	80	67	62.7	39.7	3.76	59.9	38.5	4.19	57.0	37.2	4.67	53.6	35.8	5.21	49.4	34.1	5.87
	80	72	69.4	32.8	3.81	66.2	31.7	4.24	62.7	30.5	4.71	59.0	29.2	5.25	54.2	27.5	5.91
	75	63	58.6	38.8	3.74	56.0	37.6	4.17	53.3	36.3	4.64	50.2	34.8	5.18	46.3	33.1	5.83
2250	80	62	59.9	50.3	3.87	57.3	49.4	4.30	54.4	48.3	4.77	51.3	46.6	5.31	47.2	44.1	5.97
	80	67	64.7	42.8	3.90	61.8	41.5	4.32	58.7	40.1	4.80	55.2	38.7	5.35	50.8	36.8	6.01
	80	72	71.1	35.0	3.94	67.8	33.8	4.37	64.2	32.5	4.85	60.2	31.2	5.39	55.0	29.5	6.04
	75	63	60.6	41.7	3.87	57.9	40.4	4.30	54.9	39.0	4.77	51.7	37.5	5.32	47.6	35.7	5.97

13 SEER + LOOSE COIL HEATING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) - LOOSE COIL

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	10.0	2.18	1.34	11.8	2.54	1.36	12.5	2.69	1.37	15.0	3.18	1.39	17.6	3.66	1.41	19.4	3.98	1.43	20.1	4.12	1.43	22.7	4.56	1.46
	70	9.5	2.20	1.26	11.1	2.50	1.30	11.7	2.63	1.31	14.0	3.03	1.36	16.3	3.40	1.41	17.9	3.65	1.44	18.6	3.75	1.45	20.9	4.07	1.50
	80	8.9	2.16	1.20	10.3	2.43	1.24	10.9	2.53	1.26	12.9	2.88	1.32	15.0	3.19	1.38	16.4	3.39	1.42	17.0	3.48	1.44	19.1	3.74	1.49
600	60	10.0	2.12	1.39	11.8	2.48	1.40	12.6	2.63	1.41	15.2	3.12	1.43	17.8	3.60	1.45	19.6	3.93	1.46	20.4	4.07	1.47	23.0	4.52	1.49
	70	9.6	2.13	1.31	11.2	2.44	1.35	11.9	2.57	1.36	14.2	2.97	1.41	16.6	3.35	1.45	18.2	3.60	1.48	18.9	3.70	1.50	21.2	4.04	1.54
	80	9.0	2.12	1.24	10.5	2.38	1.29	11.1	2.49	1.31	13.2	2.83	1.37	15.3	3.14	1.43	16.8	3.34	1.47	17.4	3.42	1.49	19.5	3.68	1.55
700	60	10.2	2.09	1.43	12.0	2.44	1.45	12.8	2.59	1.45	15.4	3.09	1.47	18.0	3.57	1.48	19.9	3.90	1.49	20.6	4.04	1.50	23.3	4.50	1.51
	70	9.7	2.10	1.35	11.3	2.40	1.38	12.1	2.53	1.40	14.4	2.94	1.44	16.8	3.32	1.49	18.5	3.57	1.52	19.2	3.68	1.53	21.6	4.02	1.58
	80	9.1	2.08	1.29	10.6	2.34	1.33	11.2	2.44	1.35	13.3	2.77	1.41	15.5	3.07	1.48	16.9	3.27	1.52	17.6	3.35	1.54	19.7	3.60	1.60

13 SEER + LOOSE COIL HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
650	60	11.7	2.05	1.67	14.2	2.44	1.70	15.2	2.60	1.72	18.8	3.12	1.76	22.3	3.62	1.81	24.8	3.95	1.84	25.8	4.09	1.85	29.3	4.54	1.89
	70	11.2	1.99	1.64	13.5	2.33	1.69	14.4	2.48	1.71	17.7	2.93	1.78	21.0	3.35	1.84	23.3	3.62	1.89	24.3	3.73	1.91	27.6	4.10	1.97
	80	10.6	1.89	1.64	12.7	2.21	1.69	13.6	2.33	1.71	16.7	2.73	1.79	19.7	3.10	1.86	21.8	3.34	1.91	22.7	3.44	1.94	25.8	3.76	2.01
750	60	11.8	2.01	1.71	14.3	2.40	1.74	15.4	2.57	1.75	18.9	3.09	1.80	22.5	3.59	1.84	25.0	3.93	1.87	26.1	4.07	1.88	29.7	4.53	1.92
	70	11.3	1.95	1.69	13.6	2.30	1.73	14.6	2.44	1.75	17.9	2.90	1.82	21.3	3.32	1.88	23.6	3.60	1.92	24.6	3.72	1.94	27.9	4.09	2.00
	80	10.7	1.87	1.67	12.9	2.18	1.73	13.8	2.31	1.75	16.9	2.71	1.83	20.0	3.08	1.90	22.2	3.32	1.96	23.1	3.42	1.98	26.2	3.74	2.06
850	60	11.9	1.99	1.76	14.4	2.38	1.78	15.5	2.54	1.79	19.1	3.06	1.83	22.8	3.57	1.87	25.3	3.91	1.90	26.4	4.06	1.91	30.0	4.52	1.94
	70	11.4	1.93	1.73	13.7	2.28	1.77	14.8	2.42	1.79	18.1	2.88	1.85	21.5	3.31	1.91	23.9	3.59	1.95	24.9	3.71	1.97	28.3	4.08	2.03
	80	10.8	1.85	1.71	13.0	2.16	1.77	13.9	2.28	1.79	17.1	2.68	1.87	20.2	3.05	1.94	22.4	3.28	2.00	23.3	3.38	2.02	26.4	3.70	2.10

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
900	60	15.0	2.23	1.98	17.9	2.57	2.04	19.2	2.72	2.07	23.3	3.16	2.16	27.5	3.56	2.26	30.3	3.83	2.32	31.6	3.94	2.35	35.7	4.28	2.45
	70	14.4	2.12	2.00	17.1	2.42	2.08	18.3	2.55	2.11	22.2	2.93	2.23	26.2	3.28	2.34	28.9	3.50	2.42	30.1	3.59	2.46	34.0	3.88	2.57
	80	13.8	1.99	2.03	16.4	2.27	2.12	17.5	2.38	2.16	21.2	2.71	2.29	24.9	3.02	2.42	27.5	3.21	2.51	28.6	3.29	2.54	32.2	3.54	2.67
1000	60	15.1	2.20	2.01	18.0	2.55	2.08	19.3	2.69	2.10	23.5	3.14	2.20	27.7	3.55	2.29	30.7	3.83	2.35	31.9	3.94	2.38	36.1	4.29	2.47
	70	14.5	2.09	2.04	17.3	2.40	2.11	18.5	2.53	2.15	22.5	2.92	2.26	26.4	3.27	2.37	29.2	3.50	2.45	30.4	3.59	2.48	34.4	3.89	2.59
	80	13.9	1.97	2.07	16.6	2.25	2.16	17.7	2.36	2.20	21.4	2.71	2.32	25.2	3.02	2.45	27.8	3.21	2.54	28.9	3.29	2.57	32.7	3.55	2.70
1100	60	15.2	2.17	2.05	18.2	2.52	2.11	19.4	2.66	2.14	23.7	3.12	2.23	27.9	3.54	2.31	30.9	3.82	2.37	32.2	3.93	2.40	36.4	4.29	2.49
	70	14.6	2.07	2.07	17.5	2.39	2.15	18.7	2.51	2.18	22.7	2.91	2.29	26.7	3.27	2.40	29.5	3.50	2.47	30.7	3.60	2.50	34.7	3.90	2.61
	80	14.1	1.96	2.10	16.7	2.23	2.19	17.8	2.35	2.23	21.6	2.69	2.35	25.4	3.00	2.48	28.0	3.20	2.57	29.1	3.28	2.60	32.9	3.54	2.73

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
950	60	19.0	2.52	2.21	22.4	2.83	2.32	23.9	2.96	2.36	28.7	3.35	2.51	33.6	3.70	2.66	37.0	3.92	2.77	38.4	4.01	2.81	43.3	4.28	2.96
	70	18.3	2.36	2.27	21.5	2.64	2.39	22.9	2.76	2.44	27.6	3.10	2.61	32.3	3.40	2.79	35.5	3.59	2.91	36.9	3.66	2.96	41.6	3.90	3.13
	80	17.7	2.22	2.35	20.8	2.46	2.48	22.2	2.56	2.54	26.6	2.86	2.72	31.0	3.12	2.91	34.1	3.29	3.04	35.5	3.35	3.10	39.9	3.56	3.29
1100	60	19.1	2.48	2.26	22.6	2.80	2.36	24.1	2.93	2.41	29.0	3.34	2.55	34.0	3.70	2.70	37.5	3.93	2.80	39.0	4.02	2.84	43.9	4.32	2.98
	70	18.5	2.33	2.33	21.8	2.62	2.44	23.2	2.74	2.49	28.0	3.09	2.65	32.7	3.40	2.82	36.0	3.60	2.93	37.4	3.68	2.98	42.2	3.93	3.15
	80	17.9	2.18	2.40	21.1	2.44	2.53	22.4	2.54	2.58	26.9	2.86	2.76	31.5	3.13	2.95	34.6	3.30	3.07	36.0	3.37	3.13	40.5	3.59	3.31
1250	60	19.2	2.44	2.31	22.8	2.77	2.41	24.3	2.90	2.45	29.3	3.32	2.59	34.3	3.69	2.73	37.9	3.93	2.83	39.4	4.03	2.87	44.4	4.33	3.01
	70	18.7	2.31	2.37	22.1	2.60	2.48	23.5	2.72	2.53	28.3	3.08	2.69	33.1	3.40	2.85	36.5	3.61	2.96	37.9	3.69	3.01	42.7	3.95	3.17
	80	18.1	2.16	2.45	21.3	2.42	2.57	22.7	2.53	2.63	27.2	2.85	2.80	31.8	3.13	2.98	35.0	3.31	3.10	36.4	3.38	3.15	40.9	3.60	3.33

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1175	60	22.1	2.53	2.56	26.0	2.87	2.66	27.7	3.01	2.70	33.4	3.44	2.85	39.0	3.83	2.99	43.0	4.08	3.09	44.7	4.18	3.13	50.3	4.50	3.28
	70	21.3	2.34	2.67	25.1	2.65	2.78	26.8	2.78	2.83	32.2	3.16	2.99	37.7	3.51	3.15	41.5	3.74	3.26	43.2	3.83	3.31	48.6	4.12	3.46
	80	20.8	2.18	2.80	24.4	2.45	2.92	26.0	2.57	2.97	31.2	2.92	3.14	36.5	3.23	3.31	40.2	3.43	3.43	41.7	3.51	3.49	47.0	3.77	3.66
1325	60	22.2	2.50	2.60	26.2	2.85	2.70	28.0	2.99	2.74	33.7	3.44	2.88	39.5	3.84	3.02	43.5	4.10	3.11	45.2	4.20	3.15	50.9	4.54	3.29
	70	21.5	2.32	2.72	25.4	2.64	2.82	27.1	2.77	2.87	32.6	3.17	3.02	38.1	3.53	3.17	42.0	3.76	3.28	43.7	3.86	3.32	49.2	4.15	3.47
	80	20.9	2.15	2.85	24.7	2.44	2.96	26.2	2.56	3.01	31.6	2.92	3.17	36.9	3.24	3.34	40.6	3.45	3.45	42.2	3.54	3.50	47.6	3.81	3.66
1475	60	22.3	2.47	2.65	26.4	2.82	2.74	28.1	2.97	2.78	34.0	3.42	2.91	39.8	3.83	3.05	43.9	4.10	3.14	45.7	4.21	3.18	51.5	4.56	3.31
	70	21.8	2.31	2.76	25.7	2.63	2.86	27.3	2.76	2.91	32.9	3.17	3.05	38.5	3.53	3.20	42.5	3.77	3.30	44.1	3.87	3.34	49.7	4.18	3.49
	80	21.1	2.14	2.89	24.9	2.43	3.00	26.5	2.55	3.05	31.9	2.92	3.20	37.3	3.25	3.36	41.0	3.47	3.47	42.6	3.55	3.52	48.0	3.83	3.68

MSH4BD048K with C6B(AH)-X48(C,U)-(C,D) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
200 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1475	60	25.4	2.45	3.04	29.6	2.73	3.17	31.3	2.85	3.23	37.3	3.20	3.42	43.2	3.51	3.61	47.3	3.71	3.74	49.1	3.79	3.79	55.0	4.05	3.98
	70	24.6	2.24	3.23	28.6	2.49	3.37	30.3	2.60	3.42	36.1	2.92	3.62	41.8	3.21	3.82	45.9	3.39	3.96	47.6	3.47	4.02	53.3	4.70	4.22
	80	24.1	2.06	3.43	27.9	2.29	3.58	29.6	2.38	3.64	35.1	2.67	3.86	40.6	2.93	4.07	44.5	3.10	4.22	46.2	3.16	4.28	51.7	3.37	4.49
1675	60	25.7	2.44	3.09	29.9	2.73	3.21	31.7	2.85	3.26	37.7	3.22	3.44	43.8	3.55	3.62	48.0	3.76	3.74	49.8	3.85	3.80	55.8	4.12	3.97
	70	24.9	2.23	3.27	29.0	2.50	3.40	30.8	2.61	3.46	36.6	2.94	3.65	42.4	3.25	3.83	46.5	3.44	3.96	48.3	3.52	4.02	54.1	3.77	4.21
	80	24.3	2.05	3.48	28.3	2.29	3.62	29.9	2.39	3.68	35.6	2.69	3.88	41.2	2.97	4.07	45.2	3.15	4.21	46.9	3.22	4.27	52.5	3.45	4.47
1875	60	25.8	2.41	3.13	30.1	2.71	3.25	31.9	2.83	3.30	38.1	3.21	3.48	44.3	3.56	3.65	48.6	3.78	3.77	50.4	3.87	3.82	56.6	4.16	3.99
	70	25.2	2.23	3.32	29.4	2.50	3.45	31.2	2.61	3.50	37.1	2.96	3.68	43.0	3.27	3.85	47.1	3.47	3.98	48.9	3.55	4.03	54.8	3.82	4.21
	80	24.6	2.04	3.53	28.6	2.29	3.66	30.3	2.39	3.72	36.0	2.71	3.90	41.7	2.99	4.09	45.7	3.18	4.22	47.4	3.25	4.27	53.1	3.49	4.46

13 SEER + AHU HEATING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(*)-(A,B)

MSH4BD018K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	8.7	2.03	1.26	10.6	2.47	1.26	11.5	2.66	1.27	14.2	3.28	1.27	16.9	3.89	1.28	18.9	4.32	1.28	19.7	4.50	1.28	22.4	5.10	1.29
	70	8.2	2.07	1.17	10.0	2.46	1.19	10.7	2.62	1.20	13.2	3.15	1.23	15.7	3.65	1.26	17.4	3.99	1.28	18.2	4.13	1.29	20.6	4.58	1.32
	80	7.6	2.04	1.09	9.2	2.40	1.12	9.9	2.55	1.13	12.1	3.02	1.17	14.3	3.46	1.21	15.9	3.76	1.24	16.6	3.88	1.25	18.8	4.27	1.29
600	60	8.8	1.97	1.30	10.7	2.41	1.31	11.6	2.59	1.31	14.4	3.21	1.31	17.2	3.82	1.32	19.1	4.25	1.32	20.0	4.43	1.32	22.8	5.03	1.33
	70	8.3	2.00	1.22	10.1	2.39	1.24	10.9	2.55	1.25	13.4	3.08	1.28	15.9	3.58	1.31	17.7	3.91	1.33	18.5	4.06	1.33	21.0	4.52	1.36
	80	7.7	2.00	1.13	9.4	2.35	1.17	10.0	2.50	1.18	12.3	2.96	1.22	14.6	3.38	1.27	16.3	3.67	1.30	17.0	3.78	1.31	19.3	4.16	1.36
700	60	9.0	1.94	1.35	10.9	2.37	1.35	11.8	2.55	1.35	14.6	3.16	1.35	17.4	3.78	1.35	19.4	4.20	1.35	20.2	4.39	1.35	23.0	5.00	1.35
	70	8.4	1.96	1.26	10.2	2.35	1.28	11.0	2.51	1.29	13.6	3.03	1.32	16.2	3.53	1.34	18.0	3.87	1.36	18.8	4.01	1.37	21.4	4.47	1.40
	80	7.9	1.96	1.18	9.5	2.30	1.21	10.2	2.44	1.23	12.5	2.88	1.27	14.8	3.30	1.32	16.4	3.57	1.35	17.1	3.68	1.37	19.5	4.04	1.41

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(*)-(A,B)

MSH4BD024K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
650	60	11.9	2.13	1.64	14.4	2.52	1.67	15.4	2.68	1.69	19.0	3.20	1.74	22.5	3.69	1.79	25.0	4.02	1.82	26.0	4.15	1.84	29.5	4.59	1.89
	70	11.4	2.07	1.61	13.7	2.42	1.66	14.6	2.56	1.68	17.9	3.00	1.75	21.2	3.41	1.82	23.5	3.68	1.87	24.5	3.79	1.89	27.8	4.14	1.97
	80	10.8	1.98	1.59	12.9	2.29	1.65	13.8	2.42	1.67	16.9	2.81	1.76	19.9	3.17	1.84	22.0	3.41	1.90	22.9	3.50	1.92	26.0	3.80	2.00
750	60	12.0	2.09	1.68	14.5	2.48	1.71	15.6	2.64	1.73	19.1	3.16	1.77	22.7	3.66	1.82	25.2	3.99	1.85	26.3	4.13	1.87	29.9	4.58	1.92
	70	11.5	2.04	1.65	13.8	2.38	1.70	14.8	2.52	1.72	18.1	2.97	1.79	21.5	3.39	1.86	23.8	3.66	1.91	24.8	3.77	1.93	28.1	4.13	2.00
	80	10.9	1.96	1.63	13.1	2.27	1.69	14.0	2.39	1.71	17.1	2.79	1.80	20.2	3.15	1.88	22.4	3.38	1.94	23.3	3.48	1.97	26.4	3.78	2.05
850	60	12.1	2.06	1.72	14.6	2.45	1.75	15.7	2.61	1.77	19.3	3.14	1.81	23.0	3.64	1.85	25.5	3.97	1.88	26.6	4.11	1.89	30.2	4.57	1.94
	70	11.6	2.01	1.69	13.9	2.36	1.74	15.0	2.50	1.76	18.3	2.95	1.82	21.7	3.37	1.89	24.1	3.65	1.94	25.1	3.76	1.96	28.5	4.13	2.03
	80	11.0	1.93	1.67	13.2	2.24	1.73	14.1	2.36	1.75	17.3	2.75	1.84	20.4	3.11	1.92	22.6	3.34	1.98	23.5	3.44	2.01	26.6	3.74	2.09

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + MB6B(*)-(A,B,C)

MSH4BD030K with PAH2BMX30K(A,B), or B5BM-X30K-(A,B), or GB5BM-030K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
700	60	15.2	2.25	1.98	18.1	2.60	2.05	19.4	2.74	2.08	23.5	3.18	2.17	27.7	3.59	2.26	30.5	3.85	2.33	31.8	3.96	2.35	35.9	4.30	2.45
	70	14.6	2.14	2.00	17.3	2.44	2.08	18.5	2.57	2.12	22.4	2.95	2.23	26.4	3.30	2.34	29.1	3.52	2.42	30.3	3.61	2.46	34.2	3.90	2.57
	80	14.0	2.01	2.04	16.6	2.28	2.13	17.7	2.39	2.17	21.4	2.73	2.29	25.1	3.04	2.42	27.7	3.23	2.51	28.8	3.31	2.55	32.4	3.56	2.67
800	60	15.3	2.22	2.02	18.2	2.57	2.08	19.5	2.71	2.11	23.7	3.16	2.20	27.9	3.57	2.29	30.9	3.85	2.35	32.1	3.96	2.38	36.3	4.31	2.47
	70	14.7	2.11	2.04	17.5	2.42	2.12	18.7	2.55	2.15	22.7	2.94	2.26	26.6	3.29	2.37	29.4	3.52	2.45	30.6	3.61	2.48	34.6	3.91	2.59
	80	14.1	1.99	2.08	16.8	2.27	2.17	17.9	2.38	2.20	21.6	2.72	2.33	25.4	3.03	2.45	28.0	3.23	2.54	29.1	3.31	2.58	32.9	3.57	2.70
900	60	15.4	2.19	2.06	18.4	2.54	2.12	19.6	2.68	2.14	23.9	3.14	2.23	28.1	3.56	2.32	31.1	3.84	2.38	32.4	3.95	2.40	36.6	4.32	2.49
	70	14.8	2.10	2.08	17.7	2.41	2.15	18.9	2.53	2.18	22.9	2.93	2.29	26.9	3.29	2.40	29.7	3.52	2.47	30.9	3.62	2.51	34.9	3.92	2.61
	80	14.3	1.98	2.11	16.9	2.25	2.20	18.0	2.36	2.24	21.8	2.71	2.36	25.6	3.02	2.48	28.2	3.22	2.57	29.3	3.30	2.61	33.1	3.56	2.73

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + MB6B(*)-(B,C)

MSH4BD036K with PAH2BMX36K(B,C), or B5BM-X36K-B, or GB5BM-036K-B

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
950	60	19.2	2.52	2.24	22.6	2.83	2.34	24.0	2.96	2.38	28.8	3.35	2.52	33.6	3.70	2.67	37.0	3.92	2.77	38.4	4.01	2.81	43.2	4.29	2.96
	70	18.5	2.36	2.30	21.7	2.64	2.41	23.1	2.75	2.46	27.7	3.09	2.63	32.3	3.40	2.79	35.5	3.59	2.91	36.9	3.66	2.96	41.5	3.90	3.12
	80	18.0	2.22	2.38	21.0	2.46	2.50	22.3	2.56	2.56	26.7	2.86	2.74	31.1	3.12	2.92	34.1	3.29	3.04	35.4	3.35	3.10	39.8	3.56	3.28
1100	60	19.4	2.48	2.29	22.8	2.80	2.38	24.3	2.93	2.42	29.2	3.34	2.56	34.0	3.70	2.70	37.5	3.93	2.80	38.9	4.02	2.84	43.8	4.32	2.97
	70	18.7	2.33	2.35	22.0	2.62	2.46	23.4	2.73	2.51	28.1	3.09	2.67	32.7	3.40	2.82	36.0	3.60	2.93	37.4	3.68	2.98	42.1	3.93	3.14
	80	18.1	2.19	2.43	21.3	2.44	2.55	22.6	2.54	2.61	27.0	2.85	2.78	31.5	3.13	2.95	34.6	3.30	3.07	36.0	3.38	3.12	40.4	3.59	3.30
1250	60	19.5	2.44	2.34	23.0	2.77	2.43	24.4	2.90	2.47	29.4	3.32	2.60	34.4	3.69	2.73	37.9	3.93	2.83	39.4	4.03	2.87	44.3	4.33	3.00
	70	18.9	2.31	2.40	22.3	2.60	2.51	23.7	2.72	2.55	28.4	3.08	2.70	33.1	3.40	2.86	36.5	3.61	2.96	37.9	3.69	3.01	42.6	3.96	3.16
	80	18.3	2.17	2.48	21.5	2.42	2.60	22.8	2.53	2.65	27.3	2.85	2.82	31.8	3.13	2.98	35.0	3.31	3.10	36.3	3.38	3.15	40.8	3.61	3.32

13 SEER + AHU HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + MB6B(*)-(B,C)

MSH4BD042K with PAH2BMX42KB, or B5BM-X42K-B, or GB5BM-042K-B

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1175	60	22.3	2.53	2.58	26.2	2.87	2.68	27.9	3.01	2.72	33.5	3.44	2.86	39.1	3.83	3.00	43.0	4.08	3.09	44.7	4.18	3.13	50.2	4.51	3.27
	70	21.5	2.34	2.70	25.3	2.65	2.80	27.0	2.77	2.85	32.4	3.16	3.00	37.8	3.51	3.15	41.5	3.74	3.26	43.2	3.83	3.30	48.6	4.12	3.46
	80	21.0	2.18	2.83	24.6	2.45	2.95	26.2	2.57	2.99	31.4	2.91	3.16	36.5	3.23	3.32	40.2	3.43	3.43	41.7	3.51	3.48	46.9	3.77	3.65
1325	60	22.5	2.51	2.63	26.5	2.85	2.72	28.2	2.99	2.76	33.8	3.43	2.89	39.5	3.84	3.02	43.5	4.10	3.11	45.2	4.21	3.15	50.9	4.55	3.28
	70	21.8	2.33	2.74	25.6	2.64	2.84	27.2	2.77	2.89	32.7	3.16	3.03	38.2	3.53	3.17	42.0	3.76	3.28	43.6	3.86	3.32	49.1	4.16	3.46
	80	21.2	2.16	2.88	24.9	2.44	2.99	26.4	2.56	3.03	31.7	2.92	3.19	37.0	3.24	3.34	40.6	3.45	3.45	42.2	3.54	3.50	47.5	3.81	3.65
1475	60	22.5	2.47	2.67	26.6	2.82	2.76	28.3	2.97	2.80	34.1	3.42	2.92	39.9	3.83	3.05	43.9	4.10	3.14	45.6	4.21	3.18	51.4	4.56	3.30
	70	22.0	2.32	2.79	25.9	2.63	2.88	27.5	2.76	2.93	33.1	3.16	3.06	38.6	3.53	3.20	42.5	3.77	3.30	44.1	3.87	3.34	49.6	4.18	3.48
	80	21.4	2.15	2.92	25.1	2.43	3.03	26.7	2.55	3.07	32.0	2.91	3.22	37.3	3.25	3.37	41.0	3.47	3.47	42.6	3.55	3.52	47.9	3.83	3.67

MSH4BD048K with C6B(A,H)-X48(C,U)-C + MB6B(*)-C

MSH4BD048K with PAH2BMX48KC, or B5BM-X48K-C, or GB5BM-048K-C

		OUTDOOR TEMPERATURE (Deg. F)																							
200 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1475	60	25.6	2.45	3.06	29.8	2.73	3.19	31.6	2.85	3.25	37.6	3.20	3.45	43.6	3.51	3.64	47.8	3.71	3.78	49.6	3.79	3.84	55.6	4.05	4.03
	70	24.7	2.23	3.24	28.8	2.49	3.39	30.6	2.60	3.45	36.4	2.92	3.66	42.3	3.21	3.86	46.4	3.39	4.01	48.1	3.47	4.07	54.0	3.70	4.28
	80	24.2	2.06	3.45	28.1	2.29	3.61	29.8	2.38	3.67	35.5	2.67	3.89	41.1	2.93	4.11	45.0	3.09	4.27	46.7	3.16	4.33	52.3	3.37	4.55
1675	60	25.8	2.44	3.10	30.1	2.73	3.23	31.9	2.85	3.29	38.1	3.22	3.47	44.2	3.55	3.65	48.5	3.76	3.78	50.3	3.85	3.84	56.4	4.12	4.02
	70	25.0	2.23	3.29	29.2	2.50	3.43	31.0	2.61	3.48	36.9	2.94	3.68	42.8	3.25	3.87	47.0	3.44	4.01	48.8	3.52	4.06	54.7	3.77	4.26
	80	24.4	2.04	3.50	28.5	2.29	3.65	30.2	2.39	3.71	35.9	2.69	3.91	41.6	2.97	4.12	45.7	3.15	4.26	47.4	3.22	4.32	53.1	3.44	4.52
1875	60	25.9	2.41	3.15	30.3	2.71	3.27	32.2	2.84	3.33	38.4	3.22	3.50	44.7	3.56	3.68	49.1	3.78	3.81	50.9	3.87	3.86	57.2	4.15	4.04
	70	25.4	2.23	3.34	29.6	2.50	3.47	31.4	2.61	3.52	37.4	2.96	3.71	43.4	3.27	3.89	47.6	3.47	4.02	49.4	3.55	4.08	55.4	3.81	4.26
	80	24.7	2.04	3.55	28.8	2.29	3.69	30.5	2.39	3.74	36.3	2.71	3.94	42.1	2.99	4.13	46.2	3.18	4.26	47.9	3.25	4.32	53.7	3.49	4.51

MSH4BD060K with PAH2BMX60KC, or B5BM-X60K-C, or GB5BM-060K-C

		OUTDOOR TEMPERATURE (Deg. F)																							
200 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1650	60	33.7	2.68	3.69	37.8	2.88	3.86	39.6	2.96	3.93	45.6	3.21	4.17	51.6	3.43	4.42	55.8	3.57	4.59	57.6	3.63	4.66	63.6	3.80	4.90
	70	32.7	2.41	3.97	36.8	2.60	4.15	38.5	2.68	4.22	44.4	2.91	4.47	50.3	3.12	4.72	54.4	3.26	4.89	56.1	3.31	4.96	62.0	3.49	5.21
	80	32.2	2.21	4.28	36.2	2.38	4.46	37.8	2.44	4.54	43.5	2.66	4.80	49.1	2.84	5.06	53.0	2.97	5.24	54.7	3.02	5.32	60.4	3.17	5.58
1850	60	34.0	2.68	3.72	38.2	2.89	3.88	40.0	2.98	3.95	46.1	3.24	4.18	52.2	3.48	4.41	56.5	3.63	4.57	58.3	3.69	4.63	64.4	3.88	4.86
	70	33.0	2.42	4.00	37.2	2.62	4.16	39.0	2.70	4.23	44.9	2.95	4.46	50.8	3.17	4.70	55.0	3.32	4.86	56.8	3.38	4.93	62.7	3.56	5.16
	80	32.4	2.20	4.31	36.5	2.39	4.48	38.2	2.46	4.55	43.9	2.69	4.79	49.7	2.89	5.03	53.7	3.03	5.20	55.4	3.08	5.27	61.2	3.25	5.51
2050	60	33.9	2.65	3.75	38.3	2.88	3.91	40.2	2.97	3.97	46.5	3.25	4.20	52.7	3.50	4.42	57.1	3.66	4.58	59.0	3.72	4.64	65.2	3.93	4.87
	70	33.4	2.43	4.04	37.6	2.63	4.19	39.4	2.71	4.26	45.4	2.97	4.48	51.4	3.21	4.70	55.6	3.36	4.85	57.4	3.42	4.92	63.4	3.62	5.14
	80	32.7	2.21	4.35	36.8	2.40	4.51	38.6	2.47	4.57	44.4	2.71	4.80	50.2	2.93	5.02	54.2	3.07	5.18	56.0	3.13	5.24	61.8	3.32	5.47

MSH4BD018K with GB5BMM024K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
545	60	9.2	2.02	1.33	11.4	2.40	1.40	12.4	2.55	1.42	15.6	3.01	1.52	18.8	3.42	1.61	21.0	3.68	1.68	22.0	3.78	1.71	25.2	4.11	1.80
	70	8.7	2.03	1.25	10.7	2.35	1.34	11.6	2.47	1.38	14.6	2.84	1.50	17.5	3.16	1.63	19.6	3.35	1.71	20.5	3.43	1.75	23.4	3.66	1.88
	80	8.0	1.98	1.19	9.9	2.26	1.29	10.8	2.36	1.34	13.5	2.67	1.48	16.2	2.93	1.62	18.1	3.08	1.72	18.9	3.14	1.76	21.6	3.32	1.91
645	60	9.2	1.96	1.37	11.5	2.34	1.44	12.5	2.50	1.47	15.7	2.97	1.56	19.0	3.38	1.65	21.3	3.65	1.71	22.3	3.76	1.74	25.6	4.10	1.83
	70	8.8	1.97	1.30	10.9	2.29	1.39	11.8	2.42	1.43	14.8	2.80	1.55	17.8	3.13	1.67	19.9	3.33	1.75	20.8	3.41	1.79	23.8	3.65	1.91
	80	8.2	1.94	1.23	10.1	2.22	1.34	10.9	2.33	1.38	13.7	2.64	1.52	16.5	2.90	1.67	18.4	3.06	1.77	19.3	3.12	1.81	22.1	3.30	1.96
745	60	9.4	1.94	1.42	11.7	2.31	1.48	12.7	2.47	1.51	16.0	2.94	1.59	19.2	3.36	1.68	21.5	3.63	1.74	22.5	3.74	1.77	25.8	4.09	1.85
	70	8.9	1.93	1.34	11.0	2.26	1.43	11.9	2.39	1.46	15.0	2.78	1.58	18.0	3.11	1.70	20.2	3.31	1.79	21.1	3.40	1.82	24.2	3.65	1.94
	80	8.3	1.91	1.28	10.3	2.18	1.38	11.1	2.29	1.42	13.9	2.60	1.57	16.7	2.86	1.71	18.6	3.01	1.81	19.5	3.08	1.86	22.3	3.26	2.00

13 SEER + AHU HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD024K with GB5BMM024K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
720	60	13.2	2.38	1.63	15.8	2.72	1.70	16.9	2.86	1.73	20.6	3.28	1.84	24.2	3.65	1.95	26.8	3.89	2.02	27.9	3.98	2.06	31.6	4.28	2.16
	70	12.6	2.32	1.59	15.0	2.61	1.69	16.1	2.73	1.73	19.5	3.07	1.86	23.0	3.37	2.00	25.4	3.56	2.09	26.4	3.63	2.13	29.8	3.86	2.27
	80	12.0	2.23	1.58	14.3	2.48	1.69	15.2	2.58	1.73	18.5	2.87	1.88	21.7	3.12	2.04	23.9	3.27	2.14	24.9	3.33	2.19	28.1	3.52	2.34
820	60	13.3	2.33	1.67	15.9	2.68	1.74	17.0	2.81	1.77	20.7	3.24	1.88	24.5	3.63	1.98	27.1	3.87	2.05	28.2	3.97	2.08	32.0	4.28	2.19
	70	12.7	2.28	1.64	15.2	2.57	1.73	16.2	2.69	1.77	19.7	3.04	1.90	23.2	3.35	2.03	25.7	3.54	2.12	26.7	3.62	2.16	30.2	3.86	2.29
	80	12.1	2.20	1.62	14.4	2.45	1.72	15.4	2.55	1.77	18.7	2.85	1.92	22.0	3.11	2.07	24.3	3.26	2.18	25.2	3.32	2.23	28.5	3.52	2.38
920	60	13.4	2.29	1.71	16.0	2.64	1.78	17.2	2.78	1.81	20.9	3.21	1.91	24.7	3.61	2.01	27.4	3.86	2.08	28.5	3.96	2.11	32.3	4.28	2.21
	70	12.8	2.25	1.68	15.3	2.54	1.77	16.4	2.66	1.81	19.9	3.02	1.93	23.5	3.34	2.06	26.0	3.54	2.15	27.0	3.62	2.19	30.6	3.87	2.32
	80	12.3	2.17	1.66	14.6	2.42	1.76	15.6	2.52	1.81	18.9	2.82	1.96	22.1	3.08	2.11	24.5	3.24	2.22	25.4	3.30	2.26	28.7	3.49	2.41

MSH4BD030K with GB5BMM030K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
930	60	16.6	2.46	1.98	19.8	2.74	2.12	21.1	2.84	2.18	25.7	3.16	2.38	30.2	3.43	2.59	33.4	3.59	2.73	34.8	3.66	2.79	39.3	3.85	2.99
	70	15.9	2.34	2.00	19.0	2.57	2.16	20.3	2.66	2.23	24.6	2.92	2.47	28.9	3.14	2.70	31.9	3.27	2.86	33.2	3.33	2.93	37.6	3.48	3.16
	80	15.4	2.21	2.04	18.2	2.41	2.22	19.5	2.48	2.30	23.6	2.70	2.56	27.6	2.88	2.81	30.5	2.99	2.99	31.7	3.03	3.07	35.8	3.16	3.33
1080	60	16.7	2.41	2.03	20.0	2.70	2.17	21.4	2.81	2.23	26.0	3.15	2.42	30.6	3.43	2.62	33.9	3.60	2.76	35.2	3.67	2.81	39.9	3.89	3.01
	70	16.1	2.29	2.06	19.2	2.54	2.22	20.5	2.63	2.29	24.9	2.91	2.51	29.3	3.15	2.73	32.4	3.29	2.89	33.7	3.35	2.96	38.1	3.52	3.18
	80	15.5	2.17	2.10	18.5	2.38	2.28	19.7	2.46	2.35	23.9	2.70	2.60	28.1	2.89	2.85	31.0	3.01	3.02	32.3	3.05	3.10	36.5	3.19	3.35
1230	60	16.9	2.37	2.08	20.1	2.67	2.22	21.6	2.78	2.27	26.3	3.13	2.46	31.0	3.42	2.65	34.3	3.61	2.79	35.7	3.68	2.84	40.4	3.90	3.03
	70	16.3	2.27	2.11	19.4	2.52	2.26	20.8	2.62	2.33	25.3	2.91	2.55	29.7	3.15	2.77	32.8	3.30	2.92	34.2	3.36	2.98	38.7	3.54	3.20
	80	15.7	2.14	2.16	18.7	2.36	2.33	20.0	2.44	2.40	24.2	2.68	2.64	28.4	2.89	2.88	31.4	3.01	3.05	32.6	3.06	3.13	36.9	3.21	3.37

MSH4BD036K with GB5BMM036K-B

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1035	60	19.2	2.51	2.24	22.9	2.83	2.37	24.5	2.97	2.42	29.8	3.36	2.60	35.1	3.70	2.78	38.8	3.92	2.90	40.4	4.01	2.96	45.7	4.28	3.14
	70	18.5	2.35	2.31	22.1	2.64	2.45	23.6	2.76	2.51	28.7	3.10	2.71	33.8	3.40	2.91	37.4	3.59	3.05	38.9	3.66	3.11	44.0	3.89	3.32
	80	17.9	2.20	2.39	21.3	2.46	2.55	22.8	2.56	2.61	27.7	2.87	2.83	32.6	3.13	3.05	36.0	3.29	3.21	37.4	3.35	3.27	42.3	3.55	3.50
1185	60	19.3	2.47	2.30	23.1	2.81	2.42	24.7	2.94	2.47	30.1	3.35	2.64	35.5	3.71	2.81	39.3	3.94	2.93	40.9	4.03	2.98	46.3	4.31	3.15
	70	18.7	2.32	2.36	22.3	2.62	2.50	23.9	2.74	2.56	29.0	3.10	2.75	34.2	3.41	2.94	37.8	3.61	3.08	39.4	3.69	3.13	44.6	3.93	3.33
	80	18.1	2.17	2.45	21.6	2.44	2.59	23.1	2.54	2.66	28.0	2.86	2.87	33.0	3.14	3.08	36.5	3.31	3.23	38.0	3.38	3.30	42.9	3.59	3.51
1335	60	19.4	2.43	2.34	23.3	2.77	2.46	24.9	2.91	2.51	30.4	3.33	2.68	35.9	3.70	2.84	39.7	3.94	2.96	41.4	4.03	3.01	46.9	4.33	3.18
	70	18.9	2.30	2.41	22.6	2.60	2.54	24.1	2.72	2.60	29.4	3.09	2.79	34.6	3.42	2.97	38.3	3.62	3.10	39.9	3.70	3.16	45.1	3.95	3.35
	80	18.3	2.15	2.49	21.8	2.42	2.64	23.3	2.53	2.70	28.3	2.86	2.91	33.3	3.14	3.11	36.8	3.32	3.26	38.3	3.39	3.32	43.4	3.61	3.53

MSH4BD042K with GB5BMM042K-B

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1385	60	22.4	2.41	2.72	26.3	2.65	2.91	27.9	2.74	2.98	33.4	3.02	3.24	38.9	3.26	3.50	42.7	3.40	3.68	44.3	3.46	3.76	49.8	3.63	4.02
	70	21.7	2.22	2.87	25.4	2.43	3.06	27.0	2.51	3.15	32.2	2.76	3.43	37.5	2.97	3.71	41.2	3.10	3.90	42.8	3.15	3.99	48.1	3.31	4.27
	80	21.1	2.05	3.02	24.7	2.24	3.24	26.2	2.31	3.33	31.3	2.52	3.63	36.3	2.71	3.94	39.9	2.82	4.15	41.4	2.86	4.24	46.4	3.00	4.55
1535	60	22.6	2.39	2.77	26.5	2.64	2.94	28.2	2.74	3.02	33.7	3.03	3.27	39.3	3.28	3.51	43.2	3.43	3.69	44.9	3.49	3.76	50.4	3.68	4.01
	70	21.9	2.21	2.91	25.6	2.43	3.10	27.2	2.51	3.18	32.6	2.77	3.45	38.0	3.00	3.72	41.7	3.13	3.91	43.3	3.19	3.99	48.7	3.35	4.26
	80	21.3	2.03	3.07	24.9	2.23	3.27	26.4	2.31	3.36	31.6	2.54	3.65	36.7	2.73	3.94	40.4	2.85	4.15	41.9	2.90	4.23	47.1	3.05	4.52
1685	60	22.6	2.37	2.81	26.6	2.62	2.98	28.3	2.72	3.05	34.0	3.02	3.30	39.6	3.28	3.54	43.6	3.45	3.71	45.3	3.51	3.78	51.0	3.71	4.03
	70	22.1	2.20	2.95	25.9	2.42	3.13	27.5	2.51	3.21	33.0	2.78	3.47	38.4	3.01	3.73	42.2	3.16	3.92	43.8	3.21	4.00	49.2	3.39	4.26
	80	21.5	2.03	3.11	25.1	2.23	3.31	26.7	2.31	3.39	31.9	2.55	3.67	37.1	2.75	3.95	40.7	2.88	4.15	42.3	2.93	4.23	47.5	3.09	4.51

MSH4BD048K with GB5BMM048K-(B,C)

		OUTDOOR TEMPERATURE (Deg. F)																							
200 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1160	60	26.2	2.59	2.97	30.9	2.83	3.20	32.8	2.92	3.30	39.4	3.19	3.63	46.1	3.42	3.95	50.7	3.56	4.18	52.7	3.61	4.28	59.3	3.77	4.60
	70	25.4	2.36	3.15	29.9	2.58	3.40	31.8	2.66	3.50	38.3	2.91	3.85	44.7	3.12	4.20	49.2	3.25	4.45	51.2	3.30	4.55	57.6	3.45	4.90
	80	24.9	2.18	3.35	29.2	2.37	3.62	31.1	2.44	3.73	37.3	2.66	4.11	43.5	2.84	4.49	47.9	2.95	4.75	49.8	3.00	4.87	56.0	3.13	5.24
1360	60	26.5	2.57	3.02	31.2	2.82	3.24	33.2	2.92	3.33	39.9	3.21	3.64	46.6	3.46	3.95	51.3	3.61	4.17	53.4	3.67	4.26	60.1	3.85	4.58
	70	25.7	2.35	3.20	30.3	2.59	3.44	32.2	2.67	3.53	38.8	2.94	3.87	45.3	3.16	4.20	49.9	3.30	4.43	51.8	3.35	4.53	58.3	3.52	4.86
	80	25.1	2.16	3.41	29.5	2.37	3.66	31.4	2.45	3.76	37.8	2.69	4.12	44.1	2.89	4.48	48.5	3.01	4.73	50.4	3.06	4.83	56.8	3.21	5.19
1560	60	26.6	2.54	3.07	31.4	2.80	3.28	33.4	2.91	3.37	40.3	3.21	3.67	47.1	3.48	3.98	51.9	3.64	4.19	54.0	3.70	4.28	60.8	3.89	4.58
	70	26.1	2.35	3.26	30.7	2.59	3.48	32.7	2.68	3.58	39.2	2.96	3.89	45.8	3.19	4.21	50.5	3.34	4.44	52.4	3.39	4.53	59.0	3.57	4.85
	80	25.4	2.15	3.46	29.9	2.37	3.70	31.8	2.45	3.80	38.2	2.71	4.14	44.6	2.92	4.48	49.1	3.05	4.72	51.0	3.10	4.82	57.4	3.26	5.16

13 SEER + AHU HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD060K with GB5BMM060K-C

		OUTDOOR TEMPERATURE (Deg. F)																							
200 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1400	60	30.3	2.29	3.88	36.4	2.56	4.17	39.0	2.67	4.29	47.7	2.97	4.70	56.4	3.23	5.12	62.5	3.39	5.41	65.1	3.45	5.53	73.8	3.64	5.94
	70	29.4	2.05	4.20	35.4	2.30	4.50	37.9	2.40	4.63	46.5	2.69	5.06	55.0	2.94	5.49	61.0	3.09	5.79	63.6	3.15	5.92	72.1	3.33	6.34
	80	28.9	1.87	4.54	34.7	2.10	4.86	37.2	2.18	5.00	45.6	2.45	5.46	53.9	2.67	5.92	59.7	2.81	6.24	62.3	2.86	6.38	70.6	3.03	6.84
1600	60	30.6	2.30	3.91	36.8	2.58	4.18	39.4	2.69	4.30	48.2	3.01	4.69	57.0	3.29	5.09	63.2	3.46	5.36	65.8	3.52	5.48	74.6	3.73	5.87
	70	29.7	2.07	4.22	35.8	2.33	4.50	38.4	2.43	4.63	47.0	2.74	5.03	55.6	3.00	5.44	61.7	3.16	5.73	64.3	3.22	5.85	72.9	3.42	6.26
	80	29.1	1.87	4.57	35.0	2.11	4.87	37.6	2.20	5.00	46.0	2.49	5.43	54.5	2.73	5.86	60.4	2.88	6.16	62.9	2.94	6.28	71.4	3.12	6.71
1800	60	30.6	2.28	3.93	36.9	2.57	4.20	39.6	2.69	4.32	48.6	3.03	4.70	57.5	3.31	5.09	63.8	3.49	5.36	66.5	3.56	5.48	75.5	3.77	5.86
	70	30.1	2.07	4.26	36.2	2.34	4.53	38.8	2.45	4.65	47.5	2.76	5.04	56.2	3.04	5.43	62.3	3.20	5.70	64.9	3.27	5.82	73.6	3.48	6.21
	80	29.4	1.87	4.60	35.4	2.12	4.89	37.9	2.22	5.01	46.5	2.52	5.41	55.0	2.77	5.82	61.0	2.93	6.10	63.5	2.99	6.23	72.0	3.19	6.63

13 SEER + VSB HEATING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + VSB

MSH4BD018K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	9.0	1.99	1.33	10.9	2.40	1.34	11.8	2.57	1.34	14.5	3.14	1.35	17.2	3.70	1.37	19.2	4.09	1.37	20.0	4.25	1.38	22.7	4.80	1.39
	70	8.5	2.00	1.25	10.3	2.36	1.27	11.0	2.51	1.29	13.5	2.99	1.32	16.0	3.45	1.36	17.7	3.76	1.38	18.5	3.88	1.39	20.9	4.30	1.43
	80	7.9	1.95	1.19	9.5	2.28	1.22	10.2	2.42	1.23	12.4	2.84	1.28	14.6	3.24	1.32	16.2	3.51	1.35	16.9	3.62	1.37	19.1	3.97	1.41
600	60	9.1	1.93	1.37	11.0	2.34	1.38	11.9	2.51	1.39	14.7	3.08	1.40	17.5	3.65	1.41	19.4	4.03	1.41	20.3	4.20	1.42	23.1	4.75	1.43
	70	8.6	1.94	1.30	10.4	2.30	1.33	11.2	2.45	1.34	13.7	2.93	1.37	16.2	3.39	1.40	18.0	3.70	1.43	18.8	3.83	1.44	21.3	4.25	1.47
	80	8.0	1.92	1.23	9.7	2.24	1.26	10.3	2.37	1.28	12.6	2.80	1.33	14.9	3.19	1.38	16.6	3.44	1.41	17.3	3.55	1.43	19.6	3.89	1.48
700	60	9.3	1.91	1.42	11.2	2.31	1.43	12.1	2.48	1.43	14.9	3.05	1.43	17.7	3.61	1.44	19.7	4.00	1.44	20.5	4.17	1.44	23.3	4.72	1.45
	70	8.7	1.91	1.34	10.5	2.27	1.36	11.3	2.42	1.37	13.9	2.90	1.41	16.5	3.36	1.44	18.3	3.67	1.46	19.1	3.80	1.47	21.7	4.22	1.51
	80	8.2	1.89	1.27	9.8	2.20	1.31	10.5	2.33	1.32	12.8	2.73	1.37	15.1	3.11	1.42	16.7	3.36	1.46	17.4	3.47	1.48	19.8	3.80	1.53

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + VSB

MSH4BD024K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
650	60	11.6	2.16	1.57	14.0	2.57	1.59	15.0	2.74	1.61	18.5	3.29	1.65	21.9	3.82	1.69	24.4	4.17	1.71	25.4	4.32	1.73	28.9	4.79	1.77
	70	11.0	2.12	1.52	13.3	2.48	1.56	14.2	2.63	1.58	17.4	3.11	1.65	20.7	3.54	1.71	22.9	3.83	1.75	23.9	3.95	1.77	27.1	4.33	1.84
	80	10.4	2.04	1.50	12.5	2.37	1.55	13.4	2.50	1.57	16.4	2.92	1.64	19.3	3.31	1.71	21.4	3.56	1.77	22.3	3.66	1.79	25.3	3.99	1.86
750	60	11.6	2.12	1.61	14.1	2.53	1.63	15.1	2.70	1.64	18.7	3.25	1.68	22.2	3.78	1.72	24.6	4.14	1.75	25.7	4.29	1.76	29.2	4.77	1.80
	70	11.1	2.08	1.57	13.4	2.44	1.61	14.4	2.59	1.63	17.6	3.06	1.69	20.9	3.51	1.75	23.2	3.80	1.79	24.2	3.92	1.81	27.4	4.31	1.87
	80	10.5	2.01	1.53	12.7	2.34	1.59	13.6	2.47	1.61	16.6	2.89	1.68	19.7	3.27	1.76	21.8	3.52	1.81	22.7	3.63	1.84	25.7	3.95	1.91
850	60	11.8	2.09	1.65	14.2	2.49	1.68	15.3	2.66	1.69	18.9	3.22	1.72	22.4	3.75	1.75	24.9	4.11	1.77	25.9	4.26	1.78	29.5	4.76	1.82
	70	11.2	2.05	1.61	13.5	2.41	1.65	14.5	2.56	1.66	17.9	3.04	1.72	21.2	3.49	1.78	23.5	3.78	1.82	24.5	3.90	1.84	27.8	4.29	1.90
	80	10.7	1.99	1.57	12.8	2.31	1.63	13.7	2.44	1.65	16.8	2.85	1.73	19.8	3.23	1.80	22.0	3.47	1.85	22.9	3.58	1.88	25.9	3.90	1.95

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + VSB

MSH4BD030K with PAH4VMX30K(A,B), or B4VM-X30K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
100 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
750	60	14.7	2.42	1.78	17.6	2.77	1.87	18.9	2.91	1.90	23.1	3.33	2.03	27.2	3.70	2.16	30.1	3.94	2.25	31.4	4.03	2.28	35.6	4.33	2.41
	70	14.1	2.33	1.77	16.8	2.63	1.88	18.0	2.75	1.92	22.0	3.11	2.08	25.9	3.41	2.23	28.7	3.60	2.33	29.9	3.68	2.38	33.8	3.92	2.53
	80	13.5	2.23	1.78	16.1	2.49	1.90	17.2	2.59	1.95	20.9	2.90	2.12	24.7	3.16	2.29	27.3	3.32	2.41	28.4	3.38	2.46	32.1	3.57	2.63
850	60	14.8	2.38	1.82	17.7	2.73	1.90	19.0	2.87	1.94	23.2	3.30	2.06	27.5	3.69	2.19	30.5	3.93	2.27	31.7	4.03	2.31	36.0	4.34	2.43
	70	14.2	2.30	1.81	17.0	2.60	1.92	18.2	2.72	1.96	22.2	3.09	2.11	26.2	3.40	2.26	29.0	3.60	2.36	30.2	3.68	2.41	34.2	3.93	2.56
	80	13.6	2.20	1.82	16.3	2.46	1.93	17.4	2.57	1.99	21.2	2.88	2.16	25.0	3.15	2.33	27.6	3.31	2.44	28.7	3.38	2.49	32.5	3.58	2.66
950	60	14.9	2.34	1.86	17.9	2.70	1.94	19.1	2.84	1.98	23.4	3.28	2.10	27.7	3.67	2.21	30.7	3.92	2.30	32.0	4.02	2.33	36.3	4.34	2.45
	70	14.3	2.27	1.85	17.2	2.58	1.95	18.4	2.70	1.99	22.4	3.07	2.14	26.5	3.39	2.29	29.3	3.60	2.39	30.5	3.68	2.43	34.6	3.93	2.58
	80	13.7	2.17	1.85	16.4	2.44	1.97	17.5	2.54	2.02	21.3	2.86	2.19	25.1	3.13	2.36	27.8	3.30	2.47	28.9	3.36	2.52	32.7	3.57	2.69

13 SEER + VSB HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + VSB
MSH4BD036K with PAH4VMX36KB, or B4VM-X36K-B

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
950	60	17.3	2.48	2.05	21.0	2.83	2.18	22.5	2.96	2.23	27.7	3.36	2.42	32.9	3.71	2.61	36.6	3.92	2.74	38.2	4.00	2.79	43.4	4.26	2.98
	70	16.7	2.35	2.08	20.2	2.65	2.23	21.7	2.77	2.29	26.6	3.12	2.51	31.6	3.41	2.72	35.1	3.59	2.87	36.6	3.66	2.94	41.6	3.87	3.15
	80	16.1	2.21	2.13	19.4	2.48	2.30	20.9	2.58	2.37	25.6	2.88	2.61	30.4	3.14	2.84	33.7	3.29	3.01	35.2	3.35	3.08	39.9	3.53	3.31
1100	60	17.5	2.44	2.10	21.2	2.79	2.23	22.8	2.93	2.28	28.1	3.34	2.46	33.4	3.71	2.64	37.1	3.93	2.77	38.7	4.02	2.82	43.9	4.30	3.00
	70	16.9	2.31	2.14	20.4	2.62	2.28	21.9	2.74	2.35	27.0	3.10	2.55	32.1	3.41	2.76	35.6	3.60	2.90	37.1	3.68	2.96	42.2	3.91	3.17
	80	16.2	2.18	2.19	19.7	2.45	2.35	21.1	2.56	2.42	26.0	2.88	2.65	30.8	3.14	2.88	34.2	3.30	3.04	35.7	3.37	3.11	40.5	3.57	3.33
1250	60	17.6	2.40	2.15	21.3	2.75	2.27	23.0	2.89	2.33	28.3	3.32	2.50	33.7	3.69	2.68	37.5	3.93	2.80	39.1	4.02	2.85	44.5	4.31	3.03
	70	17.1	2.28	2.19	20.6	2.60	2.33	22.2	2.72	2.39	27.3	3.09	2.59	32.5	3.41	2.79	36.1	3.61	2.93	37.6	3.69	2.99	42.7	3.93	3.19
	80	16.5	2.15	2.24	19.9	2.43	2.40	21.4	2.54	2.47	26.3	2.86	2.69	31.2	3.14	2.91	34.6	3.31	3.07	36.1	3.37	3.13	41.0	3.58	3.36

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + VSB
MSH4BD042K with PAH4VMX42K(B,C), or B4VM-X42K-(B,C)

		OUTDOOR TEMPERATURE (Deg. F)																							
150 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1175	60	22.3	2.53	2.58	26.2	2.87	2.68	27.9	3.01	2.72	33.5	3.44	2.86	39.1	3.83	3.00	43.0	4.08	3.09	44.7	4.18	3.13	50.2	4.51	3.27
	70	21.5	2.34	2.70	25.3	2.65	2.80	27.0	2.77	2.85	32.4	3.16	3.00	37.8	3.51	3.15	41.5	3.74	3.26	43.2	3.83	3.30	48.6	4.12	3.46
	80	21.0	2.18	2.83	24.6	2.45	2.95	26.2	2.57	2.99	31.4	2.91	3.16	36.5	3.23	3.32	40.2	3.43	3.43	41.7	3.51	3.48	46.9	3.77	3.65
1325	60	22.5	2.51	2.63	26.5	2.85	2.72	28.2	2.99	2.76	33.8	3.43	2.89	39.5	3.84	3.02	43.5	4.10	3.11	45.2	4.21	3.15	50.9	4.55	3.28
	70	21.8	2.33	2.74	25.6	2.64	2.84	27.2	2.77	2.89	32.7	3.16	3.03	38.2	3.53	3.17	42.0	3.76	3.28	43.6	3.86	3.32	49.1	4.16	3.46
	80	21.2	2.16	2.88	24.9	2.44	2.99	26.4	2.56	3.03	31.7	2.92	3.19	37.0	3.24	3.34	40.6	3.45	3.45	42.2	3.54	3.50	47.5	3.81	3.65
1475	60	22.5	2.47	2.67	26.6	2.82	2.76	28.3	2.97	2.80	34.1	3.42	2.92	39.9	3.83	3.05	43.9	4.10	3.14	45.6	4.21	3.18	51.4	4.56	3.30
	70	22.0	2.32	2.79	25.9	2.63	2.88	27.5	2.76	2.93	33.1	3.16	3.06	38.6	3.53	3.20	42.5	3.77	3.30	44.1	3.87	3.34	49.6	4.18	3.48
	80	21.4	2.15	2.92	25.1	2.43	3.03	26.7	2.55	3.07	32.0	2.91	3.22	37.3	3.25	3.37	41.0	3.47	3.47	42.6	3.55	3.52	47.9	3.83	3.67

MSH4BD048K with C6B(A,H)-X48(C,U)-(C,D) + VSB
MSH4BD048K with PAH4VMX48KC, or B4VM-X48K-C

		OUTDOOR TEMPERATURE (Deg. F)																							
200 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1475	60	25.6	2.45	3.06	29.8	2.73	3.19	31.6	2.85	3.25	37.6	3.20	3.45	43.6	3.51	3.64	47.8	3.71	3.78	49.6	3.79	3.84	55.6	4.05	4.03
	70	24.7	2.23	3.24	28.8	2.49	3.39	30.6	2.60	3.45	36.4	2.92	3.66	42.3	3.21	3.86	46.4	3.39	4.01	48.1	3.47	4.07	54.0	3.70	4.28
	80	24.2	2.06	3.45	28.1	2.29	3.61	29.8	2.38	3.67	35.5	2.67	3.89	41.1	2.93	4.11	45.0	3.09	4.27	46.7	3.16	4.33	52.3	3.37	4.55
1675	60	25.8	2.44	3.10	30.1	2.73	3.23	31.9	2.85	3.29	38.1	3.22	3.47	44.2	3.55	3.65	48.5	3.76	3.78	50.3	3.85	3.84	56.4	4.12	4.02
	70	25.0	2.23	3.29	29.2	2.50	3.43	31.0	2.61	3.48	36.9	2.94	3.68	42.8	3.25	3.87	47.0	3.44	4.01	48.8	3.52	4.06	54.7	3.77	4.26
	80	24.4	2.04	3.50	28.5	2.29	3.65	30.2	2.39	3.71	35.9	2.69	3.91	41.6	2.97	4.12	45.7	3.15	4.26	47.4	3.22	4.32	53.1	3.44	4.52
1875	60	25.9	2.41	3.15	30.3	2.71	3.27	32.2	2.84	3.33	38.4	3.22	3.50	44.7	3.56	3.68	49.1	3.78	3.81	50.9	3.87	3.86	57.2	4.15	4.04
	70	25.4	2.23	3.34	29.6	2.50	3.47	31.4	2.61	3.52	37.4	2.96	3.71	43.4	3.27	3.89	47.6	3.47	4.02	49.4	3.55	4.08	55.4	3.81	4.26
	80	24.7	2.04	3.55	28.8	2.29	3.69	30.5	2.39	3.74	36.3	2.71	3.94	42.1	2.99	4.13	46.2	3.18	4.26	47.9	3.25	4.32	53.7	3.49	4.51

MSH4BD060K with C6B(A,H)-X60(C,U)-(C,D) + VSB
MSH4BD060K with PAH4VMX60KC, or B4VM-X60K-C

		OUTDOOR TEMPERATURE (Deg. F)																							
200 CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1650	60	33.7	2.68	3.69	37.8	2.88	3.86	39.6	2.96	3.93	45.6	3.21	4.17	51.6	3.43	4.42	55.8	3.57	4.59	57.6	3.63	4.66	63.6	3.80	4.90
	70	32.7	2.41	3.97	36.8	2.60	4.15	38.5	2.68	4.22	44.4	2.91	4.47	50.3	3.12	4.72	54.4	3.26	4.89	56.1	3.31	4.96	62.0	3.49	5.21
	80	32.2	2.21	4.28	36.2	2.38	4.46	37.8	2.44	4.54	43.5	2.66	4.80	49.1	2.84	5.06	53.0	2.97	5.24	54.7	3.02	5.32	60.4	3.17	5.58
1850	60	34.0	2.68	3.72	38.2	2.89	3.88	40.0	2.98	3.95	46.1	3.24	4.18	52.2	3.48	4.41	56.5	3.63	4.57	58.3	3.69	4.63	64.4	3.88	4.86
	70	33.0	2.42	4.00	37.2	2.62	4.16	39.0	2.70	4.23	44.9	2.95	4.46	50.8	3.17	4.70	55.0	3.32	4.86	56.8	3.38	4.93	62.7	3.56	5.16
	80	32.4	2.20	4.31	36.5	2.39	4.48	38.2	2.46	4.55	43.9	2.69	4.79	49.7	2.89	5.03	53.7	3.03	5.20	55.4	3.08	5.27	61.2	3.25	5.51
2050	60	33.9	2.65	3.75	38.3	2.88	3.91	40.2	2.97	3.97	46.5	3.25	4.20	52.7	3.50	4.42	57.1	3.66	4.58	59.0	3.72	4.64	65.2	3.93	4.87
	70	33.4	2.43	4.04	37.6	2.63	4.19	39.4	2.71	4.26	45.4	2.97	4.48	51.4	3.21	4.70	55.6	3.36	4.85	57.4	3.42	4.92	63.4	3.62	5.14
	80	32.7	2.21	4.35	36.8	2.40	4.51	38.6	2.47	4.57	44.4	2.71	4.80	50.2	2.93	5.02	54.2	3.07	5.18	56.0	3.13	5.24	61.8	3.32	5.47



MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ®Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2011. All rights reserved.

266D-0711 (Replaces 266D-0310)

Printed in U.S.A. (03/10)