

MAYTAG

TECHNICAL SPECIFICATIONS

Model MSH4BD Series



M120 Product Line

**High Efficiency R-410A Heat Pump
13 SEER — 1.5 - 5 Ton Capacity**

- **12 YEAR ALL PARTS WARRANTY**
- **This product offers a 1 Year Dependability Promise to replace the unit if the compressor fails in the first year of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil to qualify.**
- **Product registration required for 12-year All Parts Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.**




Maytag now offers the choice of a heat pump that uses a more efficient and environmentally friendly refrigerant designated R-410A. The MSH4BD Series of heat pumps offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.

Features and Benefits

- **SmartCool™ 410™ Refrigerant (R-410A)** – Earth friendly non-ozone depleting refrigerant.
- **Designed using galvanized steel** – with a polyester urethane coat finish. The 950 hour salt spray finish resists corrosion 50% better than comparable units.
- **Copper Tube / Aluminum Fin Coils** – Both indoor and outdoor coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **High Pressure Switch** – Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Low Pressure Switch** – Loss of charge protection ensures long compressor life. Auto reset feature prevents nuisance service visits.
- **Liquid Line Filter Drier** – Included with unit, field installed.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Composite Base Pan** - Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.


DIMENSIONS/OUTDOOR SECTION

MSH4BD	018K	024K	030K	036K	042K	048K	060K
H	33	37	41	45	41	45	45
W	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4
D	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4

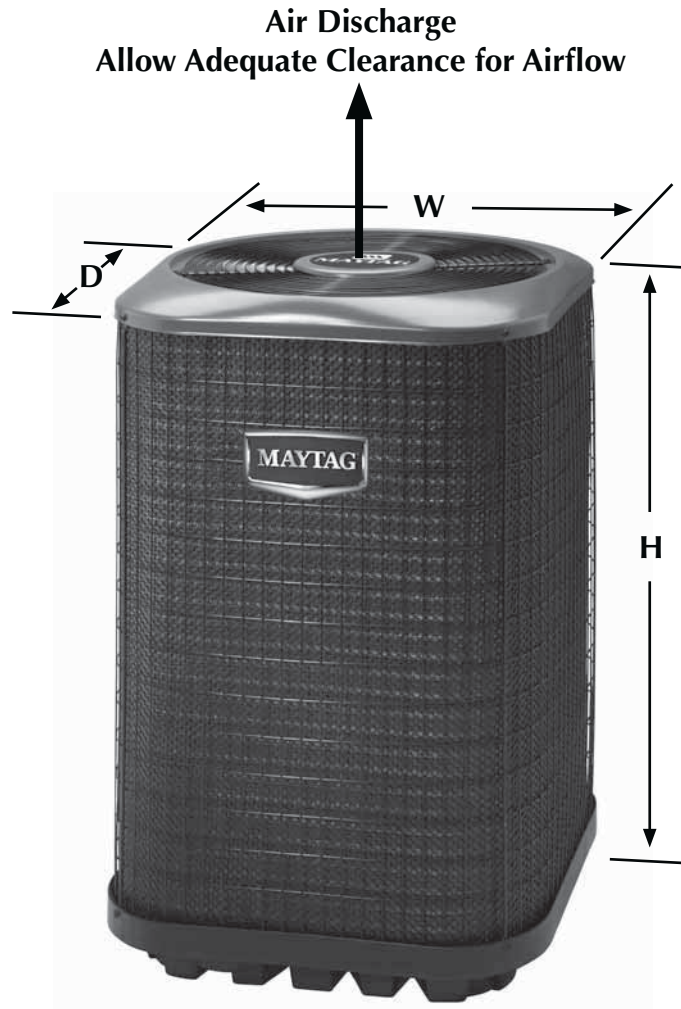

IDENTIFICATION CODE

EX: MSH4BD-036K

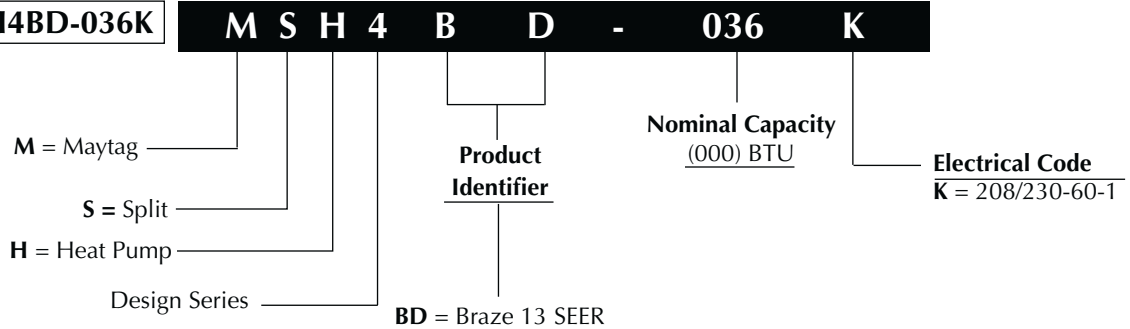

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

13 SEER — High Efficiency — Single Phase

Model Number MSH4BD		018K	024K	030K	036K	042K	048K	060K	
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/203-60-1	208/230-60-1	208-230-60-1	208/230-60-1	
	Total Amps	10	14.4	15.1	17.6	19.3	23.2	27.6	
	Delay Fuse Max. (2)	20	30	30	35	40	45	50	
	Min. Circuit Ampacity	12.2	17.8	18.6	21.8	23.8	28.6	34	
Condenser Data	Coil	Area	17.5	20.3	22.8	22.8	22.8	25.4	25.4
		Rows-FPI	1-20	1-20	1-20	1-20	2-16	2-16	2-16
		Tube Dia	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	1	1	1	1	1.4	1.4	1.4
		Watts-HP	0.25	0.25	0.25	0.25	0.25	0.25	0.25
	Fan Blade	Dia-# Blades	24"-2	24"-2	24"-2	24"-2	24"-2	24"-2	24"-2
		SCFM	3000	3200	3300	3400	3700	3800	3800
	Compressor Data	RLA	9	13.4	14.1	16.6	17.9	21.8	26.2
		LRA	48	58.3	73	79	112	117	134
Refrigerant suction line O.D. (all length of liquid line are 3/8" O.D.)	0-24 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"	
	25-39 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8" (3)	
	40-75 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8" (3)	
Refrigerant charge (R-410A) in ounces for outdoor unit, in door unit and 15' lineset		112	138	145	168	243	248	248	
Weight Approximate (lbs.)	Net	166	171	176	181	247	280	290	
	Ship	175	180	185	190	260	295	305	

(1) Operating Voltage Range: 187v min. — 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 7/8" to 1-1/8" adapter from unit to line.

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit Ampacity
200	150	100	50	
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

SYSTEM COOLING CAPACITIES

13 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number MSH4BD	Indoor Unit Model Number C6B(A,H)-	Cooling Capacity Btuh	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM
024K	X24(C,U)-A + MB6BM	23,800	13	12.5	23,800	8.0	750
024K	X24(C,U)-B + MB6BM	23,800	13	12.5	23,800	8.0	750
030K	X30(C,U)-A + MB6BM	28,400	13	12.0	29,400	7.8	800
030K	X30(C,U)-B + MB6BM	28,400	13	12.0	29,400	7.8	800
036K	X35(C,U)-B + MB6BM	35,600	13	12.0	36,000	8.0	1100
036K	X36(C,U)-A + MB6BM	35,600	13	12.0	36,000	8.0	1100
036K	X36(C,U)-B + MB6BM	35,600	13	12.0	36,000	8.0	1100
042K	X42(C,U)-B + MB6BM	42,000	13	13.0	42,000	8.0	1325
042K	X42(C,U)-C + MB6BM	42,000	13	13.0	42,000	8.0	1325
048K	X48(C,U)-C + MB6BM	48,000	13	11.7	47,000	8.0	1675
060K	X60(C,U)-C + MB6EM	57,000	13	12.0	55,000	8.0	1850

Outdoor Unit Model Number MSH4BD	Indoor Unit Model Number GB5BM-O, B5BM-X	Cooling Capacity Btuh	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM
018K	24K-(A,B)	18,000	13.0	11.05	18,000	7.7	625
024K	24K-(A,B)	23,600	13.0	12.6	23,600	8.0	750
030K	30K-(A,B)	29,400	13.0	12.0	30,000	8.0	850
036K	36K-B	35,400	13.0	11.8	36,000	8.0	1200
042K	42K-B	39,600	13.0	11.7	41,000	8.0	1400
048K	48K-C	48,000	13.0	12.0	48,000	8.0	1600
060K	60K-C	59,500	13.5	11.7	58,000	8.0	1750

Outdoor Unit Model Number MSH4BD	Indoor TXV Coil + TDR	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47F	HSPF	Nominal SCFM
018K	C6B(A,H)-X24(C,U)-(A,B)	18,000	13	12.5	18,200	8.0	585
024K	C6B(A,H)-X24(C,U)-(A,B)	24,000	13	11.6	23,600	8.0	750
030K	C6B(A,H)-X30(C,U)-(A,B,C)	28,000	13	11.6	29,000	8.0	1000
036K	C6B(A,H)-X35(C,U)-B	35,600	13	12	36,000	8.0	1100
036K	C6B(A,H)-X36(C,U)-(B,C)	35,600	13	12	36,000	8.0	1100
042K	C6B(A,H)-X42(C,U)-(B,C)	42,000	13	12.95	42,000	8.0	1325
048K	C6B(A,H)-X47(C,U)-(B,C)	47,500	13	11.75	46,500	8.0	1675
048K	C6B(A,H)-X48(C,U)-(C,D)	47,500	13	11.75	46,500	8.0	1675

See current AHRI Directory for certified combinations and ratings.
www.ahridirectory.org

SYSTEM COOLING CAPACITIES (Continued)

14 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number MSH4BD	Indoor Unit Model Number B4VM-	Cooling Capacity Btuh	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM	Indoor Orifice
018K	(X)24K-B	18,400	14	12.9	18,000	8.0	600	0.050
024K	(X)24K-B	24,000	14	13.4	23,200	8.5	750	0.055
030K	(X)30K-B	29,600	14	12.9	29,600	8.5	900	0.065
036K	(X)36K-B	35,800	14	12.6	37,800	8.5	1180	0.073
042K	(X)48K-C	41,500	14	13.5	41,500	8.5	1400	0.077
048K	(X)48K-C	48,500	14	13.0	47,500	8.5	1600	0.080
060K	(X)60K-C	59,500	13.5	12	57,500	8.5	1700	0.089

See current AHRI Directory for certified combinations and ratings.
www.ahridirectory.org

ACCESSORIES - CONDENSING UNIT

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

13 SEER + LOOSE COIL COOLING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) (LOOSE COIL)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	18.8	16.6	1.33	17.9	16.3	1.47	17.0	16.0	1.62	15.9	15.5	1.78	14.9	14.9	1.96
	80	67	20.5	14.1	1.33	19.5	13.7	1.47	18.5	13.2	1.62	17.4	12.7	1.78	16.1	12.2	1.96
	80	72	22.6	11.3	1.33	21.5	10.9	1.47	20.4	10.5	1.62	19.1	10.0	1.79	17.7	9.6	1.97
	75	63	19.0	13.6	1.34	18.2	13.2	1.47	17.2	12.7	1.62	16.1	12.3	1.78	14.9	11.7	1.96
600	80	62	19.3	17.9	1.36	18.4	17.6	1.50	17.4	17.3	1.64	16.4	16.4	1.80	15.4	15.4	1.99
	80	67	20.9	15.0	1.36	19.9	14.6	1.50	18.9	14.1	1.65	17.7	13.6	1.81	16.3	13.1	1.99
	80	72	23.0	11.9	1.36	21.9	11.5	1.50	20.7	11.1	1.65	19.3	10.6	1.82	17.9	10.1	2.00
	75	63	19.5	14.5	1.36	18.5	14.0	1.50	17.5	13.6	1.64	16.4	13.1	1.81	15.2	12.5	1.99
675	80	62	19.6	19.1	1.39	18.8	18.7	1.52	17.9	17.9	1.67	17.0	17.0	1.84	15.9	15.9	2.01
	80	67	21.3	15.9	1.39	20.2	15.4	1.52	19.1	15.0	1.67	17.9	14.5	1.84	16.5	13.9	2.02
	80	72	23.3	12.5	1.38	22.1	12.1	1.53	20.9	11.7	1.68	19.4	11.2	1.85	18.0	10.7	2.03
	75	63	19.8	15.3	1.39	18.8	14.9	1.53	17.8	14.4	1.68	16.6	13.9	1.84	15.4	13.3	2.02

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) (LOOSE COIL)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	23.9	21.4	1.60	22.8	21.0	1.77	21.6	20.5	1.96	20.4	19.8	2.17	19.0	19.0	2.41
	80	67	25.9	18.0	1.60	24.7	17.5	1.78	23.4	16.9	1.97	22.0	16.3	2.18	20.4	15.6	2.41
	80	72	28.3	14.4	1.60	27.0	14.0	1.78	25.5	13.5	1.97	23.9	12.9	2.19	22.0	12.2	2.42
	75	63	24.1	17.4	1.60	23.0	16.9	1.78	21.8	16.3	1.97	20.5	15.7	2.18	19.0	15.0	2.41
800	80	62	24.4	22.9	1.63	23.3	22.4	1.81	22.2	22.0	2.00	21.0	21.0	2.21	19.6	19.6	2.44
	80	67	26.3	19.1	1.63	25.1	18.6	1.81	23.8	18.0	2.00	22.3	17.4	2.22	20.6	16.7	2.45
	80	72	28.7	15.2	1.64	27.2	14.7	1.82	25.7	14.2	2.01	24.0	13.5	2.23	22.3	12.9	2.46
	75	63	24.6	18.5	1.64	23.4	17.9	1.81	22.2	17.4	2.00	20.8	16.7	2.21	19.3	16.0	2.45
900	80	62	25.0	24.4	1.67	23.9	23.7	1.85	22.8	22.7	2.04	21.5	21.5	2.25	20.1	20.1	2.48
	80	67	26.8	20.2	1.67	25.5	19.7	1.85	24.1	19.1	2.04	22.5	18.4	2.25	20.8	17.7	2.49
	80	72	28.9	15.9	1.67	27.5	15.4	1.86	26.0	14.8	2.05	24.3	14.2	2.26	22.5	13.5	2.50
	75	63	24.9	19.5	1.67	23.8	19.0	1.85	22.5	18.4	2.04	21.0	17.7	2.25	19.4	17.0	2.48

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) (LOOSE COIL)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
800	80	62	28.7	24.9	1.95	27.5	24.5	2.15	26.2	24.0	2.36	24.7	23.2	2.61	23.0	22.4	2.89
	80	67	31.1	21.1	1.96	29.8	20.5	2.16	28.3	19.8	2.37	26.6	19.1	2.62	24.7	18.3	2.89
	80	72	33.9	17.1	1.97	32.4	16.5	2.17	30.7	15.9	2.38	28.8	15.3	2.63	26.8	14.5	2.90
	75	63	29.0	20.4	1.96	27.8	19.9	2.15	26.4	19.2	2.37	24.8	18.5	2.61	23.1	17.7	2.89
1000	80	62	29.9	27.9	2.03	28.6	27.3	2.22	27.2	26.8	2.44	25.7	25.6	2.68	24.1	24.0	2.96
	80	67	32.1	23.3	2.04	30.7	22.7	2.23	29.1	22.0	2.45	27.3	21.2	2.69	25.3	20.4	2.97
	80	72	34.6	18.5	2.04	33.1	17.9	2.24	31.4	17.3	2.46	29.5	16.6	2.70	27.2	15.8	2.98
	75	63	29.9	22.5	2.03	28.6	21.9	2.23	27.2	21.2	2.44	25.5	20.4	2.69	23.6	19.6	2.97
1200	80	62	30.8	30.3	2.11	29.6	29.4	2.30	28.2	28.2	2.52	26.7	26.7	2.76	24.9	24.9	3.04
	80	67	32.7	25.4	2.11	31.3	24.8	2.31	29.6	24.0	2.53	27.7	23.2	2.77	25.7	22.3	3.04
	80	72	35.1	19.8	2.12	33.6	19.2	2.32	31.8	18.6	2.54	29.8	17.8	2.78	27.6	17.0	3.06
	75	63	30.5	24.4	2.11	29.2	23.8	2.31	27.6	23.1	2.52	25.9	22.2	2.76	24.0	21.3	3.04

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) (LOOSE COIL)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	36.0	31.9	2.42	34.5	31.3	2.66	32.7	30.6	2.93	30.8	29.5	3.23	28.6	28.4	3.58
	80	67	39.1	26.9	2.44	37.3	26.1	2.68	35.3	25.3	2.95	33.1	24.3	3.25	30.6	23.3	3.60
	80	72	42.5	21.7	2.46	40.5	21.0	2.70	38.2	20.2	2.97	35.8	19.3	3.27	33.1	18.3	3.61
	75	63	36.4	26.0	2.43	34.8	25.3	2.67	32.9	24.4	2.94	30.9	23.5	3.24	28.6	22.4	3.59
1200	80	62	36.9	34.1	2.48	35.3	33.4	2.72	33.5	32.8	2.99	31.5	31.4	3.29	29.5	29.4	3.64
	80	67	39.7	28.5	2.50	37.9	27.8	2.74	35.9	26.9	3.01	33.6	25.9	3.31	31.0	24.8	3.65
	80	72	43.0	22.8	2.52	41.0	22.1	2.76	38.8	21.2	3.03	36.2	20.3	3.33	33.5	19.3	3.67
	75	63	37.1	27.6	2.49	35.4	26.8	2.73	33.5	25.9	3.00	31.4	25.0	3.30	29.0	23.9	3.64
1350	80	62	37.7	36.2	2.54	36.1	35.3	2.78	34.2	34.2	3.05	32.3	32.3	3.35	30.2	30.2	3.71
	80	67	40.3	30.2	2.56	38.4	29.4	2.80	36.3	28.5	3.07	34.0	27.5	3.37	31.4	26.3	3.71
	80	72	43.5	23.8	2.58	41.5	23.1	2.82	39.1	22.2	3.09	36.6	21.3	3.39	33.7	20.2	3.73
	75	63	37.6	29.1	2.55	35.9	28.3	2.79	33.9	27.4	3.05	31.7	26.4	3.36	29.2	25.2	3.70

13 SEER + LOOSE COIL COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) (LOOSE COIL)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	43.4	38.0	2.71	41.5	37.2	2.97	39.2	36.4	3.26	36.7	35.1	3.59	34.1	33.8	3.97
	80	67	46.9	32.0	2.71	44.8	31.1	2.98	42.3	30.0	3.27	39.5	28.8	3.59	36.5	27.6	3.97
	80	72	51.1	25.9	2.72	48.7	25.0	2.98	45.9	24.0	3.27	42.7	22.9	3.60	39.3	21.6	3.97
	75	63	43.8	31.1	2.71	41.8	30.2	2.98	39.5	29.1	3.27	36.9	27.9	3.60	34.2	26.6	3.97
1400	80	62	44.5	40.7	2.77	42.3	39.8	3.04	40.1	39.1	3.33	37.6	37.5	3.66	35.0	35.0	4.03
	80	67	47.8	34.0	2.78	45.5	33.0	3.04	43.0	32.0	3.33	40.2	30.8	3.66	37.0	29.4	4.03
	80	72	51.7	27.2	2.79	49.1	26.3	3.05	46.3	25.2	3.34	43.2	24.0	3.66	39.8	22.8	4.04
	75	63	44.7	32.9	2.78	42.5	32.0	3.04	40.2	30.9	3.33	37.5	29.7	3.66	34.6	28.3	4.03
1575	80	62	45.3	43.2	2.84	43.3	42.3	3.10	40.9	40.9	3.39	38.5	38.5	3.72	35.9	35.9	4.09
	80	67	48.5	35.9	2.85	46.2	34.9	3.11	43.6	33.8	3.40	40.5	32.5	3.72	37.3	31.1	4.09
	80	72	52.2	28.4	2.85	49.7	27.4	3.11	46.8	26.4	3.41	43.6	25.2	3.73	40.1	23.9	4.10
	75	63	45.3	34.7	2.85	43.2	33.7	3.11	40.7	32.6	3.40	38.0	31.3	3.73	34.9	29.9	4.10

MSH4BD048K with C6B(AH)-X48(C,U)-(C,D) (LOOSE COIL)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	43.1	32.6	3.11	41.5	31.9	3.44	39.8	31.3	3.83	37.8	30.3	4.27	35.6	29.4	4.80
	80	67	47.4	28.5	3.13	45.6	27.7	3.46	43.7	26.8	3.84	41.5	25.8	4.28	39.0	24.7	4.80
	80	72	52.1	24.2	3.15	50.2	23.4	3.48	48.0	22.5	3.86	45.7	21.6	4.30	43.0	20.5	4.82
	75	63	44.1	27.9	3.12	42.4	27.1	3.45	40.6	26.2	3.83	38.5	25.2	4.28	36.2	24.1	4.80
1600	80	62	45.7	36.3	3.20	44.0	35.6	3.53	42.0	35.2	3.91	39.8	34.1	4.35	37.4	32.9	4.87
	80	67	49.7	31.4	3.22	47.7	30.5	3.54	45.6	29.5	3.92	43.2	28.5	4.37	40.6	27.3	4.88
	80	72	54.8	26.1	3.24	52.7	25.2	3.57	50.3	24.3	3.95	47.7	23.3	4.39	44.7	22.2	4.90
	75	63	46.3	30.6	3.20	44.6	29.7	3.53	42.6	28.8	3.91	40.3	27.7	4.36	37.9	26.5	4.88
1800	80	62	47.6	40.0	3.28	45.7	39.4	3.61	43.6	38.6	3.99	41.3	37.4	4.43	38.7	36.1	4.95
	80	67	51.5	34.0	3.30	49.4	33.0	3.63	47.1	32.0	4.01	44.6	30.8	4.45	41.8	29.6	4.96
	80	72	56.6	27.8	3.32	54.3	26.9	3.65	51.7	25.9	4.03	48.8	24.9	4.47	45.5	23.8	4.97
	75	63	48.1	33.0	3.29	46.2	32.1	3.62	44.0	31.1	4.00	41.6	29.8	4.44	39.0	28.6	4.95

13 SEER + AHU COOLING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(*)-(A,B)

MSH4BD018K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	19.1	16.9	1.21	18.2	16.6	1.34	17.2	16.2	1.49	16.2	15.7	1.65	15.2	15.2	1.82
	80	67	20.8	14.3	1.20	19.8	13.9	1.34	18.8	13.4	1.49	17.7	12.9	1.66	16.4	12.4	1.84
	80	72	22.9	11.4	1.21	21.8	11.1	1.35	20.6	10.6	1.50	19.4	10.2	1.66	18.0	9.7	1.84
	75	63	19.3	13.8	1.21	18.4	13.4	1.34	17.5	13.0	1.49	16.4	12.5	1.65	15.2	12.0	1.84
600	80	62	19.5	18.1	1.26	18.6	17.8	1.39	17.6	17.5	1.54	16.7	16.7	1.68	15.7	15.7	1.86
	80	67	21.2	15.1	1.25	20.2	14.7	1.39	19.1	14.3	1.54	17.9	13.8	1.71	16.6	13.2	1.89
	80	72	23.2	12.0	1.25	22.1	11.6	1.39	20.9	11.2	1.55	19.5	10.7	1.71	18.1	10.3	1.90
	75	63	19.7	14.6	1.26	18.7	14.2	1.39	17.7	13.8	1.54	16.6	13.3	1.70	15.4	12.7	1.89
675	80	62	19.7	19.2	1.32	19.0	18.9	1.42	18.1	18.1	1.57	17.2	17.2	1.73	16.1	16.1	1.91
	80	67	21.4	16.0	1.32	20.3	15.5	1.45	19.2	15.1	1.61	18.0	14.5	1.77	16.6	14.0	1.95
	80	72	23.4	12.6	1.31	22.3	12.1	1.45	21.0	11.7	1.61	19.5	11.2	1.78	18.1	10.7	1.96
	75	63	19.9	15.4	1.32	18.9	15.0	1.46	17.9	14.5	1.61	16.7	14.0	1.77	15.5	13.4	1.95

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(*)-(A,B)

MSH4BD024K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	24.2	21.6	1.52	23.1	21.2	1.70	21.9	20.8	1.89	20.6	20.1	2.10	19.4	19.4	2.30
	80	67	26.1	18.2	1.52	25.0	17.6	1.70	23.7	17.1	1.89	22.2	16.5	2.10	20.6	15.8	2.33
	80	72	28.6	14.6	1.52	27.3	14.1	1.70	25.8	13.6	1.90	24.1	13.0	2.11	22.3	12.4	2.34
	75	63	24.4	17.6	1.52	23.3	17.1	1.70	22.1	16.5	1.89	20.8	15.9	2.10	19.3	15.3	2.33
800	80	62	24.5	23.0	1.61	23.4	22.5	1.78	22.3	22.1	1.97	21.2	21.2	2.14	19.9	19.9	2.37
	80	67	26.4	19.2	1.60	25.2	18.7	1.78	23.9	18.1	1.97	22.4	17.5	2.19	20.7	16.8	2.42
	80	72	28.8	15.3	1.61	27.3	14.8	1.79	25.8	14.2	1.98	24.2	13.6	2.19	22.4	12.9	2.43
	75	63	24.7	18.5	1.61	23.5	18.0	1.78	22.3	17.4	1.97	20.9	16.8	2.18	19.4	16.1	2.42
900	80	62	24.8	24.2	1.71	23.9	23.7	1.83	22.8	22.8	2.02	21.6	21.6	2.23	20.2	20.2	2.46
	80	67	26.6	20.1	1.71	25.3	19.6	1.89	23.9	19.0	2.08	22.4	18.3	2.29	20.7	17.6	2.52
	80	72	28.7	15.8	1.71	27.4	15.3	1.89	25.9	14.7	2.09	24.2	14.1	2.30	22.3	13.4	2.53
	75	63	24.8	19.4	1.71	23.6	18.9	1.89	22.3	18.3	2.08	20.9	17.6	2.29	19.3	16.8	2.52

13 SEER + AHU COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + MB6B(*)-(A,B,C)

MSH4BD030K with PAH2BMX30K(A,B), or B5BM-X30K-(A,B), or GB5BM-030K-(A,B)

CFM	ODT		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
875	80	62	29.0	25.9	2.03	27.8	25.4	2.23	26.4	24.9	2.44	24.9	24.0	2.69	23.2	23.1	2.96
	80	67	31.4	21.8	2.04	30.0	21.2	2.24	28.5	20.6	2.45	26.8	19.8	2.69	24.8	19.0	2.97
	80	72	34.0	17.6	2.04	32.5	17.0	2.25	30.8	16.4	2.46	28.9	15.7	2.70	26.8	14.9	2.98
	75	63	29.2	21.1	2.04	28.0	20.5	2.23	26.6	19.9	2.45	25.0	19.1	2.69	23.1	18.3	2.97
1000	80	62	29.3	27.3	2.21	28.0	26.7	2.40	26.6	26.3	2.62	25.3	25.3	2.78	23.7	23.7	3.05
	80	67	31.5	22.8	2.21	30.1	22.2	2.41	28.5	21.6	2.62	26.7	20.8	2.87	24.7	19.9	3.14
	80	72	34.0	18.2	2.22	32.5	17.6	2.42	30.8	17.0	2.63	28.8	16.2	2.88	26.6	15.4	3.15
	75	63	29.3	22.0	2.21	28.0	21.4	2.41	26.6	20.7	2.62	24.9	20.0	2.86	23.0	19.1	3.14
1125	80	62	29.3	28.4	2.43	28.0	27.8	2.62	27.0	27.0	2.72	25.6	25.5	2.97	23.8	23.8	3.24
	80	67	31.4	23.7	2.43	29.9	23.1	2.63	28.3	22.4	2.84	26.5	21.6	3.08	24.4	20.6	3.36
	80	72	33.8	18.7	2.44	32.3	18.1	2.64	30.5	17.4	2.85	28.5	16.7	3.09	26.3	15.8	3.37
	75	63	29.1	22.8	2.43	27.9	22.2	2.63	26.3	21.4	2.84	24.6	20.6	3.08	22.7	19.7	3.36

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + MB6B(*)-(B,C)

MSH4BD036K with PAH2BMX36KB, or B5BM-X36K-B, or GB5BM-036K-B

CFM	ODT		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	36.2	32.0	2.38	34.6	31.4	2.62	32.9	30.7	2.89	30.9	29.7	3.19	28.8	28.5	3.54
	80	67	39.2	27.0	2.40	37.4	26.2	2.64	35.5	25.4	2.90	33.3	24.4	3.21	30.8	23.4	3.55
	80	72	42.6	21.8	2.42	40.7	21.1	2.66	38.3	20.3	2.92	36.0	19.4	3.23	33.3	18.4	3.57
	75	63	36.5	26.1	2.38	34.9	25.4	2.63	33.1	24.5	2.89	31.0	23.6	3.20	28.7	22.6	3.54
1200	80	62	36.7	33.9	2.54	35.1	33.2	2.78	33.3	32.6	3.05	31.5	31.5	3.28	29.5	29.5	3.63
	80	67	39.5	28.4	2.56	37.7	27.6	2.80	35.7	26.8	3.07	33.4	25.8	3.36	30.8	24.7	3.71
	80	72	42.8	22.7	2.58	40.8	22.0	2.82	38.6	21.1	3.09	36.0	20.2	3.38	33.3	19.2	3.73
	75	63	36.9	27.5	2.55	35.2	26.7	2.79	33.3	25.8	3.05	31.2	24.8	3.36	28.8	23.7	3.70
1350	80	62	37.0	35.5	2.75	35.4	34.6	2.99	33.8	33.8	3.15	31.9	31.9	3.46	29.8	29.8	3.81
	80	67	39.6	29.6	2.76	37.8	28.8	3.00	35.6	27.9	3.27	33.3	26.9	3.57	30.7	25.8	3.91
	80	72	42.8	23.5	2.78	40.8	22.7	3.02	38.5	21.8	3.29	35.9	20.9	3.59	33.0	19.8	3.93
	75	63	36.9	28.6	2.75	35.2	27.7	2.99	33.2	26.8	3.26	31.0	25.8	3.56	28.6	24.6	3.90

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + MB6B(*)-(B,C)

MSH4BD042K with PAH2BMX42KB, or B5BM-X42K-B, or GB5BM-042K-B

CFM	ODT		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	43.6	38.2	2.63	41.7	37.5	2.89	39.5	36.7	3.18	37.0	35.3	3.51	34.4	34.0	3.89
	80	67	47.2	32.2	2.63	45.0	31.3	2.90	42.6	30.2	3.19	39.8	29.0	3.51	36.8	27.8	3.89
	80	72	51.4	26.0	2.64	49.0	25.1	2.90	46.2	24.2	3.19	43.0	23.1	3.52	39.6	21.8	3.89
	75	63	44.1	31.3	2.63	42.1	30.4	2.90	39.8	29.3	3.19	37.2	28.1	3.52	34.4	26.8	3.89
1400	80	62	44.4	40.6	2.81	42.2	39.7	3.06	40.0	39.0	3.36	37.5	37.4	3.69	35.1	35.1	4.00
	80	67	47.7	34.0	2.81	45.4	33.0	3.07	42.9	31.9	3.36	40.1	30.7	3.69	36.9	29.3	4.06
	80	72	51.6	27.2	2.81	49.0	26.2	3.07	46.3	25.2	3.36	43.1	24.0	3.69	39.7	22.7	4.06
	75	63	44.6	32.9	2.81	42.4	31.9	3.07	40.1	30.8	3.36	37.5	29.6	3.69	34.5	28.2	4.06
1575	80	62	44.7	42.7	3.02	42.7	41.7	3.28	40.5	40.5	3.50	38.2	38.2	3.83	35.5	35.5	4.20
	80	67	47.9	35.5	3.03	45.6	34.5	3.29	42.9	33.3	3.58	39.9	32.0	3.90	36.7	30.6	4.27
	80	72	51.6	28.1	3.03	49.1	27.1	3.29	46.2	26.0	3.58	43.0	24.8	3.91	39.5	23.5	4.27
	75	63	44.7	34.2	3.03	42.6	33.2	3.29	40.1	32.1	3.58	37.3	30.8	3.91	34.3	29.4	4.28

MSH4BD048K with C6B(A,H)-X48(C,U)-C + MB6B(*)-C

MSH4BD048K with PAH2BMX48KC, or B5BM-X48K-C, or GB5BM-048K-C

CFM	ODT		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	49.7	43.5	3.23	47.6	42.7	3.55	45.3	41.9	3.92	42.7	40.5	4.35	39.8	39.1	4.83
	80	67	53.7	36.7	3.25	51.4	35.7	3.57	48.8	34.5	3.94	45.9	33.3	4.36	42.6	31.9	4.84
	80	72	58.5	29.7	3.27	55.9	28.8	3.59	52.7	27.7	3.95	49.4	26.5	4.38	45.9	25.1	4.85
	75	63	50.1	35.6	3.24	48.0	34.6	3.56	45.6	33.5	3.93	42.9	32.2	4.35	39.9	30.8	4.84
1600	80	62	50.6	46.3	3.41	48.4	45.4	3.73	46.0	44.7	4.10	43.3	42.9	4.52	40.6	40.5	4.96
	80	67	54.3	38.7	3.43	52.0	37.6	3.75	49.2	36.5	4.11	46.2	35.1	4.53	42.8	33.7	5.01
	80	72	58.6	31.0	3.45	56.0	30.0	3.77	53.0	28.8	4.13	49.7	27.6	4.55	46.0	26.2	5.02
	75	63	50.8	37.4	3.41	48.5	36.4	3.73	46.0	35.2	4.10	43.2	33.9	4.53	40.0	32.4	5.01
1800	80	62	51.0	48.7	3.63	48.8	47.7	3.95	46.5	46.5	4.26	44.0	44.0	4.68	41.3	41.2	5.17
	80	67	54.7	40.5	3.65	52.2	39.4	3.97	49.4	38.1	4.33	46.2	36.8	4.75	42.7	35.2	5.23
	80	72	58.8	32.0	3.67	56.2	31.0	3.98	53.1	29.8	4.35	49.7	28.5	4.76	46.0	27.1	5.24
	75	63	51.0	39.1	3.64	48.7	38.0	3.96	46.1	36.7	4.33	43.2	35.3	4.75	39.9	33.8	5.23

13 SEER + AHU COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD060K with PAH2BMX60KC, or B5BM-X60K-C, or GB5BM-060K-C

CFM	ODT		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1750	80	62	54.5	41.2	3.63	52.3	40.4	4.06	49.9	39.5	4.54	47.2	38.1	5.08	43.9	36.5	5.73
	80	67	59.9	36.1	3.66	57.3	34.9	4.09	54.6	33.8	4.57	51.6	32.5	5.11	47.7	30.9	5.77
	80	72	65.6	30.5	3.70	62.9	29.3	4.13	60.2	28.2	4.61	56.8	26.9	5.15	52.4	25.4	5.81
	75	63	55.8	35.3	3.64	53.6	34.2	4.06	51.0	33.0	4.54	48.1	31.7	5.09	44.5	30.2	5.73
2000	80	62	57.7	45.9	3.73	55.2	44.9	4.16	52.5	44.2	4.64	49.6	42.8	5.18	46.1	40.6	5.83
	80	67	62.7	39.7	3.76	59.9	38.5	4.19	57.0	37.2	4.67	53.6	35.8	5.21	49.4	34.1	5.87
	80	72	69.4	32.8	3.81	66.2	31.7	4.24	62.7	30.5	4.71	59.0	29.2	5.25	54.2	27.5	5.91
	75	63	58.6	38.8	3.74	56.0	37.6	4.17	53.3	36.3	4.64	50.2	34.8	5.18	46.3	33.1	5.83
2250	80	62	59.9	50.3	3.87	57.3	49.4	4.30	54.4	48.3	4.77	51.3	46.6	5.31	47.2	44.1	5.97
	80	67	64.7	42.8	3.90	61.8	41.5	4.32	58.7	40.1	4.80	55.2	38.7	5.35	50.8	36.8	6.01
	80	72	71.1	35.0	3.94	67.8	33.8	4.37	64.2	32.5	4.85	60.2	31.2	5.39	55.0	29.5	6.04
	75	63	60.6	41.7	3.87	57.9	40.4	4.30	54.9	39.0	4.77	51.7	37.5	5.32	47.6	35.7	5.97

13 SEER + VSB COOLING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + VSB

MSH4BD018K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

CFM	ODT		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	18.3	16.5	1.08	17.5	16.2	1.22	16.6	15.9	1.36	15.6	15.4	1.53	14.7	14.7	1.71
	80	67	19.9	13.9	1.08	19.0	13.5	1.22	18.0	13.1	1.37	16.9	12.6	1.53	15.7	12.2	1.72
	80	72	21.8	11.1	1.07	20.8	10.7	1.22	19.7	10.3	1.37	18.5	9.9	1.54	17.2	9.5	1.73
	75	63	18.5	13.5	1.08	17.7	13.1	1.22	16.8	12.7	1.37	15.7	12.2	1.53	14.6	11.7	1.72
600	80	62	18.7	17.8	1.10	17.9	17.4	1.24	17.1	17.1	1.37	16.2	16.2	1.54	15.2	15.2	1.73
	80	67	20.3	14.8	1.09	19.4	14.4	1.24	18.3	14.0	1.39	17.2	13.5	1.55	15.9	13.0	1.74
	80	72	22.2	11.7	1.10	21.2	11.3	1.24	20.0	10.9	1.39	18.7	10.5	1.56	17.3	10.0	1.75
	75	63	18.9	14.3	1.10	18.0	13.9	1.24	17.1	13.5	1.39	16.0	13.0	1.55	14.8	12.5	1.74
675	80	62	19.2	19.0	1.11	18.5	18.4	1.25	17.6	17.6	1.40	16.7	16.7	1.56	15.7	15.7	1.75
	80	67	20.6	15.7	1.12	19.6	15.3	1.26	18.6	14.9	1.42	17.4	14.4	1.58	16.1	13.9	1.77
	80	72	22.5	12.3	1.12	21.3	11.9	1.27	20.1	11.5	1.42	18.8	11.0	1.59	17.5	10.5	1.78
	75	63	19.2	15.1	1.12	18.3	14.7	1.26	17.3	14.3	1.41	16.2	13.8	1.58	15.0	13.3	1.77

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + VSB

MSH4BD024K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

CFM	ODT		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	23.2	21.2	1.36	22.2	20.8	1.54	21.0	20.4	1.73	19.8	19.7	1.94	18.7	18.7	2.16
	80	67	25.0	17.7	1.36	23.9	17.2	1.54	22.7	16.7	1.73	21.3	16.1	1.94	19.8	15.5	2.18
	80	72	27.3	14.1	1.35	26.0	13.7	1.54	24.6	13.2	1.74	23.1	12.7	1.95	21.3	12.1	2.19
	75	63	23.4	17.1	1.36	22.3	16.7	1.54	21.2	16.1	1.73	19.9	15.6	1.94	18.5	14.9	2.18
800	80	62	23.6	22.6	1.40	22.6	22.1	1.58	21.7	21.6	1.76	20.5	20.5	1.97	19.2	19.2	2.20
	80	67	25.4	18.8	1.40	24.2	18.3	1.58	22.9	17.8	1.78	21.5	17.2	1.99	20.0	16.5	2.23
	80	72	27.5	14.9	1.41	26.2	14.4	1.59	24.7	13.9	1.79	23.1	13.3	2.00	21.4	12.7	2.24
	75	63	23.7	18.2	1.40	22.6	17.7	1.58	21.4	17.1	1.77	20.1	16.5	1.99	18.7	15.9	2.23
900	80	62	24.2	23.9	1.44	23.3	23.1	1.61	22.2	22.2	1.80	20.9	20.9	2.01	19.6	19.6	2.25
	80	67	25.7	19.8	1.45	24.5	19.3	1.64	23.1	18.7	1.83	21.7	18.1	2.05	20.0	17.4	2.28
	80	72	27.6	15.5	1.45	26.2	15.0	1.65	24.8	14.5	1.84	23.3	13.9	2.06	21.6	13.2	2.30
	75	63	23.9	19.1	1.46	22.8	18.6	1.64	21.6	18.0	1.83	20.2	17.4	2.05	18.7	16.7	2.28

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + VSB

MSH4BD030K with PAH4VMX30K(A,B), or B4VM-X30K-(A,B)

CFM	ODT		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
800	80	62	29.4	25.8	1.73	28.0	25.3	1.93	26.6	24.8	2.15	25.0	24.0	2.39	23.3	23.2	2.67
	80	67	31.7	21.7	1.74	30.3	21.1	1.94	28.7	20.4	2.15	26.9	19.7	2.40	24.9	18.9	2.68
	80	72	34.4	17.4	1.74	32.8	16.8	1.94	31.1	16.2	2.16	29.1	15.5	2.41	26.9	14.7	2.69
	75	63	29.6	21.1	1.73	28.3	20.5	1.93	26.8	19.8	2.15	25.2	19.1	2.39	23.3	18.3	2.67
1000	80	62	30.4	28.9	1.82	29.1	28.3	2.02	27.8	27.7	2.21	26.2	26.2	2.45	24.5	24.5	2.73
	80	67	32.5	24.0	1.82	31.1	23.4	2.02	29.4	22.8	2.24	27.5	22.0	2.49	25.4	21.2	2.77
	80	72	35.2	18.9	1.84	33.5	18.3	2.04	31.7	17.7	2.26	29.6	16.9	2.50	27.2	16.1	2.78
	75	63	30.5	23.3	1.82	29.1	22.7	2.02	27.5	22.0	2.24	25.8	21.2	2.48	23.8	20.4	2.76
1200	80	62	31.5	31.0	1.90	30.2	30.0	2.10	28.8	28.7	2.32	27.1	27.1	2.57	25.2	25.2	2.84
	80	67	33.0	26.2	1.95	31.4	25.5	2.15	29.7	24.8	2.37	27.7	24.0	2.61	25.5	23.1	2.89
	80	72	35.5	20.2	1.96	33.8	19.6	2.16	31.9	18.9	2.38	29.7	18.1	2.62	27.3	17.3	2.90
	75	63	30.9	25.3	1.95	29.4	24.6	2.14	27.8	23.9	2.36	26.0	23.0	2.61	23.9	22.1	2.89

13 SEER + VSB COOLING EXPANDED RATINGS (CONTINUED)

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + VSB
MSH4BD036K with PAH4VMX36KB, or B4VM-X36K-B

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	34.9	31.5	2.28	33.5	31.0	2.51	31.9	30.4	2.78	30.0	29.3	3.07	28.1	28.1	3.39
	80	67	37.9	26.5	2.30	36.2	25.8	2.53	34.3	25.0	2.79	32.3	24.1	3.09	29.9	23.2	3.43
	80	72	41.0	21.2	2.32	39.2	20.6	2.55	37.0	19.8	2.81	34.9	19.0	3.11	32.3	18.1	3.45
	75	63	35.3	25.6	2.28	33.7	24.9	2.52	32.0	24.2	2.78	30.1	23.3	3.08	27.9	22.3	3.41
1200	80	62	35.5	33.5	2.39	34.1	32.8	2.63	32.4	32.2	2.89	30.9	30.9	3.08	28.9	28.9	3.47
	80	67	38.2	28.0	2.41	36.5	27.3	2.64	34.6	26.5	2.90	32.4	25.6	3.20	30.0	24.6	3.53
	80	72	41.2	22.2	2.44	39.5	21.5	2.66	37.4	20.8	2.93	35.0	19.9	3.22	32.4	18.9	3.55
	75	63	35.7	27.1	2.40	34.1	26.4	2.63	32.3	25.5	2.89	30.3	24.6	3.19	28.0	23.6	3.52
1350	80	62	36.1	35.1	2.53	34.5	34.3	2.77	33.2	33.2	2.95	31.4	31.3	3.25	29.3	29.3	3.59
	80	67	38.4	29.4	2.55	36.7	28.6	2.78	34.7	27.8	3.04	32.5	26.9	3.34	30.0	25.8	3.68
	80	72	41.5	23.1	2.57	39.6	22.4	2.81	37.4	21.6	3.06	35.0	20.7	3.36	32.3	19.7	3.69
	75	63	35.8	28.3	2.54	34.2	27.6	2.77	32.4	26.8	3.03	30.3	25.8	3.33	28.0	24.7	3.67

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + VSB
MSH4BD042K with PAH4VMX48K(B,C), or B4VM-X48K-(B,C)

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	42.1	37.6	2.52	40.3	37.0	2.77	38.3	36.2	3.06	35.9	34.9	3.38	33.6	33.5	3.72
	80	67	45.5	31.6	2.53	43.5	30.7	2.78	41.2	29.8	3.07	38.6	28.7	3.39	35.7	27.5	3.75
	80	72	49.4	25.3	2.53	47.2	24.5	2.79	44.5	23.6	3.07	41.7	22.6	3.39	38.5	21.4	3.76
	75	63	42.6	30.7	2.52	40.7	29.8	2.78	38.5	28.8	3.06	36.1	27.8	3.39	33.4	26.6	3.75
1400	80	62	43.0	40.1	2.64	41.0	39.2	2.89	38.9	38.5	3.18	36.8	36.8	3.46	34.4	34.4	3.83
	80	67	46.1	33.5	2.65	44.0	32.6	2.90	41.6	31.6	3.18	38.9	30.5	3.50	35.9	29.2	3.87
	80	72	49.8	26.6	2.66	47.5	25.7	2.91	44.9	24.8	3.19	41.9	23.7	3.51	38.6	22.5	3.87
	75	63	43.1	32.4	2.64	41.2	31.5	2.90	38.9	30.5	3.18	36.4	29.4	3.50	33.6	28.1	3.87
1575	80	62	43.6	42.2	2.79	41.6	41.3	3.04	39.7	39.7	3.28	37.5	37.5	3.60	34.9	34.9	3.96
	80	67	46.4	35.2	2.79	44.3	34.2	3.05	41.8	33.2	3.33	39.0	32.0	3.65	35.9	30.7	4.02
	80	72	50.0	27.6	2.80	47.7	26.7	3.06	45.0	25.8	3.34	42.0	24.6	3.66	38.6	23.4	4.02
	75	63	43.4	33.9	2.79	41.4	33.0	3.05	39.1	32.0	3.33	36.5	30.8	3.65	33.6	29.5	4.02

MSH4BD048K with C6B(A,H)-X48(C,U)-(C,D) + VSB
MSH4BD048K with PAH4VMX48KC, or B4VM-X48K-C

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	43.7	33.1	2.82	42.2	32.5	3.14	40.4	31.9	3.52	38.5	30.9	3.95	36.4	30.0	4.47
	80	67	48.0	28.9	2.83	46.3	28.1	3.15	44.4	27.3	3.53	42.2	26.3	3.96	39.8	25.2	4.47
	80	72	52.7	24.5	2.85	50.8	23.7	3.17	48.7	22.8	3.54	46.4	21.9	3.97	43.8	20.9	4.47
	75	63	44.7	28.3	2.82	43.1	27.5	3.14	41.3	26.6	3.52	39.3	25.7	3.96	36.9	24.6	4.47
1600	80	62	46.4	37.0	2.87	44.7	36.3	3.20	42.8	36.0	3.57	40.6	34.9	4.01	38.3	33.7	4.52
	80	67	50.4	31.9	2.89	48.5	31.1	3.21	46.4	30.1	3.58	44.1	29.1	4.01	41.5	27.9	4.52
	80	72	55.5	26.4	2.91	53.4	25.6	3.23	51.1	24.7	3.60	48.5	23.7	4.02	45.6	22.7	4.52
	75	63	47.0	31.1	2.88	45.2	30.3	3.20	43.3	29.3	3.57	41.1	28.3	4.01	38.7	27.1	4.52
1800	80	62	48.3	40.7	2.95	46.4	40.2	3.27	44.4	39.4	3.65	42.1	38.3	4.08	39.6	37.0	4.59
	80	67	52.2	34.5	2.97	50.2	33.6	3.29	47.9	32.5	3.66	45.5	31.4	4.09	42.7	30.2	4.59
	80	72	57.3	28.1	2.99	55.0	27.3	3.30	52.5	26.4	3.67	49.7	25.4	4.10	46.5	24.2	4.59
	75	63	48.8	33.6	2.96	46.9	32.7	3.28	44.8	31.6	3.65	42.4	30.5	4.08	39.9	29.3	4.59

MSH4BD060K with C6B(A,H)-X60(C,U)-(C,D) + VSB
MSH4BD060K with PAH4VMX60KC, or B4VM-X60K-C

ODT			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1750	80	62	54.5	41.2	3.63	52.3	40.4	4.06	49.9	39.5	4.54	47.2	38.1	5.08	43.9	36.5	5.73
	80	67	59.9	36.1	3.66	57.3	34.9	4.09	54.6	33.8	4.57	51.6	32.5	5.11	47.7	30.9	5.77
	80	72	65.6	30.5	3.70	62.9	29.3	4.13	60.2	28.2	4.61	56.8	26.9	5.15	52.4	25.4	5.81
	75	63	55.8	35.3	3.64	53.6	34.2	4.06	51.0	33.0	4.54	48.1	31.7	5.09	44.5	30.2	5.73
2000	80	62	57.7	45.9	3.73	55.2	44.9	4.16	52.5	44.2	4.64	49.6	42.8	5.18	46.1	40.6	5.83
	80	67	62.7	39.7	3.76	59.9	38.5	4.19	57.0	37.2	4.67	53.6	35.8	5.21	49.4	34.1	5.87
	80	72	69.4	32.8	3.81	66.2	31.7	4.24	62.7	30.5	4.71	59.0	29.2	5.25	54.2	27.5	5.91
	75	63	58.6	38.8	3.74	56.0	37.6	4.17	53.3	36.3	4.64	50.2	34.8	5.18	46.3	33.1	5.83
2250	80	62	59.9	50.3	3.87	57.3	49.4	4.30	54.4	48.3	4.77	51.3	46.6	5.31	47.2	44.1	5.97
	80	67	64.7	42.8	3.90	61.8	41.5	4.32	58.7	40.1	4.80	55.2	38.7	5.35	50.8	36.8	6.01
	80	72	71.1	35.0	3.94	67.8	33.8	4.37	64.2	32.5	4.85	60.2	31.2	5.39	55.0	29.5	6.04
	75	63	60.6	41.7	3.87	57.9	40.4	4.30	54.9	39.0	4.77	51.7	37.5	5.32	47.6	35.7	5.97

13 SEER + LOOSE COIL HEATING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	10.0	2.18	1.34	11.8	2.54	1.36	12.5	2.69	1.37	15.0	3.18	1.39	17.6	3.66	1.41	19.4	3.98	1.43	20.1	4.12	1.43	22.7	4.56	1.46
	70	9.5	2.20	1.26	11.1	2.50	1.30	11.7	2.63	1.31	14.0	3.03	1.36	16.3	3.40	1.41	17.9	3.65	1.44	18.6	3.75	1.45	20.9	4.07	1.50
	80	8.9	2.16	1.20	10.3	2.43	1.24	10.9	2.53	1.26	12.9	2.88	1.32	15.0	3.19	1.38	16.4	3.39	1.42	17.0	3.48	1.44	19.1	3.74	1.49
600	60	10.0	2.12	1.39	11.8	2.48	1.40	12.6	2.63	1.41	15.2	3.12	1.43	17.8	3.60	1.45	19.6	3.93	1.46	20.4	4.07	1.47	23.0	4.52	1.49
	70	9.6	2.13	1.31	11.2	2.44	1.35	11.9	2.57	1.36	14.2	2.97	1.41	16.6	3.35	1.45	18.2	3.60	1.48	18.9	3.70	1.50	21.2	4.04	1.54
	80	9.0	2.12	1.24	10.5	2.38	1.29	11.1	2.49	1.31	13.2	2.83	1.37	15.3	3.14	1.43	16.8	3.34	1.47	17.4	3.42	1.49	19.5	3.68	1.55
700	60	10.2	2.09	1.43	12.0	2.44	1.45	12.8	2.59	1.45	15.4	3.09	1.47	18.0	3.57	1.48	19.9	3.90	1.49	20.6	4.04	1.50	23.3	4.50	1.51
	70	9.7	2.10	1.35	11.3	2.40	1.38	12.1	2.53	1.40	14.4	2.94	1.44	16.8	3.32	1.49	18.5	3.57	1.52	19.2	3.68	1.53	21.6	4.02	1.58
	80	9.1	2.08	1.29	10.6	2.34	1.33	11.2	2.44	1.35	13.3	2.77	1.41	15.5	3.07	1.48	16.9	3.27	1.52	17.6	3.35	1.54	19.7	3.60	1.60

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
650	60	11.7	2.05	1.67	14.2	2.44	1.70	15.2	2.60	1.72	18.8	3.12	1.76	22.3	3.62	1.81	24.8	3.95	1.84	25.8	4.09	1.85	29.3	4.54	1.89
	70	11.2	1.99	1.64	13.5	2.33	1.69	14.4	2.48	1.71	17.7	2.93	1.78	21.0	3.35	1.84	23.3	3.62	1.89	24.3	3.73	1.91	27.6	4.10	1.97
	80	10.6	1.89	1.64	12.7	2.21	1.69	13.6	2.33	1.71	16.7	2.73	1.79	19.7	3.10	1.86	21.8	3.34	1.91	22.7	3.44	1.94	25.8	3.76	2.01
750	60	11.8	2.01	1.71	14.3	2.40	1.74	15.4	2.57	1.75	18.9	3.09	1.80	22.5	3.59	1.84	25.0	3.93	1.87	26.1	4.07	1.88	29.7	4.53	1.92
	70	11.3	1.95	1.69	13.6	2.30	1.73	14.6	2.44	1.75	17.9	2.90	1.82	21.3	3.32	1.88	23.6	3.60	1.92	24.6	3.72	1.94	27.9	4.09	2.00
	80	10.7	1.87	1.67	12.9	2.18	1.73	13.8	2.31	1.75	16.9	2.71	1.83	20.0	3.08	1.90	22.2	3.32	1.96	23.1	3.42	1.98	26.2	3.74	2.06
850	60	11.9	1.99	1.76	14.4	2.38	1.78	15.5	2.54	1.79	19.1	3.06	1.83	22.8	3.57	1.87	25.3	3.91	1.90	26.4	4.06	1.91	30.0	4.52	1.94
	70	11.4	1.93	1.73	13.7	2.28	1.77	14.8	2.42	1.79	18.1	2.88	1.85	21.5	3.31	1.91	23.9	3.59	1.95	24.9	3.71	1.97	28.3	4.08	2.03
	80	10.8	1.85	1.71	13.0	2.16	1.77	13.9	2.28	1.79	17.1	2.68	1.87	20.2	3.05	1.94	22.4	3.28	2.00	23.3	3.38	2.02	26.4	3.70	2.10

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
900	60	15.0	2.23	1.98	17.9	2.57	2.04	19.2	2.72	2.07	23.3	3.16	2.16	27.5	3.56	2.26	30.3	3.83	2.32	31.6	3.94	2.35	35.7	4.28	2.45
	70	14.4	2.12	2.00	17.1	2.42	2.08	18.3	2.55	2.11	22.2	2.93	2.23	26.2	3.28	2.34	28.9	3.50	2.42	30.1	3.59	2.46	34.0	3.88	2.57
	80	13.8	1.99	2.03	16.4	2.27	2.12	17.5	2.38	2.16	21.2	2.71	2.29	24.9	3.02	2.42	27.5	3.21	2.51	28.6	3.29	2.54	32.2	3.54	2.67
1000	60	15.1	2.20	2.01	18.0	2.55	2.08	19.3	2.69	2.10	23.5	3.14	2.20	27.7	3.55	2.29	30.7	3.83	2.35	31.9	3.94	2.38	36.1	4.29	2.47
	70	14.5	2.09	2.04	17.3	2.40	2.11	18.5	2.53	2.15	22.5	2.92	2.26	26.4	3.27	2.37	29.2	3.50	2.45	30.4	3.59	2.48	34.4	3.89	2.59
	80	13.9	1.97	2.07	16.6	2.25	2.16	17.7	2.36	2.20	21.4	2.71	2.32	25.2	3.02	2.45	27.8	3.21	2.54	28.9	3.29	2.57	32.7	3.55	2.70
1100	60	15.2	2.17	2.05	18.2	2.52	2.11	19.4	2.66	2.14	23.7	3.12	2.23	27.9	3.54	2.31	30.9	3.82	2.37	32.2	3.93	2.40	36.4	4.29	2.49
	70	14.6	2.07	2.07	17.5	2.39	2.15	18.7	2.51	2.18	22.7	2.91	2.29	26.7	3.27	2.40	29.5	3.50	2.47	30.7	3.60	2.50	34.7	3.90	2.61
	80	14.1	1.96	2.10	16.7	2.23	2.19	17.8	2.35	2.23	21.6	2.69	2.35	25.4	3.00	2.48	28.0	3.20	2.57	29.1	3.28	2.60	32.9	3.54	2.73

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
950	60	19.0	2.52	2.21	22.4	2.83	2.32	23.9	2.96	2.36	28.7	3.35	2.51	33.6	3.70	2.66	37.0	3.92	2.77	38.4	4.01	2.81	43.3	4.28	2.96
	70	18.3	2.36	2.27	21.5	2.64	2.39	22.9	2.76	2.44	27.6	3.10	2.61	32.3	3.40	2.79	35.5	3.59	2.91	36.9	3.66	2.96	41.6	3.90	3.13
	80	17.7	2.22	2.35	20.8	2.46	2.48	22.2	2.56	2.54	26.6	2.86	2.72	31.0	3.12	2.91	34.1	3.29	3.04	35.5	3.35	3.10	39.9	3.56	3.29
1100	60	19.1	2.48	2.26	22.6	2.80	2.36	24.1	2.93	2.41	29.0	3.34	2.55	34.0	3.70	2.70	37.5	3.93	2.80	39.0	4.02	2.84	43.9	4.32	2.98
	70	18.5	2.33	2.33	21.8	2.62	2.44	23.2	2.74	2.49	28.0	3.09	2.65	32.7	3.40	2.82	36.0	3.60	2.93	37.4	3.68	2.98	42.2	3.93	3.15
	80	17.9	2.18	2.40	21.1	2.44	2.53	22.4	2.54	2.58	26.9	2.86	2.76	31.5	3.13	2.95	34.6	3.30	3.07	36.0	3.37	3.13	40.5	3.59	3.31
1250	60	19.2	2.44	2.31	22.8	2.77	2.41	24.3	2.90	2.45	29.3	3.32	2.59	34.3	3.69	2.73	37.9	3.93	2.83	39.4	4.03	2.87	44.4	4.33	3.01
	70	18.7	2.31	2.37	22.1	2.60	2.48	23.5	2.72	2.53	28.3	3.08	2.69	33.1	3.40	2.85	36.5	3.61	2.96	37.9	3.69	3.01	42.7	3.95	3.17
	80	18.1	2.16	2.45	21.3	2.42	2.57	22.7	2.53	2.63	27.2	2.85	2.80	31.8	3.13	2.98	35.0	3.31	3.10	36.4	3.38	3.15	40.9	3.60	3.33

13 SEER + LOOSE COIL HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1175	60	22.1	2.53	2.56	26.0	2.87	2.66	27.7	3.01	2.70	33.4	3.44	2.85	39.0	3.83	2.99	43.0	4.08	3.09	44.7	4.18	3.13	50.3	4.50	3.28
	70	21.3	2.34	2.67	25.1	2.65	2.78	26.8	2.78	2.83	32.2	3.16	2.99	37.7	3.51	3.15	41.5	3.74	3.26	43.2	3.83	3.31	48.6	4.12	3.46
	80	20.8	2.18	2.80	24.4	2.45	2.92	26.0	2.57	2.97	31.2	2.92	3.14	36.5	3.23	3.31	40.2	3.43	3.43	41.7	3.51	3.49	47.0	3.77	3.66
1325	60	22.2	2.50	2.60	26.2	2.85	2.70	28.0	2.99	2.74	33.7	3.44	2.88	39.5	3.84	3.02	43.5	4.10	3.11	45.2	4.20	3.15	50.9	4.54	3.29
	70	21.5	2.32	2.72	25.4	2.64	2.82	27.1	2.77	2.87	32.6	3.17	3.02	38.1	3.53	3.17	42.0	3.76	3.28	43.7	3.86	3.32	49.2	4.15	3.47
	80	20.9	2.15	2.85	24.7	2.44	2.96	26.2	2.56	3.01	31.6	2.92	3.17	36.9	3.24	3.34	40.6	3.45	3.45	42.2	3.54	3.50	47.6	3.81	3.66
1475	60	22.3	2.47	2.65	26.4	2.82	2.74	28.1	2.97	2.78	34.0	3.42	2.91	39.8	3.83	3.05	43.9	4.10	3.14	45.7	4.21	3.18	51.5	4.56	3.31
	70	21.8	2.31	2.76	25.7	2.63	2.86	27.3	2.76	2.91	32.9	3.17	3.05	38.5	3.53	3.20	42.5	3.77	3.30	44.1	3.87	3.34	49.7	4.18	3.49
	80	21.1	2.14	2.89	24.9	2.43	3.00	26.5	2.55	3.05	31.9	2.92	3.20	37.3	3.25	3.36	41.0	3.47	3.47	42.6	3.55	3.52	48.0	3.83	3.68

MSH4BD048K with C6B(AH)-X48(C,U)-(C,D) (LOOSE COIL)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1475	60	25.4	2.45	3.04	29.6	2.73	3.17	31.3	2.85	3.23	37.3	3.20	3.42	43.2	3.51	3.61	47.3	3.71	3.74	49.1	3.79	3.79	55.0	4.05	3.98
	70	24.6	2.24	3.23	28.6	2.49	3.37	30.3	2.60	3.42	36.1	2.92	3.62	41.8	3.21	3.82	45.9	3.39	3.96	47.6	3.47	4.02	53.3	3.70	4.22
	80	24.1	2.06	3.43	27.9	2.29	3.58	29.6	2.38	3.64	35.1	2.67	3.86	40.6	2.93	4.07	44.5	3.10	4.22	46.2	3.16	4.28	51.7	3.37	4.49
1675	60	25.7	2.44	3.09	29.9	2.73	3.21	31.7	2.85	3.26	37.7	3.22	3.44	43.8	3.55	3.62	48.0	3.76	3.74	49.8	3.85	3.80	55.8	4.12	3.97
	70	24.9	2.23	3.27	29.0	2.50	3.40	30.8	2.61	3.46	36.6	2.94	3.65	42.4	3.25	3.83	46.5	3.44	3.96	48.3	3.52	4.02	54.1	3.77	4.21
	80	24.3	2.05	3.48	28.3	2.29	3.62	29.9	2.39	3.68	35.6	2.69	3.88	41.2	2.97	4.07	45.2	3.15	4.21	46.9	3.22	4.27	52.5	3.45	4.47
1875	60	25.8	2.41	3.13	30.1	2.71	3.25	31.9	2.83	3.30	38.1	3.21	3.48	44.3	3.56	3.65	48.6	3.78	3.77	50.4	3.87	3.82	56.6	4.16	3.99
	70	25.2	2.23	3.32	29.4	2.50	3.45	31.2	2.61	3.50	37.1	2.96	3.68	43.0	3.27	3.85	47.1	3.47	3.98	48.9	3.55	4.03	54.8	3.82	4.21
	80	24.6	2.04	3.53	28.6	2.29	3.66	30.3	2.39	3.72	36.0	2.71	3.90	41.7	2.99	4.09	45.7	3.18	4.22	47.4	3.25	4.27	53.1	3.49	4.46

13 SEER + AHU HEATING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(*)-(A,B)

MSH4BD018K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	8.7	2.03	1.26	10.6	2.47	1.26	11.5	2.66	1.27	14.2	3.28	1.27	16.9	3.89	1.28	18.9	4.32	1.28	19.7	4.50	1.28	22.4	5.10	1.29
	70	8.2	2.07	1.17	10.0	2.46	1.19	10.7	2.62	1.20	13.2	3.15	1.23	15.7	3.65	1.26	17.4	3.99	1.28	18.2	4.13	1.29	20.6	4.58	1.32
	80	7.6	2.04	1.09	9.2	2.40	1.12	9.9	2.55	1.13	12.1	3.02	1.17	14.3	3.46	1.21	15.9	3.76	1.24	16.6	3.88	1.25	18.8	4.27	1.29
600	60	8.8	1.97	1.30	10.7	2.41	1.31	11.6	2.59	1.31	14.4	3.21	1.31	17.2	3.82	1.32	19.1	4.25	1.32	20.0	4.43	1.32	22.8	5.03	1.33
	70	8.3	2.00	1.22	10.1	2.39	1.24	10.9	2.55	1.25	13.4	3.08	1.28	15.9	3.58	1.31	17.7	3.91	1.33	18.5	4.06	1.33	21.0	4.52	1.36
	80	7.7	2.00	1.13	9.4	2.35	1.17	10.0	2.50	1.18	12.3	2.96	1.22	14.6	3.38	1.27	16.3	3.67	1.30	17.0	3.78	1.31	19.3	4.16	1.36
700	60	9.0	1.94	1.35	10.9	2.37	1.35	11.8	2.55	1.35	14.6	3.16	1.35	17.4	3.78	1.35	19.4	4.20	1.35	20.2	4.39	1.35	23.0	5.00	1.35
	70	8.4	1.96	1.26	10.2	2.35	1.28	11.0	2.51	1.29	13.6	3.03	1.32	16.2	3.53	1.34	18.0	3.87	1.36	18.8	4.01	1.37	21.4	4.47	1.40
	80	7.9	1.96	1.18	9.5	2.30	1.21	10.2	2.44	1.23	12.5	2.88	1.27	14.8	3.30	1.32	16.4	3.57	1.35	17.1	3.68	1.37	19.5	4.04	1.41

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(*)-(A,B)

MSH4BD024K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
650	60	11.9	2.13	1.64	14.4	2.52	1.67	15.4	2.68	1.69	19.0	3.20	1.74	22.5	3.69	1.79	25.0	4.02	1.82	26.0	4.15	1.84	29.5	4.59	1.89
	70	11.4	2.07	1.61	13.7	2.42	1.66	14.6	2.56	1.68	17.9	3.00	1.75	21.2	3.41	1.82	23.5	3.68	1.87	24.5	3.79	1.89	27.8	4.14	1.97
	80	10.8	1.98	1.59	12.9	2.29	1.65	13.8	2.42	1.67	16.9	2.81	1.76	19.9	3.17	1.84	22.0	3.41	1.90	22.9	3.50	1.92	26.0	3.80	2.00
750	60	12.0	2.09	1.68	14.5	2.48	1.71	15.6	2.64	1.73	19.1	3.16	1.77	22.7	3.66	1.82	25.2	3.99	1.85	26.3	4.13	1.87	29.9	4.58	1.92
	70	11.5	2.04	1.65	13.8	2.38	1.70	14.8	2.52	1.72	18.1	2.97	1.79	21.5	3.39	1.86	23.8	3.66	1.91	24.8	3.77	1.93	28.1	4.13	2.00
	80	10.9	1.96	1.63	13.1	2.27	1.69	14.0	2.39	1.71	17.1	2.79	1.80	20.2	3.15	1.88	22.4	3.38	1.94	23.3	3.48	1.97	26.4	3.78	2.05
850	60	12.1	2.06	1.72	14.6	2.45	1.75	15.7	2.61	1.77	19.3	3.14	1.81	23.0	3.64	1.85	25.5	3.97	1.88	26.6	4.11	1.89	30.2	4.57	1.94
	70	11.6	2.01	1.69	13.9	2.36	1.74	15.0	2.50	1.76	18.3	2.95	1.82	21.7	3.37	1.89	24.1	3.65	1.94	25.1	3.76	1.96	28.5	4.13	2.03
	80	11.0	1.93	1.67	13.2	2.24	1.73	14.1	2.36	1.75	17.3	2.75	1.84	20.4	3.11	1.92	22.6	3.34	1.98	23.5	3.44	2.01	26.6	3.74	2.09

13 SEER + AHU HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + MB6B(*)-(A,B,C)

MSH4BD030K with PAH2BMX30K(A,B), or B5BM-X30K-(A,B), or GB5BM-030K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
700	60	15.2	2.25	1.98	18.1	2.60	2.05	19.4	2.74	2.08	23.5	3.18	2.17	27.7	3.59	2.26	30.5	3.85	2.33	31.8	3.96	2.35	35.9	4.30	2.45
	70	14.6	2.14	2.00	17.3	2.44	2.08	18.5	2.57	2.12	22.4	2.95	2.23	26.4	3.30	2.34	29.1	3.52	2.42	30.3	3.61	2.46	34.2	3.90	2.57
	80	14.0	2.01	2.04	16.6	2.28	2.13	17.7	2.39	2.17	21.4	2.73	2.29	25.1	3.04	2.42	27.7	3.23	2.51	28.8	3.31	2.55	32.4	3.56	2.67
800	60	15.3	2.22	2.02	18.2	2.57	2.08	19.5	2.71	2.11	23.7	3.16	2.20	27.9	3.57	2.29	30.9	3.85	2.35	32.1	3.96	2.38	36.3	4.31	2.47
	70	14.7	2.11	2.04	17.5	2.42	2.12	18.7	2.55	2.15	22.7	2.94	2.26	26.6	3.29	2.37	29.4	3.52	2.45	30.6	3.61	2.48	34.6	3.91	2.59
	80	14.1	1.99	2.08	16.8	2.27	2.17	17.9	2.38	2.20	21.6	2.72	2.33	25.4	3.03	2.45	28.0	3.23	2.54	29.1	3.31	2.58	32.9	3.57	2.70
900	60	15.4	2.19	2.06	18.4	2.54	2.12	19.6	2.68	2.14	23.9	3.14	2.23	28.1	3.56	2.32	31.1	3.84	2.38	32.4	3.95	2.40	36.6	4.32	2.49
	70	14.8	2.10	2.08	17.7	2.41	2.15	18.9	2.53	2.18	22.9	2.93	2.29	26.9	3.29	2.40	29.7	3.52	2.47	30.9	3.62	2.51	34.9	3.92	2.61
	80	14.3	1.98	2.11	16.9	2.25	2.20	18.0	2.36	2.24	21.8	2.71	2.36	25.6	3.02	2.48	28.2	3.22	2.57	29.3	3.30	2.61	33.1	3.56	2.73

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + MB6B(*)-(B,C)

MSH4BD036K with PAH2BMX36KB, or B5BM-X36K-B, or GB5BM-036K-B

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
950	60	19.2	2.52	2.24	22.6	2.83	2.34	24.0	2.96	2.38	28.8	3.35	2.52	33.6	3.70	2.67	37.0	3.92	2.77	38.4	4.01	2.81	43.2	4.29	2.96
	70	18.5	2.36	2.30	21.7	2.64	2.41	23.1	2.75	2.46	27.7	3.09	2.63	32.3	3.40	2.79	35.5	3.59	2.91	36.9	3.66	2.96	41.5	3.90	3.12
	80	18.0	2.22	2.38	21.0	2.46	2.50	22.3	2.56	2.56	26.7	2.86	2.74	31.1	3.12	2.92	34.1	3.29	3.04	35.4	3.35	3.10	39.8	3.56	3.28
1100	60	19.4	2.48	2.29	22.8	2.80	2.38	24.3	2.93	2.42	29.2	3.34	2.56	34.0	3.70	2.70	37.5	3.93	2.80	38.9	4.02	2.84	43.8	4.32	2.97
	70	18.7	2.33	2.35	22.0	2.62	2.46	23.4	2.73	2.51	28.1	3.09	2.67	32.7	3.40	2.82	36.0	3.60	2.93	37.4	3.68	2.98	42.1	3.93	3.14
	80	18.1	2.19	2.43	21.3	2.44	2.55	22.6	2.54	2.61	27.0	2.85	2.78	31.5	3.13	2.95	34.6	3.30	3.07	36.0	3.38	3.12	40.4	3.59	3.30
1250	60	19.5	2.44	2.34	23.0	2.77	2.43	24.4	2.90	2.47	29.4	3.32	2.60	34.4	3.69	2.73	37.9	3.93	2.83	39.4	4.03	2.87	44.3	4.33	3.00
	70	18.9	2.31	2.40	22.3	2.60	2.51	23.7	2.72	2.55	28.4	3.08	2.70	33.1	3.40	2.86	36.5	3.61	2.96	37.9	3.69	3.01	42.6	3.96	3.16
	80	18.3	2.17	2.48	21.5	2.42	2.60	22.8	2.53	2.65	27.3	2.85	2.82	31.8	3.13	2.98	35.0	3.31	3.10	36.3	3.38	3.15	40.8	3.61	3.32

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + MB6B(*)-(B,C)

MSH4BD042K with PAH2BMX42KB, or B5BM-X42K-B, or GB5BM-042K-B

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1175	60	22.3	2.53	2.58	26.2	2.87	2.68	27.9	3.01	2.72	33.5	3.44	2.86	39.1	3.83	3.00	43.0	4.08	3.09	44.7	4.18	3.13	50.2	4.51	3.27
	70	21.5	2.34	2.70	25.3	2.65	2.80	27.0	2.77	2.85	32.4	3.16	3.00	37.8	3.51	3.15	41.5	3.74	3.26	43.2	3.83	3.30	48.6	4.12	3.46
	80	21.0	2.18	2.83	24.6	2.45	2.95	26.2	2.57	2.99	31.4	2.91	3.16	36.5	3.23	3.32	40.2	3.43	3.43	41.7	3.51	3.48	46.9	3.77	3.65
1325	60	22.5	2.51	2.63	26.5	2.85	2.72	28.2	2.99	2.76	33.8	3.43	2.89	39.5	3.84	3.02	43.5	4.10	3.11	45.2	4.21	3.15	50.9	4.55	3.28
	70	21.8	2.33	2.74	25.6	2.64	2.84	27.2	2.77	2.89	32.7	3.16	3.03	38.2	3.53	3.17	42.0	3.76	3.28	43.6	3.86	3.32	49.1	4.16	3.46
	80	21.2	2.16	2.88	24.9	2.44	2.99	26.4	2.56	3.03	31.7	2.92	3.19	37.0	3.24	3.34	40.6	3.45	3.45	42.2	3.54	3.50	47.5	3.81	3.65
1475	60	22.5	2.47	2.67	26.6	2.82	2.76	28.3	2.97	2.80	34.1	3.42	2.92	39.9	3.83	3.05	43.9	4.10	3.14	45.6	4.21	3.18	51.4	4.56	3.30
	70	22.0	2.32	2.79	25.9	2.63	2.88	27.5	2.76	2.93	33.1	3.16	3.06	38.6	3.53	3.20	42.5	3.77	3.30	44.1	3.87	3.34	49.6	4.18	3.48
	80	21.4	2.15	2.92	25.1	2.43	3.03	26.7	2.55	3.07	32.0	2.91	3.22	37.3	3.25	3.37	41.0	3.47	3.47	42.6	3.55	3.52	47.9	3.83	3.67

MSH4BD048K with C6B(A,H)-X48(C,U)-C + MB6B(*)-C

MSH4BD048K with PAH2BMX48KC, or B5BM-X48K-C, or GB5BM-048K-C

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1475	60	25.6	2.45	3.06	29.8	2.73	3.19	31.6	2.85	3.25	37.6	3.20	3.45	43.6	3.51	3.64	47.8	3.71	3.78	49.6	3.79	3.84	55.6	4.05	4.03
	70	24.7	2.23	3.24	28.8	2.49	3.39	30.6	2.60	3.45	36.4	2.92	3.66	42.3	3.21	3.86	46.4	3.39	4.01	48.1	3.47	4.07	54.0	3.70	4.28
	80	24.2	2.06	3.45	28.1	2.29	3.61	29.8	2.38	3.67	35.5	2.67	3.89	41.1	2.93	4.11	45.0	3.09	4.27	46.7	3.16	4.33	52.3	3.37	4.55
1675	60	25.8	2.44	3.10	30.1	2.73	3.23	31.9	2.85	3.29	38.1	3.22	3.47	44.2	3.55	3.65	48.5	3.76	3.78	50.3	3.85	3.84	56.4	4.12	4.02
	70	25.0	2.23	3.29	29.2	2.50	3.43	31.0	2.61	3.48	36.9	2.94	3.68	42.8	3.25	3.87	47.0	3.44	4.01	48.8	3.52	4.06	54.7	3.77	4.26
	80	24.4	2.04	3.50	28.5	2.29	3.65	30.2	2.39	3.71	35.9	2.69	3.91	41.6	2.97	4.12	45.7	3.15	4.26	47.4	3.22	4.32	53.1	3.44	4.52
1875	60	25.9	2.41	3.15	30.3	2.71	3.27	32.2	2.84	3.33	38.4	3.22	3.50	44.7	3.56	3.68	49.1	3.78	3.81	50.9	3.87	3.86	57.2	4.15	4.04
	70	25.4	2.23	3.34	29.6	2.50	3.47	31.4	2.61	3.52	37.4	2.96	3.71	43.4	3.27	3.89	47.6	3.47	4.02	49.4	3.55	4.08	55.4	3.81	4.26
	80	24.7	2.04	3.55	28.8	2.29	3.69	30.5	2.39	3.74	36.3	2.71	3.94	42.1	2.99	4.13	46.2	3.18	4.26	47.9	3.25	4.32	53.7	3.49	4.51

13 SEER + AHU HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD060K with PAH2BMX60KC, or B5BM-X60K-C, or GB5BM-060K-C

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1650	60	33.7	2.68	3.69	37.8	2.88	3.86	39.6	2.96	3.93	45.6	3.21	4.17	51.6	3.43	4.42	55.8	3.57	4.59	57.6	3.63	4.66	63.6	3.80	4.90
	70	32.7	2.41	3.97	36.8	2.60	4.15	38.5	2.68	4.22	44.4	2.91	4.47	50.3	3.12	4.72	54.4	3.26	4.89	56.1	3.31	4.96	62.0	3.49	5.21
	80	32.2	2.21	4.28	36.2	2.38	4.46	37.8	2.44	4.54	43.5	2.66	4.80	49.1	2.84	5.06	53.0	2.97	5.24	54.7	3.02	5.32	60.4	3.17	5.58
1850	60	34.0	2.68	3.72	38.2	2.89	3.88	40.0	2.98	3.95	46.1	3.24	4.18	52.2	3.48	4.41	56.5	3.63	4.57	58.3	3.69	4.63	64.4	3.88	4.86
	70	33.0	2.42	4.00	37.2	2.62	4.16	39.0	2.70	4.23	44.9	2.95	4.46	50.8	3.17	4.70	55.0	3.32	4.86	56.8	3.38	4.93	62.7	3.56	5.16
	80	32.4	2.20	4.31	36.5	2.39	4.48	38.2	2.46	4.55	43.9	2.69	4.79	49.7	2.89	5.03	53.7	3.03	5.20	55.4	3.08	5.27	61.2	3.25	5.51
2050	60	33.9	2.65	3.75	38.3	2.88	3.91	40.2	2.97	3.97	46.5	3.25	4.20	52.7	3.50	4.42	57.1	3.66	4.58	59.0	3.72	4.64	65.2	3.93	4.87
	70	33.4	2.43	4.04	37.6	2.63	4.19	39.4	2.71	4.26	45.4	2.97	4.48	51.4	3.21	4.70	55.6	3.36	4.85	57.4	3.42	4.92	63.4	3.62	5.14
	80	32.7	2.21	4.35	36.8	2.40	4.51	38.6	2.47	4.57	44.4	2.71	4.80	50.2	2.93	5.02	54.2	3.07	5.18	56.0	3.13	5.24	61.8	3.32	5.47

13 SEER + VSB HEATING EXPANDED RATINGS

MSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + VSB

MSH4BD018K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	9.0	1.99	1.33	10.9	2.40	1.34	11.8	2.57	1.34	14.5	3.14	1.35	17.2	3.70	1.37	19.2	4.09	1.37	20.0	4.25	1.38	22.7	4.80	1.39
	70	8.5	2.00	1.25	10.3	2.36	1.27	11.0	2.51	1.29	13.5	2.99	1.32	16.0	3.45	1.36	17.7	3.76	1.38	18.5	3.88	1.39	20.9	4.30	1.43
	80	7.9	1.95	1.19	9.5	2.28	1.22	10.2	2.42	1.23	12.4	2.84	1.28	14.6	3.24	1.32	16.2	3.51	1.35	16.9	3.62	1.37	19.1	3.97	1.41
600	60	9.1	1.93	1.37	11.0	2.34	1.38	11.9	2.51	1.39	14.7	3.08	1.40	17.5	3.65	1.41	19.4	4.03	1.41	20.3	4.20	1.42	23.1	4.75	1.43
	70	8.6	1.94	1.30	10.4	2.30	1.33	11.2	2.45	1.34	13.7	2.93	1.37	16.2	3.39	1.40	18.0	3.70	1.43	18.8	3.83	1.44	21.3	4.25	1.47
	80	8.0	1.92	1.23	9.7	2.24	1.26	10.3	2.37	1.28	12.6	2.80	1.33	14.9	3.19	1.38	16.6	3.44	1.41	17.3	3.55	1.43	19.6	3.89	1.48
700	60	9.3	1.91	1.42	11.2	2.31	1.43	12.1	2.48	1.43	14.9	3.05	1.43	17.7	3.61	1.44	19.7	4.00	1.44	20.5	4.17	1.44	23.3	4.72	1.45
	70	8.7	1.91	1.34	10.5	2.27	1.36	11.3	2.42	1.37	13.9	2.90	1.41	16.5	3.36	1.44	18.3	3.67	1.46	19.1	3.80	1.47	21.7	4.22	1.51
	80	8.2	1.89	1.27	9.8	2.20	1.31	10.5	2.33	1.32	12.8	2.73	1.37	15.1	3.11	1.42	16.7	3.36	1.46	17.4	3.47	1.48	19.8	3.80	1.53

MSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + VSB

MSH4BD024K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
650	60	11.6	2.16	1.57	14.0	2.57	1.59	15.0	2.74	1.61	18.5	3.29	1.65	21.9	3.82	1.69	24.4	4.17	1.71	25.4	4.32	1.73	28.9	4.79	1.77
	70	11.0	2.12	1.52	13.3	2.48	1.56	14.2	2.63	1.58	17.4	3.11	1.65	20.7	3.54	1.71	22.9	3.83	1.75	23.9	3.95	1.77	27.1	4.33	1.84
	80	10.4	2.04	1.50	12.5	2.37	1.55	13.4	2.50	1.57	16.4	2.92	1.64	19.3	3.31	1.71	21.4	3.56	1.77	22.3	3.66	1.79	25.3	3.99	1.86
750	60	11.6	2.12	1.61	14.1	2.53	1.63	15.1	2.70	1.64	18.7	3.25	1.68	22.2	3.78	1.72	24.6	4.14	1.75	25.7	4.29	1.76	29.2	4.77	1.80
	70	11.1	2.08	1.57	13.4	2.44	1.61	14.4	2.59	1.63	17.6	3.06	1.69	20.9	3.51	1.75	23.2	3.80	1.79	24.2	3.92	1.81	27.4	4.31	1.87
	80	10.5	2.01	1.53	12.7	2.34	1.59	13.6	2.47	1.61	16.6	2.89	1.68	19.7	3.27	1.76	21.8	3.52	1.81	22.7	3.63	1.84	25.7	3.95	1.91
850	60	11.8	2.09	1.65	14.2	2.49	1.68	15.3	2.66	1.69	18.9	3.22	1.72	22.4	3.75	1.75	24.9	4.11	1.77	25.9	4.26	1.78	29.5	4.76	1.82
	70	11.2	2.05	1.61	13.5	2.41	1.65	14.5	2.56	1.66	17.9	3.04	1.72	21.2	3.49	1.78	23.5	3.78	1.82	24.5	3.90	1.84	27.8	4.29	1.90
	80	10.7	1.99	1.57	12.8	2.31	1.63	13.7	2.44	1.65	16.8	2.85	1.73	19.8	3.23	1.80	22.0	3.47	1.85	22.9	3.58	1.88	25.9	3.90	1.95

MSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + VSB

MSH4BD030K with PAH4VMX30K(A,B), or B4VM-X30K-(A,B)

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
750	60	14.7	2.42	1.78	17.6	2.77	1.87	18.9	2.91	1.90	23.1	3.33	2.03	27.2	3.70	2.16	30.1	3.94	2.25	31.4	4.03	2.28	35.6	4.33	2.41
	70	14.1	2.33	1.77	16.8	2.63	1.88	18.0	2.75	1.92	22.0	3.11	2.08	25.9	3.41	2.23	28.7	3.60	2.33	29.9	3.68	2.38	33.8	3.92	2.53
	80	13.5	2.23	1.78	16.1	2.49	1.90	17.2	2.59	1.95	20.9	2.90	2.12	24.7	3.16	2.29	27.3	3.32	2.41	28.4	3.38	2.46	32.1	3.57	2.63
850	60	14.8	2.38	1.82	17.7	2.73	1.90	19.0	2.87	1.94	23.2	3.30	2.06	27.5	3.69	2.19	30.5	3.93	2.27	31.7	4.03	2.31	36.0	4.34	2.43
	70	14.2	2.30	1.81	17.0	2.60	1.92	18.2	2.72	1.96	22.2	3.09	2.11	26.2	3.40	2.26	29.0	3.60	2.36	30.2	3.68	2.41	34.2	3.93	2.56
	80	13.6	2.20	1.82	16.3	2.46	1.93	17.4	2.57	1.99	21.2	2.88	2.16	25.0	3.15	2.33	27.6	3.31	2.44	28.7	3.38	2.49	32.5	3.58	2.66
950	60	14.9	2.34	1.86	17.9	2.70	1.94	19.1	2.84	1.98	23.4	3.28	2.10	27.7	3.67	2.21	30.7	3.92	2.30	32.0	4.02	2.33	36.3	4.34	2.45
	70	14.3	2.27	1.85	17.2	2.58	1.95	18.4	2.70	1.99	22.4	3.07	2.14	26.5	3.39	2.29	29.3	3.60	2.39	30.5	3.68	2.43	34.6	3.93	2.58
	80	13.7	2.17	1.85	16.4	2.44	1.97	17.5	2.54	2.02	21.3	2.86	2.19	25.1	3.13	2.36	27.8	3.30	2.47	28.9	3.36	2.52	32.7	3.57	2.69

13 SEER + VSB HEATING EXPANDED RATINGS (CONTINUED)

MSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + VSB
MSH4BD036K with PAH4VMX36KB, or B4VM-X36K-B

CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
950	60	17.3	2.48	2.05	21.0	2.83	2.18	22.5	2.96	2.23	27.7	3.36	2.42	32.9	3.71	2.61	36.6	3.92	2.74	38.2	4.00	2.79	43.4	4.26	2.98
	70	16.7	2.35	2.08	20.2	2.65	2.23	21.7	2.77	2.29	26.6	3.12	2.51	31.6	3.41	2.72	35.1	3.59	2.87	36.6	3.66	2.94	41.6	3.87	3.15
	80	16.1	2.21	2.13	19.4	2.48	2.30	20.9	2.58	2.37	25.6	2.88	2.61	30.4	3.14	2.84	33.7	3.29	3.01	35.2	3.35	3.08	39.9	3.53	3.31
1100	60	17.5	2.44	2.10	21.2	2.79	2.23	22.8	2.93	2.28	28.1	3.34	2.46	33.4	3.71	2.64	37.1	3.93	2.77	38.7	4.02	2.82	43.9	4.30	3.00
	70	16.9	2.31	2.14	20.4	2.62	2.28	21.9	2.74	2.35	27.0	3.10	2.55	32.1	3.41	2.76	35.6	3.60	2.90	37.1	3.68	2.96	42.2	3.91	3.17
	80	16.2	2.18	2.19	19.7	2.45	2.35	21.1	2.56	2.42	26.0	2.88	2.65	30.8	3.14	2.88	34.2	3.30	3.04	35.7	3.37	3.11	40.5	3.57	3.33
1250	60	17.6	2.40	2.15	21.3	2.75	2.27	23.0	2.89	2.33	28.3	3.32	2.50	33.7	3.69	2.68	37.5	3.93	2.80	39.1	4.02	2.85	44.5	4.31	3.03
	70	17.1	2.28	2.19	20.6	2.60	2.33	22.2	2.72	2.39	27.3	3.09	2.59	32.5	3.41	2.79	36.1	3.61	2.93	37.6	3.69	2.99	42.7	3.93	3.19
	80	16.5	2.15	2.24	19.9	2.43	2.40	21.4	2.54	2.47	26.3	2.86	2.69	31.2	3.14	2.91	34.6	3.31	3.07	36.1	3.37	3.13	41.0	3.58	3.36

MSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + VSB
MSH4BD042K with PAH4VMX48K(B,C), or B4VM-X48K-(B,C)

CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1175	60	22.3	2.53	2.58	26.2	2.87	2.68	27.9	3.01	2.72	33.5	3.44	2.86	39.1	3.83	3.00	43.0	4.08	3.09	44.7	4.18	3.13	50.2	4.51	3.27
	70	21.5	2.34	2.70	25.3	2.65	2.80	27.0	2.77	2.85	32.4	3.16	3.00	37.8	3.51	3.15	41.5	3.74	3.26	43.2	3.83	3.30	48.6	4.12	3.46
	80	21.0	2.18	2.83	24.6	2.45	2.95	26.2	2.57	2.99	31.4	2.91	3.16	36.5	3.23	3.32	40.2	3.43	3.43	41.7	3.51	3.48	46.9	3.77	3.65
1325	60	22.5	2.51	2.63	26.5	2.85	2.72	28.2	2.99	2.76	33.8	3.43	2.89	39.5	3.84	3.02	43.5	4.10	3.11	45.2	4.21	3.15	50.9	4.55	3.28
	70	21.8	2.33	2.74	25.6	2.64	2.84	27.2	2.77	2.89	32.7	3.16	3.03	38.2	3.53	3.17	42.0	3.76	3.28	43.6	3.86	3.32	49.1	4.16	3.46
	80	21.2	2.16	2.88	24.9	2.44	2.99	26.4	2.56	3.03	31.7	2.92	3.19	37.0	3.24	3.34	40.6	3.45	3.45	42.2	3.54	3.50	47.5	3.81	3.65
1475	60	22.5	2.47	2.67	26.6	2.82	2.76	28.3	2.97	2.80	34.1	3.42	2.92	39.9	3.83	3.05	43.9	4.10	3.14	45.6	4.21	3.18	51.4	4.56	3.30
	70	22.0	2.32	2.79	25.9	2.63	2.88	27.5	2.76	2.93	33.1	3.16	3.06	38.6	3.53	3.20	42.5	3.77	3.30	44.1	3.87	3.34	49.6	4.18	3.48
	80	21.4	2.15	2.92	25.1	2.43	3.03	26.7	2.55	3.07	32.0	2.91	3.22	37.3	3.25	3.37	41.0	3.47	3.47	42.6	3.55	3.52	47.9	3.83	3.67

MSH4BD048K with C6B(A,H)-X48(C,U)-(C,D) + VSB
MSH4BD048K with PAH4VMX48KC, or B4VM-X48K-C

CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1475	60	25.6	2.45	3.06	29.8	2.73	3.19	31.6	2.85	3.25	37.6	3.20	3.45	43.6	3.51	3.64	47.8	3.71	3.78	49.6	3.79	3.84	55.6	4.05	4.03
	70	24.7	2.23	3.24	28.8	2.49	3.39	30.6	2.60	3.45	36.4	2.92	3.66	42.3	3.21	3.86	46.4	3.39	4.01	48.1	3.47	4.07	54.0	3.70	4.28
	80	24.2	2.06	3.45	28.1	2.29	3.61	29.8	2.38	3.67	35.5	2.67	3.89	41.1	2.93	4.11	45.0	3.09	4.27	46.7	3.16	4.33	52.3	3.37	4.55
1675	60	25.8	2.44	3.10	30.1	2.73	3.23	31.9	2.85	3.29	38.1	3.22	3.47	44.2	3.55	3.65	48.5	3.76	3.78	50.3	3.85	3.84	56.4	4.12	4.02
	70	25.0	2.23	3.29	29.2	2.50	3.43	31.0	2.61	3.48	36.9	2.94	3.68	42.8	3.25	3.87	47.0	3.44	4.01	48.8	3.52	4.06	54.7	3.77	4.26
	80	24.4	2.04	3.50	28.5	2.29	3.65	30.2	2.39	3.71	35.9	2.69	3.91	41.6	2.97	4.12	45.7	3.15	4.26	47.4	3.22	4.32	53.1	3.44	4.52
1875	60	25.9	2.41	3.15	30.3	2.71	3.27	32.2	2.84	3.33	38.4	3.22	3.50	44.7	3.56	3.68	49.1	3.78	3.81	50.9	3.87	3.86	57.2	4.15	4.04
	70	25.4	2.23	3.34	29.6	2.50	3.47	31.4	2.61	3.52	37.4	2.96	3.71	43.4	3.27	3.89	47.6	3.47	4.02	49.4	3.55	4.08	55.4	3.81	4.26
	80	24.7	2.04	3.55	28.8	2.29	3.69	30.5	2.39	3.74	36.3	2.71	3.94	42.1	2.99	4.13	46.2	3.18	4.26	47.9	3.25	4.32	53.7	3.49	4.51

MSH4BD060K with C6B(A,H)-X60(C,U)-(C,D) + VSB
MSH4BD060K with PAH4VMX60KC, or B4VM-X60K-C

CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1650	60	33.7	2.68	3.69	37.8	2.88	3.86	39.6	2.96	3.93	45.6	3.21	4.17	51.6	3.43	4.42	55.8	3.57	4.59	57.6	3.63	4.66	63.6	3.80	4.90
	70	32.7	2.41	3.97	36.8	2.60	4.15	38.5	2.68	4.22	44.4	2.91	4.47	50.3	3.12	4.72	54.4	3.26	4.89	56.1	3.31	4.96	62.0	3.49	5.21
	80	32.2	2.21	4.28	36.2	2.38	4.46	37.8	2.44	4.54	43.5	2.66	4.80	49.1	2.84	5.06	53.0	2.97	5.24	54.7	3.02	5.32	60.4	3.17	5.58
1850	60	34.0	2.68	3.72	38.2	2.89	3.88	40.0	2.98	3.95	46.1	3.24	4.18	52.2	3.48	4.41	56.5	3.63	4.57	58.3	3.69	4.63	64.4	3.88	4.86
	70	33.0	2.42	4.00	37.2	2.62	4.16	39.0	2.70	4.23	44.9	2.95	4.46	50.8	3.17	4.70	55.0	3.32	4.86	56.8	3.38	4.93	62.7	3.56	5.16
	80	32.4	2.20	4.31	36.5	2.39	4.48	38.2	2.46	4.55	43.9	2.69	4.79	49.7	2.89	5.03	53.7	3.03	5.20	55.4	3.08	5.27	61.2	3.25	5.51
2050	60	33.9	2.65	3.75	38.3	2.88	3.91	40.2	2.97	3.97	46.5	3.25	4.20	52.7	3.50	4.42	57.1	3.66	4.58	59.0	3.72	4.64	65.2	3.93	4.87
	70	33.4	2.43	4.04	37.6	2.63	4.19	39.4	2.71	4.26	45.4	2.97	4.48	51.4	3.21	4.70	55.6	3.36	4.85	57.4	3.42	4.92	63.4	3.62	5.14
	80	32.7	2.21	4.35	36.8	2.40	4.51	38.6	2.47	4.57	44.4	2.71	4.80	50.2	2.93	5.02	54.2	3.07	5.18	56.0	3.13	5.24	61.8	3.32	5.47



MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ®Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2010. All rights reserved.

266D-0310 (Replaces 266D-1109)

Printed in U.S.A. (03/10)