

**MAYTAG®**

## TECHNICAL SPECIFICATIONS

*Model PPG3GE Series*



M1200 Product Line

**Single Packaged Gas/Electric Units  
14 SEER, 81 % AFUE — 2 - 5 Ton Units**




The PPG3GE Series packaged gas/electric units are high efficiency self contained heating and cooling systems that can be installed on the roof or on a slab. The convertible unit design makes installations simple in all applications. Units are ETL and ETLc listed. The unit is truly designed with the contractor and the consumer in mind.


## Features and Benefits

- **Quality Compressor:** State of the art Copeland Scroll compressor is standard equipment.
- **Compressor Sound Blankets:** standard equipment
- **Proven, Industry Standard Components:** Easier service and availability.
- **High/Low Pressure Switch:** Added compressor protection.
- **Micro-Channel Coils:** Both indoor and outdoor all aluminum coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Liquid Line Filter Drier:** Factory installed at a convenient location for service.
- **Externally Accessible Service Ports:** Quick access to refrigerant system without disrupting operation.
- **Compact Footprint/Low Profile:** Easy to handle and transport.
- **Heavy-Gauge Full Perimeter Base Rails:** Facilitates forklift handling and curb mounting.
- **Convertible Air Delivery:** Horizontal or downflow to accommodate rooftop or horizontal application.
- **Galvanized Steel Cabinet:** Polyurethane finish provides 950 hour salt spray protection to resist corrosion.
- **Wire Guard Coated with Earth Friendly Epoxy and Mesh Hail Guard:** Will never rust and protect the coil from being damaged by balls, lawnmowers, hail etc.
- **Access to Controls and Major Components:** Easy in and out service.
- **Low Voltage Transformer:** Includes 3 Amp fuse to protect low voltage circuit.
- **Corrosion-Resistant Drain Pan:** Quickly drains away evaporator condensate.
- **One Piece Top for Great Fit and Finish, Total Seal:** Well designed, quality construction. Drip edge on top panels whisks away rainwater. Embossed bottom pan keeps blower component compartment dry.
- **Quiet Operation:** Low vibration fan blade combined with custom venturi condenser fan.
- **SmartStart® Control Board:** Provides extended life to igniters using hot surface ignition technology. Programmed to learn the heat-up characteristics of the igniter, then adapt the ignition time to the characteristics of the furnace so the igniter is energized appropriately.
- **Hot Surface igniter:** Innovative application of an appliance type igniter with a 20 year history of reliability.
- **Accessories:** Roof curbs and more.

## IDENTIFICATION CODE

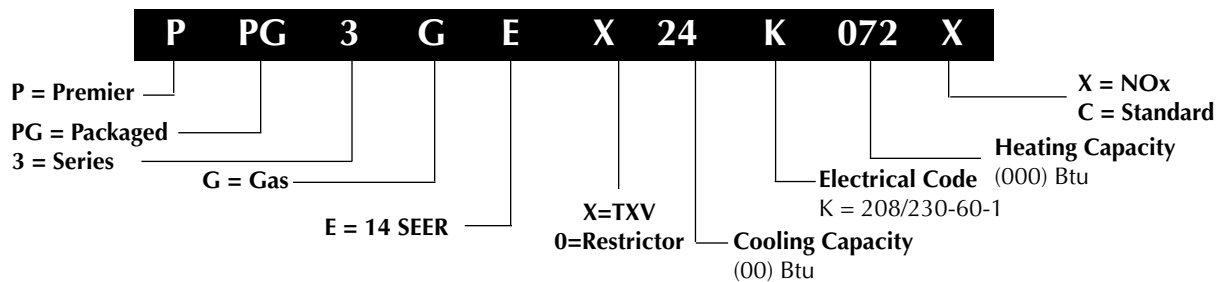

## DIMENSIONS

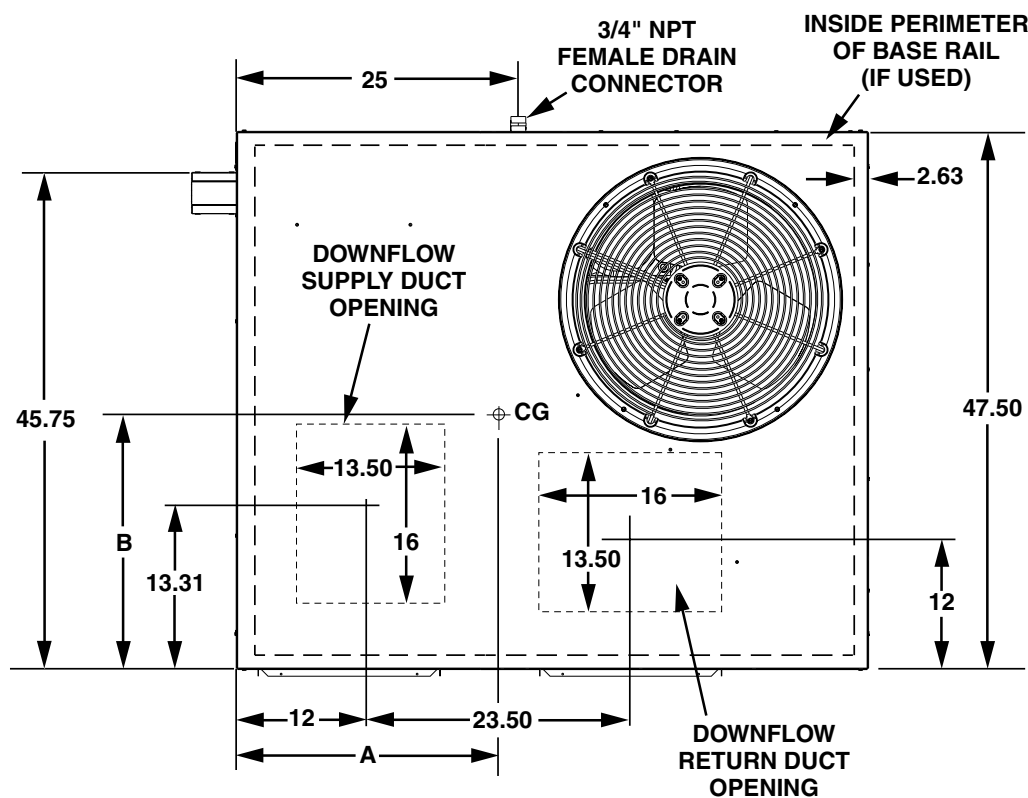


Top View


| Model Number<br>PPG3GE | Unit Weight | Shipping Weight | Center of Gravity |      | Height in inches (C) |                    |
|------------------------|-------------|-----------------|-------------------|------|----------------------|--------------------|
|                        |             |                 | A                 | B    | with base rails      | without base rails |
| 024K045†               | 397         | 413             | 26.5              | 26.5 | 35.0                 | 31.3               |
| 024K072†               | 405         | 421             | 26.0              | 26.5 | 35.0                 | 31.3               |
| 030K045†               | 398         | 414             | 26.5              | 26.5 | 35.0                 | 31.3               |
| 030K072†               | 406         | 422             | 26.0              | 26.5 | 35.0                 | 31.3               |
| 036K072†               | 403         | 419             | 26.5              | 26.5 | 35.0                 | 31.3               |
| 036K096†               | 411         | 427             | 26.5              | 26.5 | 35.0                 | 31.3               |
| 042K072†               | 435         | 453             | 27.0              | 26.5 | 39.0                 | 35.3               |
| 042K096†               | 443         | 461             | 27.0              | 26.5 | 39.0                 | 35.3               |
| 048K096†               | 453         | 470             | 27.5              | 26.5 | 39.0                 | 35.3               |
| 048K120†               | 461         | 478             | 27.5              | 26.5 | 39.0                 | 35.3               |
| X60K096†               | 472         | 489             | 27.5              | 26.5 | 43.0                 | 39.3               |
| X60K120†               | 480         | 497             | 27.5              | 26.5 | 43.0                 | 39.3               |

† Denotes "C" or "X"

# DIMENSIONS continued

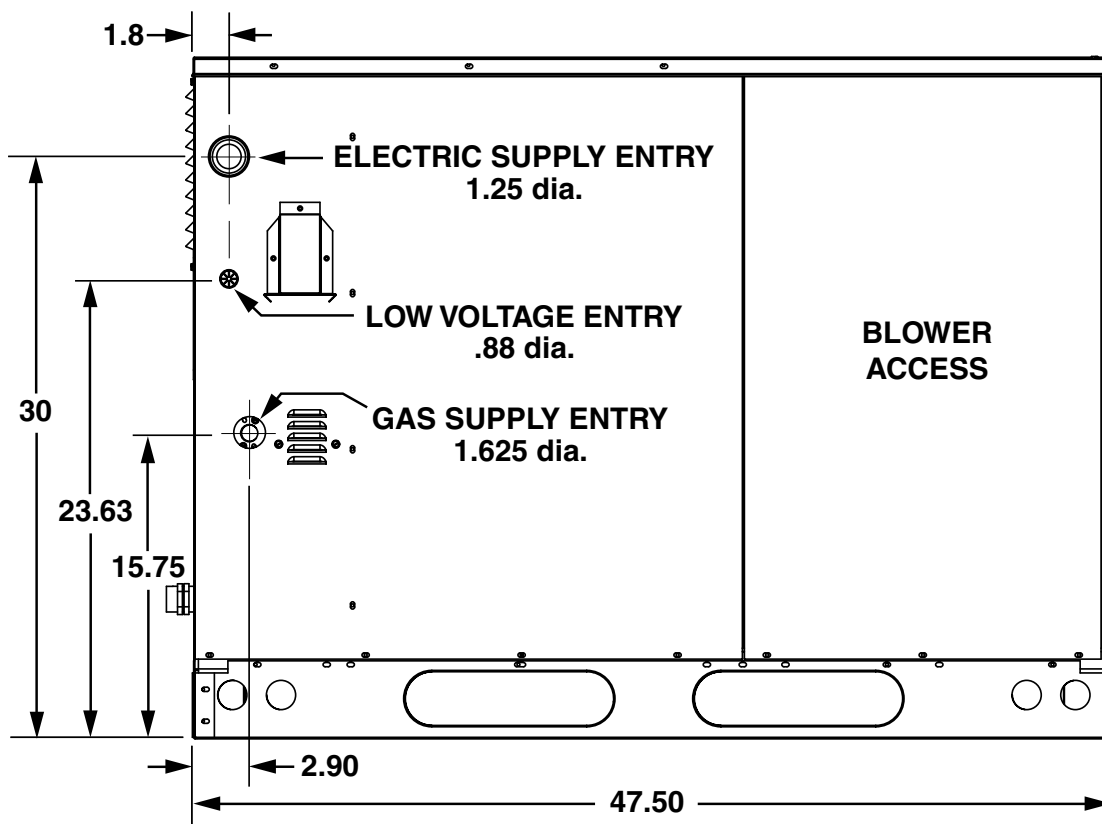

Side View

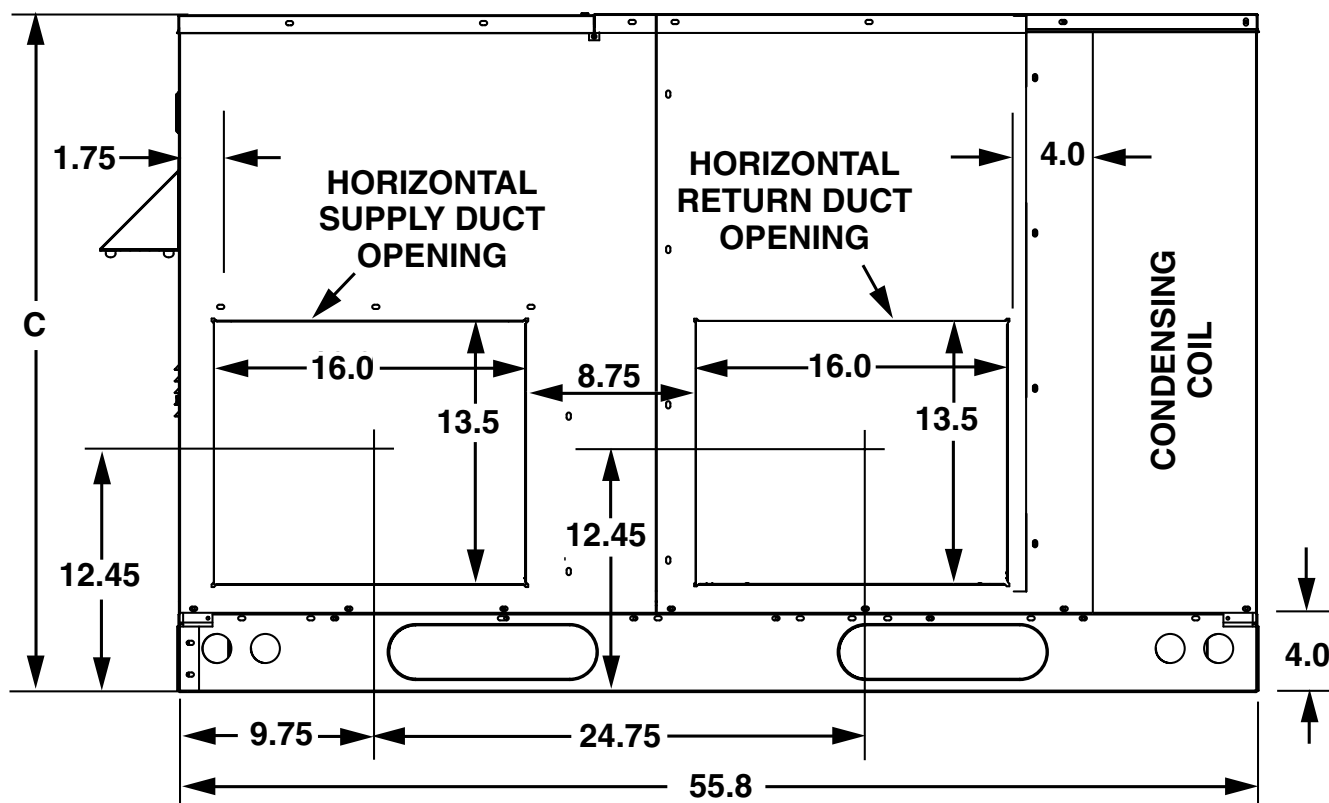

Back View

# SPECIFICATIONS AND ELECTRICAL DATA - SINGLE PHASE

| MODEL                            | PPG3GE       | -024K045(*)  | -024K072(*)  | -030K045(*)  | -030K072(*)  | -036K072(*)  | -042K072(*)  | -042K096(*)  | -048K120(*)  | -X60K096(*)  | -X60K120(*)  |
|----------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Performance</b>               |              |              |              |              |              |              |              |              |              |              |              |
| Heating Input Btuh               | 45,000       | 72,000       | 72,000       | 45,000       | 72,000       | 72,000       | 96,000       | 96,000       | 97,200       | 96,000       | 97,200       |
| Heating Output Btuh              | 36,450       | 58,320       | 58,320       | 36,450       | 58,320       | 58,320       | 77,760       | 77,760       | 96,000       | 76,760       | 96,000       |
| Capacity-Cooling Btuh            | 23,600       | 23,600       | 29,000       | 29,000       | 35,800       | 41,500       | 41,500       | 46,000       | 46,000       | 57,000       | 57,000       |
| AFUE                             | 81           | 81           | 81           | 81           | 81           | 81           | 81           | 81           | 81           | 81           | 81           |
| Efficiency -- SEER               | 14.0         | 14.0         | 14.0         | 14.0         | 14.0         | 14.0         | 14.0         | 14.0         | 14.0         | 14.0         | 14.0         |
| Efficiency -- EER                | 11.0         | 11.0         | 11.0         | 11.0         | 11.0         | 11.0         | 11.0         | 11.0         | 11.0         | 11.0         | 11.0         |
| <b>Electrical Rating - 60 Hz</b> |              |              |              |              |              |              |              |              |              |              |              |
| Phase                            | 1            | 1            | 1            | 1            | 1            | 1            | 1            | 1            | 1            | 1            | 1            |
| Operating Voltage Range          | 187 - 253    | 187 - 253    | 187 - 253    | 187 - 253    | 187 - 253    | 187 - 253    | 187 - 253    | 187 - 253    | 187 - 253    | 187 - 253    | 187 - 253    |
| Minimum Circuit Ampacity         | 20.6         | 20.6         | 24.7         | 24.7         | 28.3         | 34.1         | 34.1         | 34.1         | 36.8         | 44.6         | 44.6         |
| Max. Overcurrent Protection      | 30           | 30           | 40           | 40           | 45           | 50           | 50           | 50           | 60           | 70           | 70           |
| <b>Compressor Data</b>           |              |              |              |              |              |              |              |              |              |              |              |
| Volts                            | 208 / 230    | 208 / 230    | 208 / 230    | 208 / 230    | 208 / 230    | 208 / 230    | 208 / 230    | 208 / 230    | 208 / 230    | 208 / 230    | 208 / 230    |
| Rated Load Amps                  | 12.8         | 12.8         | 15.7         | 15.7         | 18.6         | 22.1         | 22.1         | 22.1         | 24.3         | 29.3         | 29.3         |
| Lock Rotor Amps                  | 58.3         | 58.3         | 73           | 73           | 79           | 109          | 109          | 109          | 117          | 134          | 134          |
| <b>Indoor Blower</b>             |              |              |              |              |              |              |              |              |              |              |              |
| Wheel Diameter                   | 11 x 10      | 11 x 10      | 11 x 10      | 11 x 10      | 11 x 10      | 11 x 10      | 11 x 10      | 11 x 10      | 11 x 10      | 11 x 10      | 11 x 10      |
| Motor Type                       | Fixed Torque | Fixed Torque | Fixed Torque | Fixed Torque | Fixed Torque | Fixed Torque | Fixed Torque | Fixed Torque | Fixed Torque | Fixed Torque | Fixed Torque |
| Motor HP                         | 1/2          | 1/2          | 1/2          | 1/2          | 1/2          | 3/4          | 3/4          | 3/4          | 3/4          | 1            | 1            |
| Motor Amps                       | 3.6          | 3.6          | 3.6          | 3.6          | 3.6          | 5.0          | 5.0          | 5.0          | 5.0          | 6.5          | 6.5          |
| <b>Outdoor Fan</b>               |              |              |              |              |              |              |              |              |              |              |              |
| Motor HP                         | 1/5          | 1/5          | 1/4          | 1/4          | 1/4          | 1/4          | 1/4          | 1/4          | 1/4          | 1/4          | 1/4          |
| Motor Amps                       | 1.0          | 1.0          | 1.46         | 1.46         | 1.46         | 1.46         | 1.46         | 1.46         | 1.46         | 1.46         | 1.46         |
| Fan Diameter/CFM                 | 20" / 3800   | 20" / 3800   | 20" / 3800   | 20" / 3800   | 20" / 3800   | 20" / 3800   | 20" / 3800   | 20" / 3800   | 20" / 3800   | 24" / 3800   | 24" / 3800   |
| Refrigerant Charge (oz)          | 60           | 60           | 61           | 61           | 60           | 69           | 69           | 69           | 69           | 72           | 72           |
| Sound Rating                     | 71           | 71           | 76           | 76           | 78           | 78           | 78           | 78           | 77           | 78           | 78           |

# AIRFLOW DATA

| External Static Pressure Drop - inches water column |                          |                           |                               |             |          |           |       |           |       |           |       |           |       |           |       |           |       |           |       |           |       |           |
|-----------------------------------------------------|--------------------------|---------------------------|-------------------------------|-------------|----------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|
| Model Number<br>PPG3GE                              | Heating Input<br>(Btu/h) | Heating Output<br>(Btu/h) | Heating Rise Range<br>(Btu/h) | Blower Size | Motor HP | Motor Tap | 0.1   |           | 0.2   |           | 0.3   |           | 0.4   |           | 0.5   |           | 0.6   |           | 0.7   |           | 0.8   |           |
|                                                     |                          |                           |                               |             |          |           | (cfm) | (°F) Rise | (cfm) | (°F) Rise | (cfm) | (°F) Rise | (cfm) | (°F) Rise | (cfm) | (°F) Rise | (cfm) | (°F) Rise | (cfm) | (°F) Rise | (cfm) | (°F) Rise |
| 024K045(†)                                          | 45,000                   | 36,000                    | 30-60                         | 11 x 10     | 1/2      | Tap T1    | 949   | 36        | 895   | 39        | 839   | 41        | 865   | 40        | 708   | 49        | 658   | 53        | 602   | 57        | 546   | 63        |
|                                                     |                          |                           |                               |             |          | Tap T2*   | 949   | 36        | 895   | 39        | 839   | 41        | 865   | 40        | 708   | 49        | 658   | 53        | 602   | 57        | 546   | 63        |
|                                                     |                          |                           |                               |             |          | Tap T3**  | 1084  | 32        | 1026  | 34        | 974   | 36        | 925   | 37        | 850   | 41        | 790   | 44        | 742   | 47        | 694   | 50        |
|                                                     |                          |                           |                               |             |          | Tap T4    | 1226  | 28        | 1155  | 30        | 1101  | 31        | 1034  | 33        | 963   | 36        | 897   | 39        | 827   | 42        | 762   | 45        |
|                                                     |                          |                           |                               |             |          | Tap T5    | 1525  | 23        | 1478  | 23        | 1432  | 24        | 1384  | 25        | 1336  | 26        | 1293  | 27        | 1244  | 28        | 1187  | 29        |
| 024K072(†)                                          | 72,000                   | 57,600                    | 40-70                         | 11 x 11     | 1/2      | Tap T1    | 949   | 58        | 895   | 62        | 839   | 66        | 865   | 64        | 708   | 78        | 658   | 84        | 602   | 92        | 546   | 101       |
|                                                     |                          |                           |                               |             |          | Tap T2*   | 949   | 58        | 895   | 62        | 839   | 66        | 865   | 64        | 708   | 78        | 658   | 84        | 602   | 92        | 546   | 101       |
|                                                     |                          |                           |                               |             |          | Tap T3    | 1084  | 51        | 1026  | 54        | 974   | 57        | 925   | 60        | 850   | 65        | 790   | 70        | 742   | 75        | 694   | 80        |
|                                                     |                          |                           |                               |             |          | Tap T4 ** | 1226  | 45        | 1155  | 48        | 1101  | 50        | 1034  | 54        | 963   | 57        | 897   | 62        | 827   | 67        | 762   | 73        |
|                                                     |                          |                           |                               |             |          | Tap T5    | 1525  | 36        | 1478  | 37        | 1432  | 39        | 1384  | 40        | 1336  | 41        | 1293  | 43        | 1244  | 44        | 1187  | 47        |
| 030K045(†)                                          | 45,000                   | 36,000                    | 30-60                         | 11 x 11     | 1/2      | Tap T1    | 949   | 36        | 895   | 39        | 839   | 41        | 865   | 40        | 708   | 49        | 658   | 53        | 602   | 57        | 546   | 63        |
|                                                     |                          |                           |                               |             |          | Tap T2**  | 949   | 36        | 895   | 39        | 839   | 41        | 865   | 40        | 708   | 49        | 658   | 53        | 602   | 57        | 546   | 63        |
|                                                     |                          |                           |                               |             |          | Tap T3 *  | 1084  | 32        | 1026  | 34        | 974   | 36        | 925   | 37        | 850   | 41        | 790   | 44        | 742   | 47        | 694   | 50        |
|                                                     |                          |                           |                               |             |          | Tap T4    | 1226  | 28        | 1155  | 30        | 1101  | 31        | 1034  | 33        | 963   | 36        | 897   | 39        | 827   | 42        | 762   | 45        |
|                                                     |                          |                           |                               |             |          | Tap T5    | 1525  | 23        | 1478  | 23        | 1432  | 24        | 1384  | 25        | 1336  | 26        | 1293  | 27        | 1244  | 28        | 1187  | 29        |
| 030K072(†)                                          | 72,000                   | 57,600                    | 40-70                         | 11 x 11     | 1/2      | Tap T1    | 949   | 58        | 895   | 62        | 839   | 66        | 865   | 64        | 708   | 78        | 658   | 84        | 602   | 92        | 546   | 101       |
|                                                     |                          |                           |                               |             |          | Tap T2    | 949   | 58        | 895   | 62        | 839   | 66        | 865   | 64        | 708   | 78        | 658   | 84        | 602   | 92        | 546   | 101       |
|                                                     |                          |                           |                               |             |          | Tap T3 *  | 1084  | 51        | 1026  | 54        | 974   | 57        | 925   | 60        | 850   | 65        | 790   | 70        | 742   | 75        | 694   | 80        |
|                                                     |                          |                           |                               |             |          | Tap T4 ** | 1226  | 45        | 1155  | 48        | 1101  | 50        | 1034  | 54        | 963   | 57        | 897   | 62        | 827   | 67        | 762   | 73        |
|                                                     |                          |                           |                               |             |          | Tap T5    | 1525  | 36        | 1478  | 37        | 1432  | 39        | 1384  | 40        | 1336  | 41        | 1293  | 43        | 1244  | 44        | 1187  | 47        |
| 036K072(†)                                          | 72000                    | 57600                     | 40-70                         | 11 x 11     | 1/2      | Tap T1    | 1085  | 51        | 1025  | 54        | 975   | 57        | 925   | 60        | 850   | 65        | 790   | 70        | 745   | 74        | 695   | 80        |
|                                                     |                          |                           |                               |             |          | Tap T2 ** | 1249  | 44        | 1185  | 47        | 1123  | 49        | 1065  | 52        | 979   | 57        | 908   | 61        | 858   | 64        | 800   | 69        |
|                                                     |                          |                           |                               |             |          | Tap T3*   | 1390  | 40        | 1310  | 42        | 1250  | 44        | 1185  | 47        | 1090  | 51        | 1010  | 55        | 955   | 58        | 890   | 62        |
|                                                     |                          |                           |                               |             |          | Tap T4    | 1495  | 37        | 1445  | 38        | 1400  | 40        | 1355  | 41        | 1305  | 42        | 1260  | 44        | 1210  | 46        | 1155  | 48        |
|                                                     |                          |                           |                               |             |          | Tap T5    | 1560  | 35        | 1515  | 37        | 1470  | 38        | 1420  | 39        | 1370  | 40        | 1325  | 42        | 1280  | 43        | 1225  | 45        |
| 036K096(†)                                          | 96,000                   | 76,800                    | 45-70                         | 11 x 10     | 1/2      | Tap T1    | 1085  | 68        | 1025  | 72        | 975   | 76        | 925   | 80        | 850   | 87        | 790   | 93        | 745   | 99        | 695   | 106       |
|                                                     |                          |                           |                               |             |          | Tap T2 *  | 1249  | 59        | 1185  | 62        | 1123  | 66        | 1065  | 69        | 979   | 75        | 908   | 81        | 858   | 86        | 800   | 92        |
|                                                     |                          |                           |                               |             |          | Tap T3**  | 1390  | 53        | 1310  | 56        | 1250  | 59        | 1185  | 62        | 1090  | 68        | 1010  | 73        | 955   | 77        | 890   | 83        |
|                                                     |                          |                           |                               |             |          | Tap T4    | 1495  | 49        | 1445  | 51        | 1400  | 53        | 1355  | 54        | 1305  | 57        | 1260  | 59        | 1210  | 61        | 1155  | 64        |
|                                                     |                          |                           |                               |             |          | Tap T5    | 1560  | 47        | 1515  | 49        | 1470  | 50        | 1420  | 52        | 1370  | 54        | 1325  | 56        | 1280  | 58        | 1225  | 60        |

\* Denotes factory set cooling speed

\*\* Denotes factory set heating speed

\*\*\* Denotes factory set cooling and heating speed

(t) Part number may contain a C or X.

Heat rise: Btu/h (Input) = CFM x Δ T x 1.08

Δ T = (Btu/h x 0.83) / (CFM x 1.08)

| External Static Pressure Drop - inches water column |                          |                           |                                  |                |             |              |       |              |       |              |       |              |       |              |       |              |       |              |       |              |       |              |
|-----------------------------------------------------|--------------------------|---------------------------|----------------------------------|----------------|-------------|--------------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|
| Model Number<br>PPG3GE                              | Heating Input<br>(Btu/h) | Heating Output<br>(Btu/h) | Heating Rise<br>Range<br>(Btu/h) | Blower<br>Size | Motor<br>HP | Motor<br>Tap | 0.1   |              | 0.2   |              | 0.3   |              | 0.4   |              | 0.5   |              | 0.6   |              | 0.7   |              | 0.8   |              |
|                                                     |                          |                           |                                  |                |             |              | (cfm) | (°F)<br>Rise | (cfm) | (°F)<br>Rise | (cfm) | (°F)<br>Rise | (cfm) | (°F)<br>Rise | (cfm) | (°F)<br>Rise | (cfm) | (°F)<br>Rise | (cfm) | (°F)<br>Rise | (cfm) | (°F)<br>Rise |
| 042K072(†)                                          | 72,000                   | 57,600                    | 35-65                            | 11 x 10        | 3/4         | Tap T1       | 1218  | 45           | 1031  | 54           | 944   | 59           | 868   | 64           | 782   | 71           | 710   | 78           | 643   | 86           | 583   | 95           |
|                                                     |                          |                           |                                  |                |             | Tap T2 **    | 1268  | 44           | 1207  | 46           | 1138  | 49           | 1048  | 53           | 982   | 56           | 918   | 60           | 832   | 67           | 771   | 72           |
|                                                     |                          |                           |                                  |                |             | Tap T3 *     | 1489  | 37           | 1439  | 38           | 1381  | 40           | 1319  | 42           | 1253  | 44           | 1172  | 47           | 1090  | 51           | 1019  | 54           |
|                                                     |                          |                           |                                  |                |             | Tap T4       | 1788  | 31           | 1740  | 32           | 1692  | 33           | 1511  | 37           | 1574  | 35           | 1511  | 37           | 1449  | 38           | 1389  | 40           |
|                                                     |                          |                           |                                  |                |             | Tap T5       | 1963  | 28           | 1912  | 29           | 1862  | 30           | 1698  | 33           | 1758  | 31           | 1698  | 33           | 1638  | 34           | 1577  | 35           |
| 042K096(†)                                          | 96,000                   | 76,800                    | 35-65                            | 11 x 10        | 3/4         | Tap T1       | 1218  | 61           | 1031  | 72           | 944   | 78           | 868   | 85           | 782   | 94           | 710   | 104          | 643   | 115          | 583   | 127          |
|                                                     |                          |                           |                                  |                |             | Tap T2       | 1268  | 58           | 1207  | 61           | 1138  | 65           | 1048  | 70           | 982   | 75           | 918   | 80           | 832   | 89           | 771   | 96           |
|                                                     |                          |                           |                                  |                |             | Tap T3 *     | 1489  | 50           | 1439  | 51           | 1381  | 53           | 1319  | 56           | 1253  | 59           | 1172  | 63           | 1090  | 68           | 1019  | 72           |
|                                                     |                          |                           |                                  |                |             | Tap T4 **    | 1788  | 41           | 1740  | 42           | 1692  | 44           | 1633  | 45           | 1574  | 47           | 1511  | 49           | 1449  | 51           | 1389  | 53           |
|                                                     |                          |                           |                                  |                |             | Tap T5       | 1963  | 38           | 1912  | 39           | 1862  | 40           | 1810  | 41           | 1758  | 42           | 1698  | 43           | 1638  | 45           | 1577  | 47           |
| 048K096(†)                                          | 96,000                   | 76,800                    | 35-65                            | 11 x 10        | 3/4         | Tap T1       | 1489  | 50           | 1439  | 51           | 1381  | 53           | 1319  | 56           | 1253  | 59           | 1172  | 63           | 1090  | 68           | 1019  | 72           |
|                                                     |                          |                           |                                  |                |             | Tap T2       | 1553  | 48           | 1495  | 49           | 1417  | 52           | 1386  | 53           | 1322  | 56           | 1265  | 58           | 1196  | 62           | 1113  | 66           |
|                                                     |                          |                           |                                  |                |             | Tap T3 **    | 1788  | 41           | 1740  | 42           | 1692  | 44           | 1633  | 45           | 1574  | 47           | 1511  | 49           | 1449  | 51           | 1389  | 53           |
|                                                     |                          |                           |                                  |                |             | Tap T4 *     | 1788  | 41           | 1740  | 42           | 1692  | 44           | 1633  | 45           | 1574  | 47           | 1511  | 49           | 1449  | 51           | 1389  | 53           |
|                                                     |                          |                           |                                  |                |             | Tap T5       | 2015  | 37           | 1970  | 37           | 1915  | 39           | 1870  | 39           | 1805  | 41           | 1740  | 42           | 1680  | 44           | 1630  | 45           |
| 048K120(†)                                          | 120,000                  | 96,000                    | 45-75                            | 11 x 10        | 3/4         | Tap T1       | 1489  | 62           | 1439  | 64           | 1381  | 67           | 1319  | 70           | 1253  | 74           | 1172  | 79           | 1090  | 85           | 1019  | 91           |
|                                                     |                          |                           |                                  |                |             | Tap T2 **    | 1553  | 59           | 1495  | 62           | 1417  | 65           | 1386  | 67           | 1322  | 70           | 1265  | 73           | 1196  | 77           | 1113  | 83           |
|                                                     |                          |                           |                                  |                |             | Tap T3       | 1788  | 52           | 1740  | 53           | 1692  | 55           | 1633  | 56           | 1574  | 59           | 1511  | 61           | 1449  | 64           | 1389  | 66           |
|                                                     |                          |                           |                                  |                |             | Tap T4 *     | 1788  | 52           | 1740  | 53           | 1692  | 55           | 1633  | 56           | 1574  | 59           | 1511  | 61           | 1449  | 64           | 1389  | 66           |
|                                                     |                          |                           |                                  |                |             | Tap T5       | 2015  | 46           | 1970  | 47           | 1915  | 48           | 1870  | 49           | 1805  | 51           | 1740  | 53           | 1680  | 55           | 1630  | 57           |
| 060K096(†)                                          | 96,000                   | 76,800                    | 35-65                            | 11 x 10        | 1           | Tap T1       | 1448  | 51           | 1383  | 53           | 1320  | 56           | 1244  | 59           | 1180  | 63           | 1094  | 67           | 1027  | 72           | 958   | 77           |
|                                                     |                          |                           |                                  |                |             | Tap T2 **    | 1635  | 45           | 1595  | 46           | 1510  | 49           | 1485  | 50           | 1425  | 52           | 1365  | 54           | 1305  | 57           | 1245  | 59           |
|                                                     |                          |                           |                                  |                |             | Tap T3       | 1839  | 40           | 1791  | 41           | 1699  | 43           | 1670  | 44           | 1600  | 46           | 1536  | 48           | 1469  | 50           | 1402  | 53           |
|                                                     |                          |                           |                                  |                |             | Tap T4 *     | 1900  | 39           | 1855  | 40           | 1795  | 41           | 1750  | 42           | 1700  | 43           | 1650  | 45           | 1595  | 46           | 1535  | 48           |
|                                                     |                          |                           |                                  |                |             | Tap T5       | 2202  | 34           | 2161  | 34           | 2104  | 35           | 2036  | 36           | 1974  | 37           | 1928  | 38           | 1872  | 39           | 1823  | 40           |
| 060K120(†)                                          | 120,000                  | 96,000                    | 45-75                            | 11 x 10        | 1           | Tap T1       | 1448  | 64           | 1383  | 67           | 1320  | 70           | 1244  | 74           | 1180  | 78           | 1094  | 84           | 1027  | 90           | 958   | 96           |
|                                                     |                          |                           |                                  |                |             | Tap T2       | 1635  | 56           | 1595  | 58           | 1510  | 61           | 1485  | 62           | 1425  | 65           | 1365  | 68           | 1305  | 71           | 1245  | 74           |
|                                                     |                          |                           |                                  |                |             | Tap T3 **    | 1839  | 50           | 1791  | 51           | 1699  | 54           | 1670  | 55           | 1600  | 58           | 1536  | 60           | 1469  | 63           | 1402  | 66           |
|                                                     |                          |                           |                                  |                |             | Tap T4 *     | 1900  | 49           | 1855  | 50           | 1795  | 51           | 1750  | 53           | 1700  | 54           | 1650  | 56           | 1595  | 58           | 1535  | 60           |
|                                                     |                          |                           |                                  |                |             | Tap T5       | 2202  | 42           | 2161  | 43           | 2104  | 44           | 2036  | 45           | 1974  | 47           | 1928  | 48           | 1872  | 49           | 1823  | 51           |

\* Denotes factory set cooling speed

\*\* Denotes factory set heating speed

\*\*\* Denotes factory set cooling and heating speed

(†) Part number may contain a C or X.

Heat rise: Btu/h (Input) = CFM x Δ T x 1.08

Δ T = (Btu/h x 0.83) / (CFM x 1.08)

# EXPANDED RATINGS

## PPG3GE-024K

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 750   | 80     | 62     | 25.7 | 21.3 | 1.34 | 24.7 | 20.8 | 1.48 | 23.3 | 20.1 | 1.66 | 21.5 | 19.2 | 1.87 | 19.4  | 18.2 | 2.1  | 17.0  | 17.0 | 2.37 |
|       | 80     | 67     | 27.1 | 18.4 | 1.35 | 26.2 | 18.3 | 1.5  | 24.9 | 18.0 | 1.67 | 23.3 | 17.5 | 1.87 | 21.3  | 16.9 | 2.11 | 18.9  | 16.1 | 2.38 |
|       | 80     | 72     | 29.0 | 12.3 | 1.37 | 28.2 | 12.5 | 1.51 | 27.1 | 12.6 | 1.68 | 25.6 | 12.5 | 1.89 | 23.7  | 12.2 | 2.12 | 21.5  | 11.8 | 2.39 |
|       | 75     | 62     | 24.2 | 17.0 | 1.33 | 23.6 | 16.9 | 1.47 | 22.7 | 16.6 | 1.65 | 21.4 | 16.2 | 1.86 | 19.7  | 15.7 | 2.1  | 17.7  | 15.0 | 2.36 |
| 850   | 80     | 62     | 26.7 | 21.7 | 1.38 | 25.6 | 21.2 | 1.52 | 24.2 | 20.5 | 1.7  | 22.5 | 19.6 | 1.9  | 20.4  | 18.6 | 2.14 | 17.9  | 17.4 | 2.41 |
|       | 80     | 67     | 28.0 | 18.9 | 1.39 | 27.1 | 18.7 | 1.53 | 25.8 | 18.4 | 1.71 | 23.6 | 17.9 | 1.91 | 22.2  | 17.3 | 2.15 | 19.9  | 16.5 | 2.41 |
|       | 80     | 72     | 30.0 | 12.7 | 1.41 | 29.2 | 13.0 | 1.55 | 28.0 | 13.0 | 1.72 | 26.5 | 12.9 | 1.93 | 24.7  | 12.7 | 2.16 | 22.5  | 12.3 | 2.42 |
|       | 75     | 62     | 25.2 | 17.4 | 1.37 | 24.6 | 17.3 | 1.51 | 23.6 | 17.1 | 1.69 | 22.3 | 16.7 | 1.9  | 20.7  | 16.1 | 2.13 | 18.7  | 15.4 | 2.4  |
| 950   | 80     | 62     | 26.7 | 22.6 | 1.41 | 25.7 | 22.0 | 1.55 | 24.3 | 21.3 | 1.73 | 22.6 | 20.5 | 1.93 | 20.4  | 19.5 | 2.17 | 18.0  | 18.0 | 2.44 |
|       | 80     | 67     | 28.1 | 19.7 | 1.42 | 27.2 | 19.6 | 1.56 | 25.9 | 19.3 | 1.74 | 24.3 | 18.8 | 1.94 | 22.3  | 18.1 | 2.18 | 20.0  | 17.3 | 2.44 |
|       | 80     | 72     | 30.0 | 13.6 | 1.44 | 29.3 | 13.8 | 1.58 | 28.1 | 13.9 | 1.75 | 26.6 | 13.8 | 1.96 | 24.8  | 13.5 | 2.19 | 22.5  | 13.1 | 2.45 |
|       | 75     | 62     | 25.2 | 18.2 | 1.4  | 24.6 | 18.2 | 1.54 | 23.7 | 17.9 | 1.72 | 22.4 | 17.5 | 1.93 | 20.8  | 17.0 | 2.16 | 18.8  | 16.2 | 2.43 |

## PPG3GE-030K

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 1000  | 80     | 62     | 31.9 | 26.5 | 1.7  | 31.1 | 26.2 | 1.85 | 29.7 | 25.6 | 2.05 | 27.7 | 24.8 | 2.27 | 25    | 23.7 | 2.54 | 21.7  | 21.7 | 2.84 |
|       | 80     | 67     | 32.6 | 23.4 | 1.71 | 32.4 | 23.5 | 1.87 | 31.5 | 23.4 | 2.07 | 30   | 22.9 | 2.31 | 27.8  | 22.2 | 2.58 | 25.0  | 21.2 | 2.89 |
|       | 80     | 72     | 34.2 | 14.4 | 1.74 | 34.5 | 14.9 | 1.91 | 34.2 | 15.2 | 2.12 | 33.2 | 15.1 | 2.36 | 31.5  | 14.8 | 2.65 | 29.2  | 14.2 | 2.96 |
|       | 75     | 62     | 31.3 | 22.9 | 1.71 | 30.4 | 22.7 | 1.86 | 29.0 | 22.3 | 2.04 | 26.8 | 21.5 | 2.27 | 24.1  | 20.5 | 2.53 | 20.6  | 19.2 | 2.82 |
| 1100  | 80     | 62     | 32.0 | 26.2 | 1.76 | 31.2 | 25.9 | 1.92 | 29.8 | 25.4 | 2.11 | 27.8 | 24.5 | 2.34 | 25.1  | 23.4 | 2.6  | 21.8  | 21.8 | 2.9  |
|       | 80     | 67     | 32.7 | 23.2 | 1.77 | 32.5 | 23.3 | 1.94 | 31.6 | 23.1 | 2.13 | 29.0 | 22.7 | 2.37 | 28.0  | 22.0 | 2.64 | 25.1  | 21.0 | 2.95 |
|       | 80     | 72     | 34.4 | 14.2 | 1.81 | 34.7 | 14.7 | 1.98 | 34.3 | 14.9 | 2.18 | 33.3 | 14.9 | 2.43 | 31.7  | 14.5 | 2.71 | 29.4  | 13.9 | 3.03 |
|       | 75     | 62     | 31.4 | 22.7 | 1.77 | 30.6 | 22.5 | 1.92 | 29.1 | 22   | 2.11 | 27.0 | 21.3 | 2.33 | 24.2  | 20.3 | 2.59 | 20.8  | 19.0 | 2.88 |
| 1200  | 80     | 62     | 32.4 | 26.6 | 1.83 | 31.7 | 26.4 | 1.98 | 30.3 | 25.8 | 2.17 | 28.2 | 25.0 | 2.4  | 25.6  | 23.9 | 2.66 | 22.2  | 22.2 | 2.97 |
|       | 80     | 67     | 33.2 | 23.6 | 1.84 | 32.9 | 23.7 | 2.0  | 32.1 | 23.5 | 2.2  | 30.5 | 23.1 | 2.43 | 28.4  | 22.4 | 2.71 | 25.6  | 21.4 | 3.02 |
|       | 80     | 72     | 34.8 | 14.6 | 1.87 | 35.1 | 15.1 | 2.04 | 34.7 | 15.4 | 2.24 | 33.7 | 15.3 | 2.49 | 32.1  | 15   | 2.77 | 29.8  | 14.4 | 3.09 |
|       | 75     | 62     | 31.8 | 23.1 | 1.83 | 31.0 | 22.9 | 1.98 | 29.5 | 22.5 | 2.17 | 27.4 | 21.7 | 2.39 | 24.6  | 20.7 | 2.65 | 21.2  | 19.4 | 2.95 |

## PPG3GE-036K

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 1050  | 80     | 62     | 37.9 | 31.4 | 2.1  | 36.2 | 31   | 2.29 | 34.3 | 30.4 | 2.53 | 32   | 29.3 | 2.83 | 29.6  | 27.9 | 3.18 | 26.8  | 26.2 | 3.58 |
|       | 80     | 67     | 40.3 | 23.9 | 2.15 | 38.5 | 24   | 2.33 | 36.4 | 23.8 | 2.57 | 34.1 | 23.2 | 2.86 | 31.5  | 22.2 | 3.2  | 28.6  | 20.9 | 3.6  |
|       | 80     | 72     | 43.9 | 15.5 | 2.18 | 42.0 | 16.1 | 2.36 | 39.8 | 16.3 | 2.59 | 37.4 | 16.1 | 2.87 | 34.7  | 15.6 | 3.21 | 31.7  | 14.7 | 3.6  |
|       | 75     | 62     | 44.5 | 29.9 | 1.86 | 41.1 | 28.7 | 2.1  | 37.5 | 27.2 | 2.39 | 33.6 | 25.4 | 2.74 | 29.4  | 23.2 | 3.14 | 25.0  | 20.6 | 3.59 |
| 1200  | 80     | 62     | 39.7 | 33.7 | 2.13 | 38   | 33.4 | 2.32 | 36.1 | 32.7 | 2.56 | 33.8 | 31.7 | 2.86 | 31.3  | 30.3 | 3.21 | 28.6  | 28.6 | 3.61 |
|       | 80     | 67     | 42.1 | 26.3 | 2.18 | 40.3 | 26.4 | 2.36 | 38.2 | 26.2 | 2.59 | 35.8 | 25.6 | 2.88 | 33.3  | 24.6 | 3.23 | 30.4  | 23.3 | 3.62 |
|       | 80     | 72     | 45.7 | 17.9 | 2.21 | 43.8 | 18.4 | 2.39 | 41.6 | 18.6 | 2.61 | 39.2 | 18.4 | 2.9  | 36.5  | 17.9 | 3.23 | 33.5  | 17.1 | 3.62 |
|       | 75     | 62     | 46.3 | 32.3 | 1.89 | 42.9 | 31.1 | 2.13 | 39.3 | 29.6 | 2.42 | 35.4 | 27.7 | 2.76 | 31.2  | 25.5 | 3.16 | 26.8  | 23.0 | 3.62 |
| 1350  | 80     | 62     | 40.7 | 35.3 | 2.18 | 39.0 | 34.9 | 2.37 | 37.0 | 34.2 | 2.61 | 34.8 | 33.2 | 2.91 | 32.3  | 31.8 | 3.26 | 29.6  | 29.6 | 3.66 |
|       | 80     | 67     | 43.1 | 27.8 | 2.23 | 41.2 | 27.9 | 2.41 | 39.2 | 27.7 | 2.65 | 36.9 | 27.1 | 2.94 | 34.3  | 26.1 | 3.28 | 31.4  | 24.8 | 3.68 |
|       | 80     | 72     | 46.7 | 19.4 | 2.26 | 44.8 | 20.0 | 2.44 | 42.6 | 20.1 | 2.67 | 40.2 | 20.0 | 2.95 | 37.5  | 19.4 | 3.29 | 34.5  | 18.6 | 3.68 |
|       | 75     | 62     | 47.3 | 33.8 | 1.94 | 43.9 | 32.6 | 2.18 | 40.3 | 31.1 | 2.47 | 36.4 | 29.2 | 2.82 | 32.2  | 27   | 3.22 | 27.8  | 24.5 | 3.67 |

## PPG3GE-042K

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 1200  | 80     | 62     | 44.5 | 36.2 | 2.44 | 42.1 | 35.2 | 2.68 | 39.5 | 33.9 | 2.98 | 36.5 | 32.2 | 3.34 | 33.3  | 30.3 | 3.75 | 29.8  | 28   | 4.21 |
|       | 80     | 67     | 48.4 | 29.7 | 2.48 | 45.9 | 29.0 | 2.73 | 43.2 | 28   | 3.04 | 40.1 | 26.6 | 3.4  | 36.8  | 25   | 3.81 | 33.2  | 23.1 | 4.28 |
|       | 80     | 72     | 53.2 | 21.9 | 2.53 | 50.6 | 21.5 | 2.78 | 47.8 | 20.9 | 3.09 | 44.6 | 19.9 | 3.45 | 41.2  | 18.5 | 3.87 | 37.5  | 16.9 | 4.34 |
|       | 75     | 62     | 44.3 | 30.6 | 2.47 | 41.8 | 29.7 | 2.7  | 39.1 | 28.4 | 2.99 | 36.0 | 26.8 | 3.34 | 32.7  | 24.8 | 3.74 | 29.1  | 22.6 | 4.19 |
| 1350  | 80     | 62     | 45.3 | 37.8 | 2.55 | 42.9 | 36.8 | 2.79 | 40.3 | 35.4 | 3.09 | 37.4 | 33.8 | 3.45 | 34.2  | 31.8 | 3.86 | 30.7  | 29.6 | 4.32 |
|       | 80     | 67     | 49.2 | 31.2 | 2.59 | 46.7 | 30.5 | 2.84 | 44.0 | 29.5 | 3.15 | 41.5 | 28.2 | 3.51 | 37.6  | 26.6 | 3.92 | 34.0  | 24.6 | 4.38 |
|       | 80     | 72     | 54.0 | 23.5 | 2.64 | 51.5 | 23.1 | 2.89 | 48.6 | 22.4 | 3.2  | 45.5 | 21.4 | 3.56 | 42.0  | 20.1 | 3.98 | 38.3  | 18.5 | 4.45 |
|       | 75     | 62     | 45.1 | 32.2 | 2.58 | 42.6 | 31.2 | 2.81 | 39.9 | 29.9 | 3.1  | 36.9 | 28.3 | 3.45 | 33.5  | 26.4 | 3.85 | 29.9  | 24.2 | 4.3  |
| 1500  | 80     | 62     | 45.3 | 38.8 | 2.74 | 42.9 | 37.8 | 2.99 | 40.3 | 36.5 | 3.29 | 37.4 | 34.8 | 3.64 | 34.2  | 32.9 | 4.05 | 30.7  | 30.6 | 4.52 |
|       | 80     | 67     | 49.2 | 32.3 | 2.79 | 46.8 | 31.6 | 3.04 | 44.0 | 30.6 | 3.34 | 41.0 | 29.3 | 3.7  | 37.6  | 27.6 | 4.11 | 34.0  | 25.7 | 4.58 |
|       | 80     | 72     | 54.0 | 24.5 | 2.83 | 51.5 | 24.2 | 3.09 | 48.6 | 23.5 | 3.39 | 45.5 | 22.5 | 3.75 | 42.0  | 21.2 | 4.17 | 38.3  | 19.5 | 4.64 |
|       | 75     | 62     | 45.1 | 33.3 | 2.77 | 42.7 | 32.3 | 3.01 | 39.9 | 31   | 3.3  | 36.9 | 29.4 | 3.64 | 33.6  | 27.5 | 4.04 | 29.9  | 25.2 | 4.49 |

# EXPANDED RATINGS (Continued)

## PPG3GE-048K

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 1450  | 80     | 62     | 51.3 | 38.4 | 2.74 | 48.8 | 41.5 | 3.01 | 45.9 | 43   | 3.35 | 42.6 | 42.6 | 3.75 | 38.8  | 38.8 | 4.22 | 34.6  | 34.6 | 4.75 |
|       | 80     | 67     | 55.1 | 27.3 | 2.79 | 52.7 | 29.0 | 3.06 | 49.9 | 29.1 | 3.39 | 46.6 | 27.6 | 3.79 | 42.9  | 24.5 | 4.26 | 38.7  | 19.8 | 4.79 |
|       | 80     | 72     | 59.3 | 21.7 | 2.86 | 57.0 | 22.0 | 3.13 | 54.2 | 20.7 | 3.46 | 51.0 | 17.8 | 3.86 | 47.4  | 13.3 | 4.33 | 43.3  | 7.28 | 4.85 |
|       | 75     | 62     | 50.8 | 30.5 | 2.74 | 48.2 | 32.1 | 3.02 | 45.1 | 32.2 | 3.36 | 41.6 | 30.7 | 3.77 | 37.7  | 27.6 | 4.25 | 33.3  | 22.9 | 4.79 |
| 1650  | 80     | 62     | 51.9 | 45.4 | 2.93 | 49.4 | 48.5 | 3.2  | 46.6 | 46.6 | 3.53 | 43.2 | 43.2 | 3.94 | 39.4  | 39.4 | 4.4  | 35.2  | 35.2 | 4.93 |
|       | 80     | 67     | 55.7 | 34.3 | 2.97 | 53.3 | 36.0 | 3.24 | 50.5 | 36.1 | 3.58 | 46.0 | 34.6 | 3.98 | 43.5  | 31.5 | 4.44 | 39.4  | 26.8 | 4.97 |
|       | 80     | 72     | 59.9 | 28.7 | 3.05 | 57.6 | 29.0 | 3.32 | 54.8 | 27.7 | 3.65 | 51.6 | 24.8 | 4.05 | 48.0  | 20.3 | 4.51 | 43.9  | 14.3 | 5.04 |
|       | 75     | 62     | 51.4 | 37.5 | 2.92 | 48.8 | 39.1 | 3.2  | 45.8 | 39.2 | 3.55 | 42.3 | 37.7 | 3.96 | 38.3  | 34.6 | 4.43 | 33.9  | 29.9 | 4.97 |
| 1850  | 80     | 62     | 50.7 | 50.7 | 3.23 | 48.3 | 48.3 | 3.51 | 45.4 | 45.4 | 3.84 | 42.1 | 42.1 | 4.24 | 38.3  | 38.3 | 4.71 | 34.1  | 34.1 | 5.24 |
|       | 80     | 67     | 54.6 | 41.3 | 3.28 | 52.2 | 43.0 | 3.55 | 49.4 | 43.1 | 3.89 | 46.1 | 41.6 | 4.29 | 42.4  | 38.5 | 4.75 | 38.2  | 33.8 | 5.28 |
|       | 80     | 72     | 58.8 | 35.7 | 3.35 | 56.4 | 36.0 | 3.62 | 53.7 | 34.7 | 3.96 | 50.5 | 31.8 | 4.36 | 46.8  | 27.3 | 4.82 | 42.8  | 21.3 | 5.35 |
|       | 75     | 62     | 50.3 | 44.5 | 3.23 | 47.7 | 46.1 | 3.51 | 44.6 | 44.6 | 3.86 | 41.1 | 41.1 | 4.27 | 37.2  | 37.2 | 4.74 | 32.8  | 32.8 | 5.28 |

## PPG3GE-060K

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 1500  | 80     | 62     | 60.7 | 49.0 | 3.44 | 58.4 | 47.3 | 3.8  | 55.5 | 45.5 | 4.24 | 52.1 | 43.6 | 4.77 | 48.1  | 41.5 | 5.38 | 43.4  | 39.4 | 6.08 |
|       | 80     | 67     | 67.7 | 44.1 | 3.55 | 64.9 | 42.5 | 3.91 | 61.6 | 40.7 | 4.36 | 57.7 | 38.9 | 4.89 | 53.2  | 36.9 | 5.51 | 48.2  | 34.7 | 6.21 |
|       | 80     | 72     | 73.0 | 34.9 | 3.54 | 69.8 | 33.3 | 3.91 | 66.0 | 31.6 | 4.36 | 61.6 | 29.8 | 4.89 | 56.7  | 27.8 | 5.51 | 51.2  | 25.7 | 6.21 |
|       | 75     | 62     | 60.4 | 37.8 | 3.15 | 57.8 | 37.0 | 3.57 | 54.7 | 36.0 | 4.08 | 51.0 | 34.9 | 4.67 | 46.7  | 33.7 | 5.34 | 41.9  | 32.3 | 6.09 |
| 1700  | 80     | 62     | 60.7 | 49.3 | 3.52 | 58.4 | 47.7 | 3.89 | 55.5 | 45.9 | 4.33 | 52.0 | 43.9 | 4.86 | 48.0  | 41.9 | 5.47 | 43.4  | 39.7 | 6.17 |
|       | 80     | 67     | 67.6 | 44.4 | 3.64 | 64.9 | 42.8 | 4.0  | 61.6 | 41.1 | 4.45 | 57.0 | 39.2 | 4.98 | 53.2  | 37.2 | 5.6  | 48.1  | 35.0 | 6.3  |
|       | 80     | 72     | 72.9 | 35.2 | 3.63 | 69.7 | 33.6 | 4.0  | 65.9 | 31.9 | 4.45 | 61.6 | 30.1 | 4.98 | 56.6  | 28.2 | 5.6  | 51.1  | 26.1 | 6.3  |
|       | 75     | 62     | 60.4 | 38.2 | 3.24 | 57.8 | 37.3 | 3.66 | 54.7 | 36.4 | 4.17 | 51.0 | 35.2 | 4.75 | 46.7  | 34.0 | 5.43 | 41.8  | 32.7 | 6.18 |
| 1900  | 80     | 62     | 63.4 | 51.1 | 3.68 | 61.0 | 49.4 | 4.04 | 58.2 | 47.6 | 4.48 | 54.7 | 45.7 | 5.01 | 50.7  | 43.6 | 5.62 | 46.1  | 41.4 | 6.32 |
|       | 80     | 67     | 70.3 | 46.2 | 3.79 | 67.6 | 44.5 | 4.15 | 64.2 | 42.8 | 4.6  | 60.3 | 40.9 | 5.13 | 55.8  | 38.9 | 5.75 | 50.8  | 36.8 | 6.45 |
|       | 80     | 72     | 75.6 | 36.9 | 3.78 | 72.4 | 35.4 | 4.15 | 68.6 | 33.7 | 4.6  | 64.2 | 31.8 | 5.13 | 59.3  | 29.9 | 5.75 | 53.8  | 27.8 | 6.45 |
|       | 75     | 62     | 63   | 39.9 | 3.39 | 60.5 | 39.1 | 3.81 | 57.3 | 38.1 | 4.32 | 53.6 | 37.0 | 4.9  | 49.3  | 35.8 | 5.58 | 44.5  | 34.4 | 6.33 |

## ACCESSORIES

| Description                                                                                       | Part Number |
|---------------------------------------------------------------------------------------------------|-------------|
| Roof Curb (8")                                                                                    | 547830      |
| Roof Curb (14")                                                                                   | 547831      |
| Roof Curb (18")                                                                                   | 547850      |
| Roof Curb (24")                                                                                   | 547851      |
| Cap, Duct Adapter, 12" Round                                                                      | 913811A     |
| Cap, Duct Adapter, 14" Round                                                                      | 913812A     |
| Supply/return transition, 16"                                                                     | 547834      |
| Supply/return transition, 18"                                                                     | 547835      |
| Concentric diffuser, flush, 16"                                                                   | 547836      |
| Concentric diffuser, flush, 18"                                                                   | 547837      |
| Concentric diffuser, step down 16"                                                                | 547838      |
| Concentric diffuser, step down 18"                                                                | 547839      |
| Manual Fresh Air Damper                                                                           | 547832      |
| Motorized Fresh Air Damper                                                                        | 547840      |
| Economizer, Downflow, Modulating w/filter (does not require filter kit) 2 - 3 Ton                 | 547833      |
| Economizer, Downflow, Modulating w/filter (does not require filter kit) 3.5 - 5 Ton               | 558870      |
| Economizer, Horizontal, Modulating 2 - 5 Ton                                                      | 547841      |
| Power Exhaust, Downflow (application requires downflow economizer) (Special Order)                | 547842      |
| Power Exhaust, Horizontal (application requires horizontal economizer) (Special Order)            | 547843      |
| Filter Kit PPG3GE 2 - 3 Ton                                                                       | 547887      |
| Filter Kit PPG3GE 3.5 - 4 Ton                                                                     | 547888      |
| Filter Kit PPG3GE 5 Ton                                                                           | 547889      |
| Filter Kit, All Downflow Applications (not required with economizer)                              | 547885      |
| Hood Type Hail Guard, Coil Dim. 30" X 76" 2, 2.5, 3 Ton                                           | 547845      |
| Hood Type Hail Guard, Coil Dim. 34" X 76" 3.5 - 4 Ton                                             | 547846      |
| Hood Type Hail Guard, Coil Dim. 38" X 76" 5 Ton                                                   | 547847      |
| Duct Smoke Detector Photo Elec                                                                    | 558863      |
| Multi Signal Control                                                                              | 558866      |
| Sampling Tube DST3, 2-4ft                                                                         | 558864      |
| Sampling Tube DST5, 4-8ft                                                                         | 558865      |
| Low Ambient Kit                                                                                   | 918837      |
| U.S. - LP Gas/High Elevation Conversion Kit, 1 & 2 Stage models (0 - 10,000 ft. above sea level)  | 904404A     |
| Canada - LP Gas/High Elevation Conversion Kit, 1 & 2 Stage models (0 - 4,500 ft. above sea level) | 904405A     |
| Universal Hard Start Kit                                                                          | 912933      |
| Skirt Trim Kit                                                                                    | 919729      |
| Freezestat Kit                                                                                    | 917108      |
| Control, CO2 Sensor                                                                               | 547848      |



**MAYTAG**

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ®Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2015. All rights reserved.

286E-0115 (Replaces 286E-1014)

Printed in U.S.A. (01/15)