



TECHNICAL SPECIFICATIONS

Model PPH1SE Series



M1200 Product Line

**Single Packaged Heat Pump
14 SEER - 2 - 5 Ton Units**

- **M1200 – 12 YEAR ALL PARTS LIMITED WARRANTY**
- **M1200 WITH UPGRADED WARRANTY PACKAGE - 12 YEAR ALL PARTS & LABOR LIMITED WARRANTY**
- **Both the standard and upgraded limited warranty packages offer a 12 Year Dependability Promise to replace the entire unit, if the unit's major component (heat exchanger or compressor) fails within the first 12 years of operation, to the original owner.**
- **Product registration (by consumer or dealer) required for 12-year Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.**
- **Dealer is responsible for registration of labor portion of warranty.**




The PPH1SE Series single packaged heat pumps are high efficiency self contained cooling and heating units that can be installed on a roof or on a slab. The convertible unit design makes installations simple in all applications. Units are ETL and ETLc listed.

Features and Benefits

- **Copeland Ultra-Tech Scroll Compressor:** State of the art 2 stage scroll compressor is standard equipment.
- **Quiet Operation and Low Vibration:** Compressor sound blanket is standard. Swept-wing fan blade combined with custom Venturi condenser fan.
- **R-410A Refrigerant:** Earth friendly non-ozone depleting refrigerant.
- **Wire guard coated with Earth Friendly Epoxy and plastic mesh hail guard:** A guard that will never rust and protects the units coil from being damaged.
- **Copper Tube / Aluminum Fin Coils:** Both indoor and outdoor coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Designed using Galvanized Steel:** with a polyester urethane coat finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.
- **One Piece Top, Great Fit and Finish, Total Seal:** Well-designed, quality construction. Drip edge on top panels whisks away rainwater. Embossed bottom pan keeps blower component compartment dry.
- **Permanently Lubricated Condenser Motor:** A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Thermostatic Expansion Valves:** Factory installed externally equalized thermostatic expansion valves provides precise refrigerant control under varying load conditions.
- **Hi/Low Pressure Switches:** Ensure long compressor life.
- **Externally Accessible, High Flow Service Ports:** Quick access to refrigeration system.
- **Liquid Line Filter Driers:** Factory installed at a convenient location for service.
- **Suction Accumulator:** Protection from liquid flood back and future compressor failures.
- **Low voltage Transformer:** Includes 3 Amp fuse to protect low voltage circuit.
- **Corrosion-Resistant Drain Pan:** Quickly drains away evaporator condensate.
- **ECM Variable Speed Blower Motor:** Advanced technology allows the motor to automatically adjust to different static loads. The variable speed motor allows for extra quiet operation and improved air quality.
- **Demand Defrost Standard:** Provides additional energy savings in heating by defrosting only when necessary.
- **Three Minute Restart Time Delay:** When the unit shuts down, a three minute delay keeps the unit from restarting, eliminating the highest cause for compressor failure.
- **Heavy-Gauge, Full Perimeter Base Rails:** Facilitates forklift handling and curb mounting.
- **Convertible Air Delivery:** Horizontal or downflow to accommodate roof-top or horizontal applications.
- **Easy Compressor and Control Access:** Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Easy access:** to the evaporator coil for cleaning and general maintenance.
- **Removable Top Grille Assembly:** Allows ease of service to the fan motor.
- **Duct Flanges:** reduce installation costs.
- **Optional Electric Heat:** Field installed 5 – 20 KW.
- **Proven, Industry Standard Components:** Easier service and availability.


IDENTIFICATION CODE

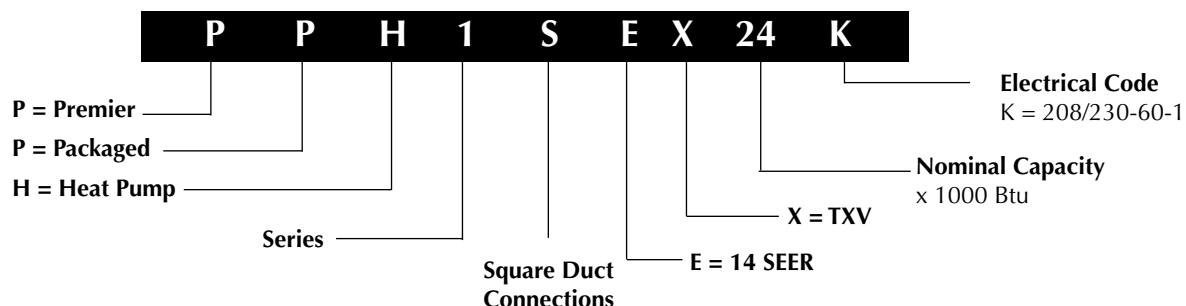

SPECIFICATIONS

Model Number	PPH1SE			
	X24K	X36K	X48K	X60K
Performance				
Capacity - Heating BTUH	22,200	33,000	42,500	55,500
Efficiency - HSPF	8.0	8.0	8.0	8.0
Capacity - Cooling BTUH	23,600	34,000	44,000	56,500
Efficiency - SEER	14.20	14.00	14.50	14.00
EER (Btuh/watt)	11.0	11.0	11.0	11.0
Electrical Rating - 60 Hz				
Phase	1	1	1	1
Operating Voltage Range	187-253	187-253	187-253	187-253
Compressor Data				
Volts	208-230	208-230	208-230	208-230
Rated Load Amps	11.4	19.0	24.0	26.0
Lock Rotor Amps	52	82	96	118
Indoor Blower				
Type	Var. Sp.	Var. Sp.	Var. Sp.	Var. Sp.
Motor HP	1/2	1/2	3/4	3/4
Motor RPM Range	490-740	490-740	645-950	645-950
Motor - Amps	4.3	4.3	6.8	6.8
Outdoor Fan				
Motor - HP / RPM	1/4 - 825	1/4 - 1100	1/4 - 1100	1/3 - 1000
Motor - Amps	1.4	1.2	1.2	1.5
Fan Diameter / CFM	20 / 3200	20 / 3800	20 / 3800	20 / 4000
Refrigerant Charge - Oz.				
Net Weight lbs.	112.0	126.4	264	236.8
Shipping weight lbs.	450	460	570	580
	460	470	580	590



DIMENSIONS

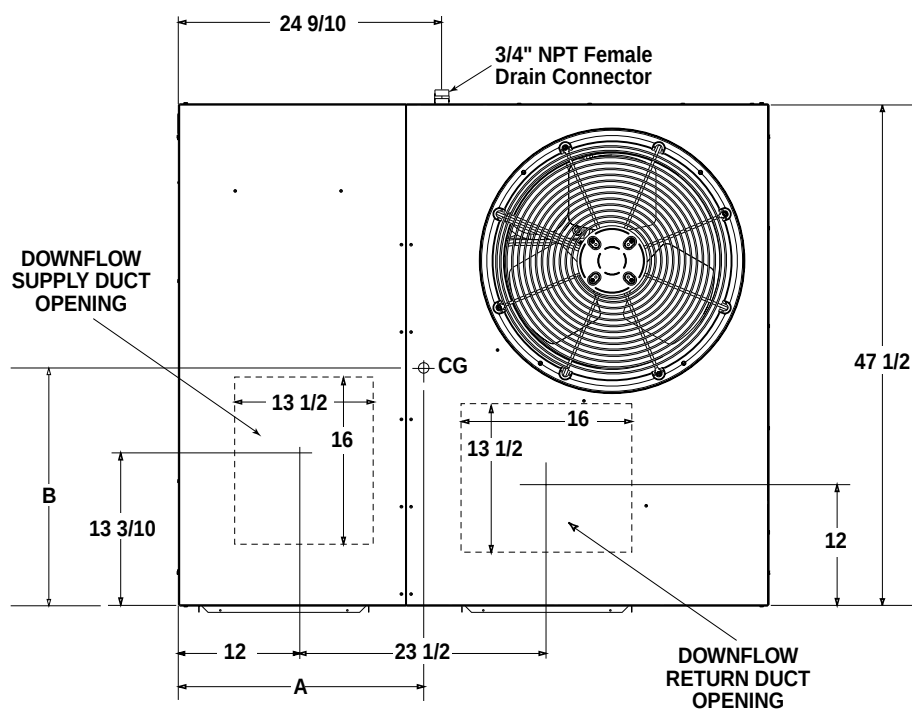

Top View

Model Number PPH1SE	Unit Weight	Center of Gravity		Height (in inches)	
		A	B	C	
				with base rails	without base rails
X24	450	28.0	25.5	39.0	35.3
X36	460	28.0	25.5	39.0	35.3
X48	570	29.5	26.0	43.0	39.3
X60	580	29.5	26.0	43.0	39.3

DIMENSIONS continued

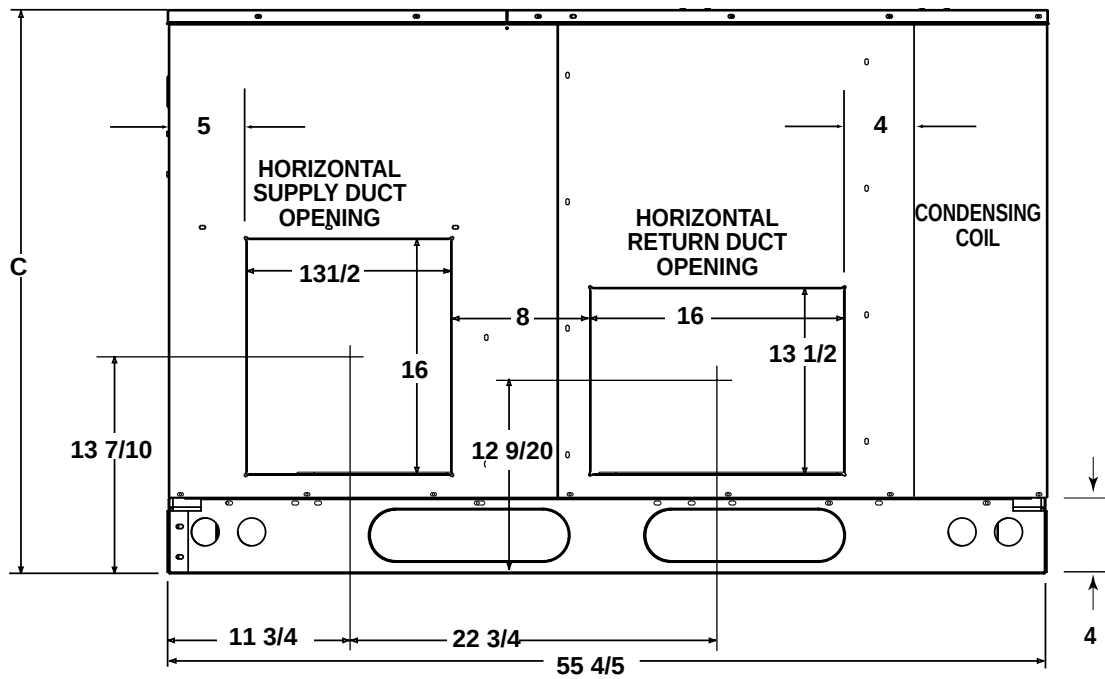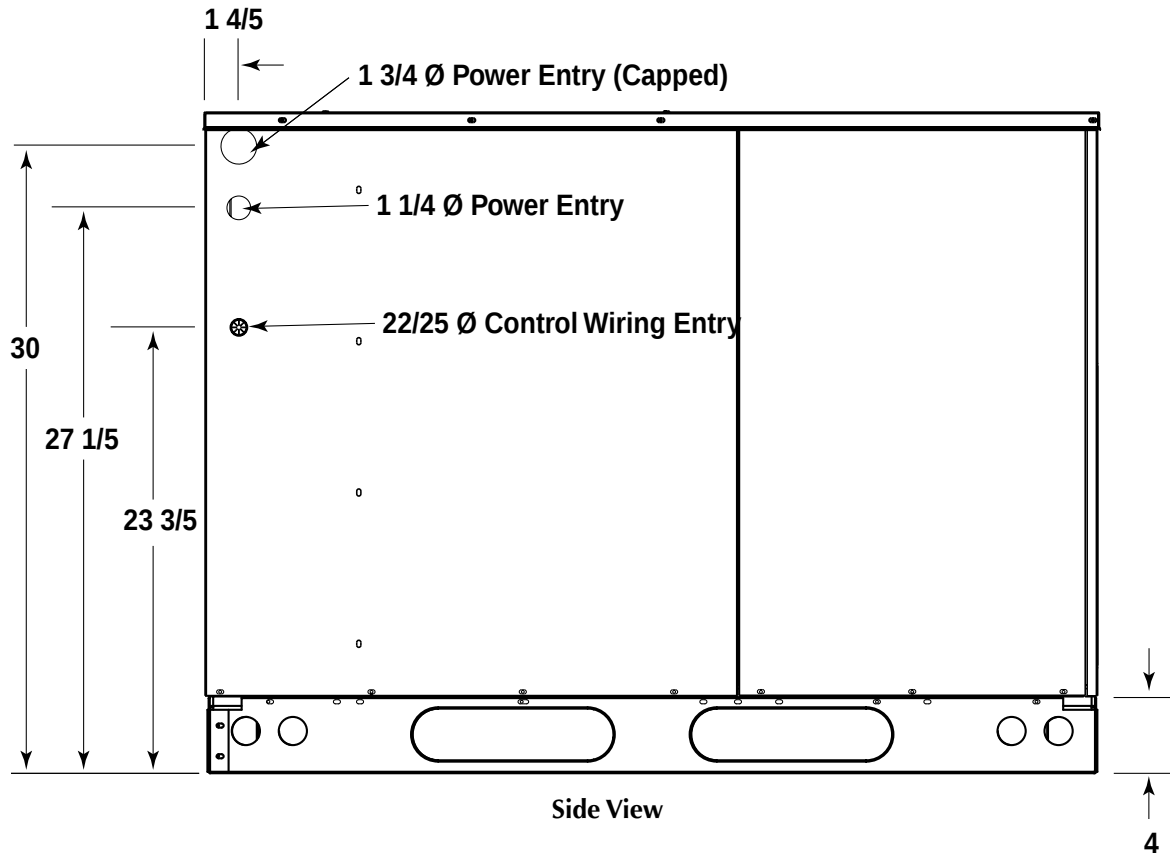

ELECTRICAL DATA

Model Number	Heater kw	Single Circuit			Multiple Supply Circuit Option					
		MCA	Rec, Wire Gage (90°C Cu)	MOP	Circuit A (Compressor, Blower & Fan)			Circuit B (Heater Only)		
					MCA	Rec, Wire Gage (90°C Cu)	MOP	MCA	Rec, Wire Gage (90°C Cu)	MOP
PPH1SE-X24K	0	20	12	30	-	-	-	-	-	-
	5	45	8	50	-	-	-	-	-	-
	8	60	6	60	20	12	30	40	-	-
	10	70	6	70	20	12	30	50	8	60
PPH1SE-X36K	0	29	10	45	-	-	-	-	-	-
	5	54	8	60	-	-	-	-	-	-
	8	69	6	70	29	10	45	40	8	40
	10	79	4	80	29	10	45	50	8	60
PPH1SE-X48K	15	104	3	110	54	8	60	50	8	60
	0	38	8	60	-	-	-	-	-	-
	5	63	6	80	38	8	60	25	10	30
	8	78	4	90	38	8	60	40	8	40
PPH1SE-X60K	10	88	4	100	38	8	60	50	8	60
	15	113	2	125	38	8	60	50	8	60
	20	138	1	150	38	8	60	50	8	60
	0	41	8	60	-	-	-	-	-	-
PPH1SE-X60K	5	66	6	80	41	8	60	25	10	30
	8	80	4	90	41	8	60	40	8	40
	10	91	4	100	41	8	60	50	8	60
	15	116	2	125	41	8	60	50	8	60
	20	141	1	150	41	8	60	50	8	60

BLOWER PERFORMANCE

Basic Air-Flow Settings

1/2 HP Motor						1/2 HP Motor						3/4 HP Motor							
SWITCH					Nominal	SWITCH					Nominal	SWITCH					Nominal		
CFM	1	2	3	4	2.0	CFM	1	2	3	4	3.0	CFM	1	2	3	4	4.0	5.0	
720	0	0	0	0	2 T O N	1080	0	0	0	1	3 T O N	1395	0	0	0	1	4 T O N	5 T O N	
800	0	0	0	1		1200	0	0	0	0		1485	1	0	0	1			
810	1	0	0	1		1215	1	0	0	1		1550	0	0	0	0			
880	0	0	1	0		1260	0	1	0	1		1620	0	1	0	1			
900	1	0	0	0		1320	0	0	1	0		1650	1	0	0	0			
945	0	1	0	1		1350	1	0	0	0		1705	0	0	1	0			
990	1	0	1	0		1395	1	1	0	1		1710	1	1	0	1			
1035	1	1	0	0		1400	0	1	0	0		1800	0	1	0	0			
1050	0	1	0	0		1485	1	0	1	0		1815	1	0	1	0			
1150	1	1	0	0		1540	0	1	1	0		1900	1	1	0	0			
1155	0	1	1	0		1550	1	1	0	0		1980	0	1	1	0			
1265	1	1	1	0		1705	1	1	1	0		2090	1	1	1	0			

Note: 1=ON, 0=OFF

Air Flow Selection for Variable Speed Motors

Nominal KW	CFM	Switch Number							
		1	2	3	4	5	6	7	8
0-5	500					0	0		
6-10	700					1	0		
11-15	900					0	1		
16-20	1100					1	1		

Note: 1=ON, 0=OFF

Minimum Electric Heat Airflow

Delay Description	Switch Number							
	1	2	3	4	5	6	7	8
Delay A							0	0
Delay B							0	1
No Delay							1	0
De-Hum.							1	1

Note: 1=ON, 0=OFF

Delay Settings


HEATER APPLICATION MATRIX

Model Number	H3HK-005H-01B	H3HK-008H-01B	H3HK-010H-01B	H3HK-015H-01B	H3HK-020H-01B	H3HK-015H-21B	H3HK-020H-21B
	917166B	917167B	917168B	917169B	917170B	917172B	917173B
PPH1SEX24K	X	X(2)	X(2)	NA	NA	X	NA
PPH1SEX36K	X	X(2)	X(2)	X(2)	NA	X	NA
PPH1SEX48K	X(2)	X(2)	X(2)	X(3)	X(3)	X(1)	X(1)
PPH1SEX60K	X(2)	X(2)	X(2)	X(3)	X(3)	X(1)	X(1)

NA = Not Applicable.

() = Number of internal circuit breaker kits required.

IDENTIFICATION CODE

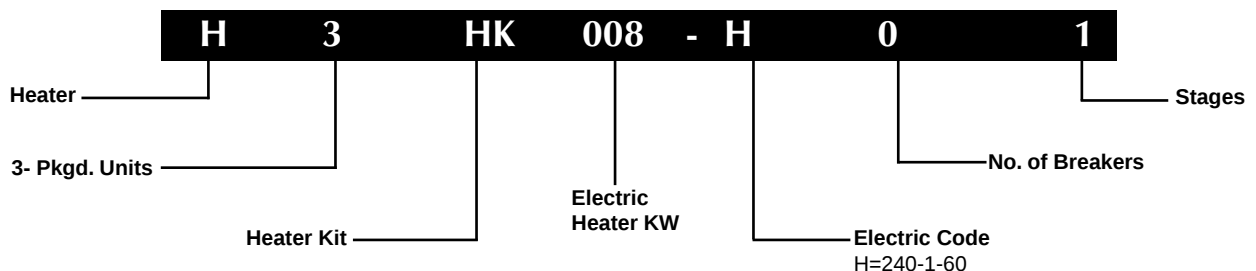

EXPANDED COOLING PERFORMANCE - 14 SEER H.P.

PPH1SE-X24K

O.D.T			85°F			95°F			105°F			115°F			
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
700		80	62	22.2	18.8	1.81	21.0	18.8	2.00	19.8	19.2	2.23	18.5	18.4	2.47
		80	67	24.5	15.4	1.73	23.3	15.0	1.92	22.0	14.5	2.13	20.5	14.0	2.37
		80	72	26.4	11.8	1.75	25.0	11.4	1.95	23.6	10.9	2.16	22.0	10.4	2.40
		75	63	22.8	15.2	1.72	21.7	15.2	1.90	20.5	15.0	2.11	19.1	14.7	2.35
850		80	62	23.1	20.8	1.82	22.0	20.9	2.02	20.8	20.3	2.24	19.5	19.5	2.49
		80	67	25.3	17.1	1.74	24.0	16.6	1.93	22.6	16.1	2.14	21.1	15.5	2.38
		80	72	27.2	12.8	1.76	25.8	12.3	1.95	24.2	11.8	2.17	22.5	11.3	2.41
		75	63	23.6	17.4	1.73	22.4	17.2	1.91	21.1	16.9	2.12	19.6	16.4	2.36
1000		80	62	24.1	22.3	1.83	23.0	21.8	2.03	21.7	21.7	2.25	20.3	20.3	2.51
		80	67	25.9	18.7	1.75	24.6	18.2	1.94	23.1	17.6	2.15	21.5	17.0	2.39
		80	72	27.7	13.7	1.77	26.2	13.2	1.96	24.6	12.7	2.18	22.9	12.1	2.42
		75	63	24.1	19.7	1.73	22.9	19.2	1.92	21.5	18.7	2.13	20.0	18.0	2.36

PPH1SE-X36K

O.D.T			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1200	80	62	32.7	28.1	2.70	31.1	28.1	2.98	29.3	28.6	3.29	27.6	27.4	3.64
	80	67	35.3	22.7	2.73	33.5	22.0	3.01	31.5	21.3	3.33	29.4	20.6	3.68
	80	72	37.7	17.3	2.77	39.6	17.9	2.51	41.2	18.4	2.28	42.6	18.8	2.07
	75	63	32.4	23.8	2.70	30.8	23.6	2.97	29.0	23.3	3.28	27.0	22.8	3.63
1350	80	62	33.5	29.5	2.71	31.8	30.2	2.99	30.2	29.4	3.30	28.4	28.4	3.66
	80	67	35.9	24.1	2.74	34.0	23.4	3.02	32.1	22.5	3.33	29.8	21.7	3.69
	80	72	38.3	18.2	2.78	40.1	18.7	2.52	41.8	19.2	2.29	43.3	19.7	2.07
	75	63	33.0	25.9	2.70	31.3	25.6	2.98	29.4	25.1	3.29	27.4	24.4	3.64
1500	80	62	34.1	31.6	2.72	32.6	31.0	3.00	30.9	30.9	3.31	29.1	29.1	3.67
	80	67	36.4	25.1	2.75	34.5	24.4	3.03	32.5	23.7	3.34	30.2	22.9	3.69
	80	72	38.8	19.0	2.78	40.6	19.6	2.53	42.4	20.1	2.30	43.9	20.6	2.08
	75	63	33.5	28.2	2.71	31.7	27.7	2.99	29.8	26.9	3.30	27.8	25.9	3.65

EXPANDED COOLING PERFORMANCE - 14 SEER H.P. (Cont.)

PPH1SE-X48K

O.D.T		85°F				95°F				105°F				115°F			
		E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.
1500	CFM	80	62	48.9	22.6	3.70	46.3	22.9	4.03	43.4	24.1	4.39	40.3	23.4	4.80	40.3	23.4
		80	67	45.7	29.7	3.65	43.4	28.8	3.98	40.7	27.8	4.34	37.9	26.7	4.74	37.9	26.7
		80	72	48.9	22.6	3.70	46.3	21.7	4.03	43.4	20.8	4.39	40.3	19.7	4.80	40.3	19.7
		75	63	41.9	30.7	3.59	39.7	30.7	3.91	37.3	30.2	4.28	34.7	29.4	4.67	34.7	29.4
1650		80	62	49.5	23.5	3.71	46.8	24.9	4.04	43.9	24.9	4.40	40.7	24.6	4.81	40.7	24.6
		80	67	46.4	31.2	3.66	44.0	30.2	3.99	41.3	29.2	4.35	38.4	28.1	4.76	38.4	28.1
		80	72	49.5	23.5	3.71	46.8	22.6	4.04	43.9	21.6	4.40	40.7	20.5	4.81	40.7	20.5
		75	63	42.6	33.4	3.60	40.3	33.0	3.92	37.9	32.2	4.29	35.2	31.2	4.68	35.2	31.2
1800		80	62	50.1	25.6	3.72	47.3	25.8	4.05	44.4	26.8	4.41	41.1	25.3	4.82	41.1	25.3
		80	67	47.0	32.6	3.67	44.5	31.7	4.00	41.8	30.6	4.36	38.8	29.4	4.77	38.8	29.4
		80	72	50.1	24.3	3.72	47.3	23.4	4.05	44.4	22.4	4.41	41.1	21.2	4.82	41.1	21.2
		75	63	43.1	36.3	3.61	40.8	35.4	3.93	38.4	34.3	4.30	35.6	32.9	4.69	35.6	32.9

PPH1SE-X60K

O.D.T		85°F				95°F				105°F				115°F			
		E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.
1600	CFM	80	62	52.0	41.5	4.47	49.4	41.6	4.95	46.6	42.7	5.46	43.5	41.7	6.03	43.5	41.7
		80	67	56.3	34.3	4.55	53.5	33.3	5.02	50.4	32.2	5.56	47.0	31.0	6.13	47.0	31.0
		80	72	61.5	26.3	4.64	58.2	25.4	5.12	54.5	24.5	5.65	50.7	23.4	6.23	50.7	23.4
		75	63	51.7	35.5	10.59	49.2	35.6	10.60	46.3	35.1	10.60	43.2	34.3	10.55	43.2	34.3
1800		80	62	53.2	44.2	4.49	50.6	45.6	4.97	47.7	45.2	5.49	44.5	44.5	6.06	44.5	44.5
		80	67	57.6	36.5	4.57	54.6	35.5	5.05	51.4	34.4	5.58	47.8	33.2	6.15	47.8	33.2
		80	72	62.1	27.7	4.66	59.0	26.8	5.14	55.4	25.8	5.67	51.6	24.6	6.25	51.6	24.6
		75	63	52.9	39.2	10.59	50.2	38.8	10.58	47.3	37.6	10.58	44.0	36.6	10.58	44.0	36.6
2000		80	62	54.4	48.0	4.51	51.7	47.8	4.99	48.6	48.6	5.51	45.7	45.7	6.09	45.7	45.7
		80	67	58.6	38.7	4.59	55.5	37.6	5.06	52.2	36.5	5.60	48.6	34.7	6.17	48.6	34.7
		80	72	63.2	29.0	4.68	59.9	28.1	5.16	56.2	27.0	5.69	52.3	25.9	6.27	52.3	25.9
		75	63	54.0	42.5	10.56	51.2	41.7	10.56	48.1	40.5	10.56	44.7	39.1	10.56	44.7	39.1

EXPANDED HEATING PERFORMANCE - 14 SEER H.P.

PPH1SE-X24K

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
700	60	10.0	1.88	1.57	12.6	2.31	1.60	13.7	2.49	1.61	17.3	3.06	1.66	21.0	3.61	1.70	23.5	3.98	1.73	24.6	4.13	1.75	28.2	4.62	1.79
	70	9.5	1.83	1.52	11.9	2.22	1.57	12.9	2.38	1.59	16.3	2.88	1.66	19.7	3.34	1.73	22.1	3.64	1.78	23.1	3.77	1.80	26.5	4.16	1.86
	80	8.9	1.74	1.50	11.1	2.10	1.55	12.1	2.24	1.58	15.2	2.69	1.66	18.4	3.10	1.73	20.6	3.37	1.79	21.5	3.48	1.81	24.7	3.82	1.89
850	60	10.1	1.82	1.63	12.8	2.25	1.66	13.9	2.43	1.67	17.6	3.01	1.71	21.3	3.57	1.75	23.9	3.94	1.78	25.1	4.09	1.80	28.8	4.59	1.84
	70	9.7	1.78	1.60	12.1	2.16	1.64	13.1	2.32	1.66	16.6	2.83	1.72	20.1	3.30	1.79	22.5	3.61	1.83	23.5	3.73	1.85	27.0	4.14	1.91
	80	9.1	1.70	1.56	11.4	2.05	1.62	12.3	2.20	1.64	15.6	2.65	1.72	18.8	3.06	1.80	21.1	3.33	1.86	22.1	3.44	1.88	25.3	3.79	1.96
1000	60	10.4	1.80	1.69	13.0	2.22	1.72	14.1	2.40	1.73	17.9	2.98	1.76	21.7	3.53	1.80	24.3	3.91	1.83	25.5	4.07	1.84	29.2	4.58	1.87
	70	9.8	1.75	1.65	12.3	2.13	1.69	13.4	2.29	1.71	16.9	2.80	1.77	20.5	3.27	1.84	23.0	3.58	1.88	24.0	3.71	1.90	27.6	4.13	1.96
	80	9.3	1.67	1.63	11.6	2.02	1.68	12.6	2.16	1.70	15.8	2.61	1.78	19.1	3.01	1.86	21.4	3.28	1.92	22.4	3.39	1.94	25.7	3.74	2.02

PPH1SE-X36K

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T.	10			17			20			30			40			47			50			60		
	Deg.F	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1200	60	15.0	1.96	2.24	18.6	2.38	2.29	20.1	2.55	2.31	25.2	3.09	2.39	30.3	3.60	2.47	33.9	3.94	2.52	35.4	4.08	2.55	40.5	4.53	2.62
	70	14.3	1.83	2.29	17.8	2.21	2.36	19.2	2.36	2.39	24.1	2.85	2.48	29.0	3.31	2.57	32.4	3.61	2.64	33.9	3.73	2.66	38.8	4.13	2.76
	80	13.8	1.70	2.37	17.0	2.04	2.44	18.4	2.18	2.47	23.1	2.63	2.57	27.8	3.04	2.68	31.0	3.31	2.75	32.4	3.43	2.78	37.1	3.78	2.88
1350	60	15.1	1.94	2.29	18.7	2.35	2.34	20.3	2.52	2.36	25.5	3.08	2.43	30.7	3.60	2.50	34.4	3.94	2.55	35.9	4.09	2.58	41.1	4.55	2.65
	70	14.5	1.81	2.35	18.0	2.19	2.41	19.5	2.35	2.44	24.5	2.84	2.52	29.4	3.31	2.61	32.9	3.61	2.67	34.4	3.74	2.70	39.4	4.15	2.78
	80	13.9	1.68	2.43	17.3	2.03	2.49	18.7	2.17	2.52	23.4	2.62	2.62	28.2	3.04	2.72	31.5	3.32	2.78	32.9	3.44	2.81	37.7	3.80	2.91
1500	60	15.2	1.91	2.34	18.9	2.33	2.38	20.5	2.50	2.40	25.8	3.06	2.47	31.1	3.59	2.54	34.8	3.94	2.59	36.3	4.08	2.61	41.6	4.56	2.68
	70	14.7	1.80	2.40	18.2	2.18	2.45	19.7	2.34	2.48	24.8	2.84	2.56	29.8	3.31	2.65	33.4	3.62	2.70	34.9	3.75	2.73	39.9	4.16	2.81
	80	14.1	1.67	2.48	17.5	2.02	2.54	18.9	2.16	2.57	23.7	2.61	2.66	28.5	3.04	2.75	31.9	3.32	2.82	33.3	3.43	2.85	38.1	3.80	2.94

EXPANDED HEATING PERFORMANCE - 14 SEER H.P. (Cont.)

PPH1SE-X48K

		OUTDOOR TEMPERATURE (Deg. F)																							
CFM	Indoor T. Deg.F	10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1500	60	16.5	1.91	2.54	21.6	2.40	2.64	23.8	2.60	2.68	31.0	3.22	2.83	38.2	3.78	2.97	43.3	4.14	3.07	45.5	4.29	3.11	52.7	4.75	3.25
	70	15.8	1.75	2.65	20.7	2.21	2.76	22.9	2.39	2.81	29.9	2.96	2.96	36.9	3.47	3.12	41.8	3.80	3.23	43.9	3.93	3.28	51.0	4.35	3.44
	80	15.3	1.61	2.78	20.0	2.03	2.89	22.1	2.20	2.95	28.9	2.72	3.12	35.7	3.19	3.29	40.5	3.48	3.40	42.5	3.61	3.46	49.3	3.99	3.63
1650	60	16.7	1.89	2.59	21.8	2.38	2.68	24.0	2.58	2.72	31.3	3.21	2.86	38.6	3.79	2.99	43.8	4.16	3.09	46.0	4.31	3.13	53.3	4.79	3.26
	70	16.0	1.74	2.70	21.0	2.20	2.80	23.1	2.38	2.85	30.2	2.96	3.00	37.3	3.48	3.15	42.3	3.82	3.25	44.4	3.95	3.30	51.5	4.39	3.45
	80	15.4	1.60	2.82	20.3	2.02	2.94	22.3	2.19	2.99	29.2	2.72	3.15	36.1	3.20	3.31	40.9	3.51	3.42	43.0	3.63	3.47	49.9	4.03	3.63
1800	60	16.8	1.87	2.63	22.0	2.37	2.72	24.2	2.57	2.76	31.6	3.20	2.89	39.0	3.78	3.02	44.2	4.16	3.12	46.4	4.31	3.16	53.8	4.80	3.29
	70	16.2	1.74	2.74	21.3	2.19	2.84	23.4	2.38	2.88	30.6	2.96	3.03	37.7	3.49	3.17	42.8	3.83	3.27	44.9	3.97	3.32	52.1	4.41	3.46
	80	15.6	1.60	2.87	20.5	2.02	2.98	22.6	2.19	3.02	29.5	2.72	3.18	36.5	3.21	3.33	41.3	3.52	3.44	43.4	3.65	3.49	50.4	4.05	3.65

PPH1SE-X60K

		OUTDOOR TEMPERATURE (Deg. F)																							
	Indoor T.	10			17			20			30			40			47			50			60		
CFM	Deg.F	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1600	60	27.3	2.85	2.81	32.8	3.10	3.10	35.1	3.20	3.22	42.9	3.47	3.63	50.7	3.69	4.04	56.2	3.81	4.32	58.5	3.86	4.44	66.3	4.01	4.85
	70	26.4	2.61	2.97	31.8	2.84	3.28	34.1	2.93	3.41	41.7	3.18	3.85	49.4	3.37	4.29	54.8	3.49	4.60	57.0	3.53	4.73	64.7	3.67	5.17
	80	25.9	2.42	3.15	31.1	2.62	3.48	33.4	2.70	3.63	40.8	2.91	4.11	48.2	3.08	4.59	53.4	3.18	4.92	55.7	3.22	5.07	63.1	3.34	5.55
1800	60	27.6	2.82	2.87	33.1	3.10	3.14	35.5	3.20	3.26	43.4	3.49	3.65	51.4	3.73	4.04	56.9	3.87	4.31	59.3	3.93	4.43	67.2	4.09	4.82
	70	26.8	2.60	3.03	32.2	2.84	3.32	34.5	2.94	3.45	42.3	3.21	3.87	50.0	3.42	4.29	55.4	3.55	4.58	57.7	3.60	4.71	65.5	3.74	5.13
	80	26.2	2.39	3.21	31.5	2.61	3.53	33.7	2.70	3.66	41.3	2.94	4.12	48.8	3.13	4.57	54.1	3.24	4.89	56.4	3.29	5.03	63.9	3.42	5.48
2000	60	27.7	2.78	2.91	33.3	3.07	3.18	35.7	3.18	3.30	43.8	3.49	3.68	51.8	3.75	4.06	57.5	3.90	4.32	59.9	3.96	4.44	68.0	4.14	4.82
	70	27.1	2.58	3.08	32.6	2.84	3.37	34.9	2.94	3.49	42.7	3.22	3.89	50.5	3.45	4.30	56.0	3.59	4.58	58.3	3.64	4.70	66.1	3.80	5.11
	80	26.5	2.38	3.27	31.8	2.61	3.57	34.1	2.70	3.70	41.7	2.96	4.14	49.3	3.16	4.57	54.6	3.29	4.88	56.9	3.33	5.01	64.5	3.48	5.44

ACCESSORIES

Description	Part Number
Roof Curb (8")	547830
Roof Curb (14")	547831
Roof Curb (18")	547850
Roof Curb (24")	547851
Supply/return transition, 16"	547834
Supply/return transition, 18"	547835
Concentric diffuser, flush, 16"	547836
Concentric diffuser, flush, 18"	547837
Concentric diffuser, step down 16"	547838
Concentric diffuser, step down 18"	547839
HOOD TYPE HAIL GUARD 34" X 76" PPH1SEX24, X36	547846
HOOD TYPE HAIL GUARD 38" X 76" PPH1SEX48, X60	547847
DUCT SMOKE DETECTOR PHOTO ELEC	558863
MULTI SIGNAL CONTROL	547893
SAMPLING TUBE DST3, 2-4'	558864
SAMPLING TUBE DST5, 4-8'	558865
Filter Rack, All Downflow Applications (not required with economizer)	547885
Horizontal Filter Kit (not required with economizer) PPH1SEX24, X36	547888
Horizontal Filter Kit (not required with economizer) PPH1SEX48, X60	547889
Low Ambient Kit	918837
Outdoor Thermostat Kit	913852
Economizer, downflow w/filter (does not require filter kit) modulating	558870
Economizer, horizontal modulating	547841
Power Exhaust, horizontal economizer (special order) 208/230	547843
Power Exhaust, downflow economizer (special order) 208/230	547842
Skirt trim kit	919729
Extreme high wind kit - roof curb mount	903696
Extreme high wind kit - ground mount	903695
Duct adapter, 14" round (2 each)	913812A
Control, CO2 sensor, wall mount	920317
Control, CO2 sensor, duct mount	920318
Freezestat kit	917108
Heater kit - 4 - Pole single circuit adaptor	913350
Heater kit - 6 - Pole single circuit adaptor	913556
Heater kit - Circuit breaker single phase (2-pole)	913554



We Encourage Professionalism



Through Technician Certification by NATE

MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ©Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2010. All rights reserved.

397C-0710 (Replaces 397C-0210)

Printed in U.S.A. (07/10)