

MAYTAG

TECHNICAL SPECIFICATIONS

*Model PPG2GF Series
with R-410A Refrigerant*



M1200 Product Line

**Single Packaged Gas/Electric Units
15 SEER — 2 - 5 Ton Units**

2-Stage Heat/Cool with Variable Speed Blower

- **M1200 - 12 YEAR ALL PARTS LIMITED WARRANTY**
- **M1200 WITH UPGRADED WARRANTY PACKAGE - 12 YEAR ALL PARTS & LABOR LIMITED WARRANTY**
- Both the standard and upgraded limited warranty packages offer a 12 Year Dependability Promise to replace the entire unit, if the unit's major component (heat exchanger or compressor) fails within the first 12 years of operation, to the original owner.
- Product registration (by consumer or dealer) required for 12-year Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.
- Dealer is responsible for registration of labor portion of warranty.
- Also when registered, this product is upgraded to a limited lifetime heat exchanger warranty.




The PPG2G Series single packaged gas/electrics are high efficiency self contained cooling units that can be installed on the roof or on a slab. The convertible unit design makes installations simple in all applications. Units are ETL and ETLc listed.

Features and Benefits

- **Copeland Ultra-Tech™ Scroll Compressor**
Two stage heat/cool with comfort alert II Communications/Diagnostics package.
- **Compact Footprint/Low Profile**
Easy to handle and transport.
- **Heavy-Gauge, Full Perimeter Base Rails**
Facilitates forklift handling and curb mounting.
- **Hi/low Pressure Switches**
Added compressor Protection.
- **Convertible Air Delivery**
Horizontal or downflow to accommodate rooftop or horizontal application.
- **R-410A Refrigerant**
Environmentally friendly.
- **Galvanized Steel Cabinet**
Unit is trimmed in a silicone-protected polyester finish with a 950 hour salt spray finish that resists corrosion 50% better than comparable units.
- **Wire Guard Coated with Earth Friendly Epoxy and Mesh Hail Guard:**
Will never rust and protects the coil from being damaged by balls, lawn-mowers, hail etc.
- **Externally Accessible High Flow Service Ports:** Quick access to refrigerant system without disrupting operation.
- **Access to Controls and Major Components**
Easy in and out service.
- **Corrosion-Resistant Drain Pan**
Quickly drains away evaporator condensate.
- **Smaller Panels, Great Fit and Finish, Total Seal** — Well-designed, quality construction. Drip edge on top panels whisks away rainwater. Embossed bottom pan keeps blower component compartment dry.
- **Thermal Expansion Valve**
Factory installed externally equalized thermal expansion valve provides precise refrigerant control under varying load conditions.
- **Proven, Industry Standard Components**
Easier service and availability.
- **ECM Variable Speed Motor**
Advanced technology allows the motor to automatically adjust to different static loads. The variable speed motor allows for extra quiet operation and improved air quality.
- **Quiet Operation and Low Vibration**
24" fan blade combined with custom venturi condenser fan.
- **Accessories**
Roof curbs and more.
- **SmartStart™ Control Board** — Provides extended life to ignitors using hot surface ignition technology. Programmed to learn the heat-up characteristics of the ignitor, then adapt the ignition time to the characteristics of the furnace so the ignitor is energized appropriately.
- **Quiet Plus™ Compressor Sound Blanket** — Engineered to significantly reduce unwanted noise.
- **Hot Surface igniter:** Innovative application of an appliance type igniter with a 20 year history of reliability. Utilizes proven SmartStart® technology.

IDENTIFICATION CODE

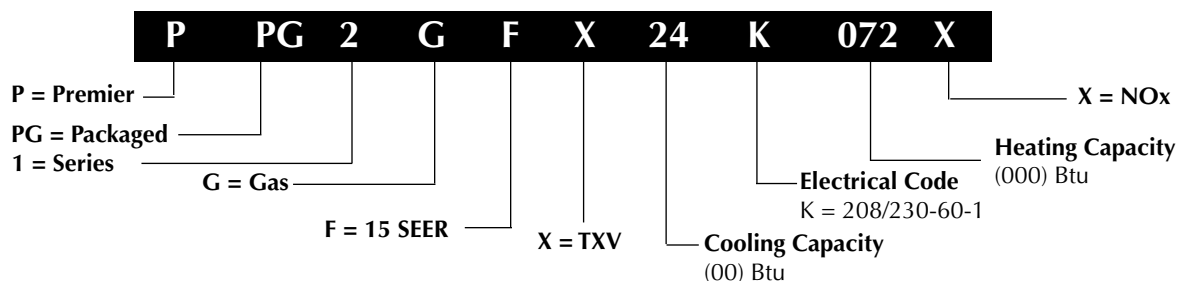


SPECIFICATIONS

Single Phase

MODEL	PPG2GFX24K072X	PPG2GFX36K100X	PPG2GFX48K120X	PPG2GFX60K120X
Performance				
Heating Input High/Low Btuh	72,000 / 46,800	100,000 / 65,000	120,000 / 72,000	120,000 / 72,000
Heating Output High/Low Btuh	57,600 / 37,440	80,000 / 52,000	96,000 / 57,600	96,000 / 57,600
Capacity-Cooling Btuh	24,000	35,200	47,000	55,500
AFUE	80	80	80	80
Efficiency -- SEER	15.00	15.00	15.00	15.00
Efficiency -- EER	12.00	12.00	12.00	12.00
Electrical Rating - 60 Hz				
Phase	1	1	1	1
Operating Voltage Range	187 - 253	187 - 253	187 - 253	187 - 253
Minimum Circuit Ampacity	20.8	30.9	41.9	44.4
Max. Overcurrent Protection	30	45	60	60
Compressor Data				
Volts	208 / 230	208 / 230	208 / 230	208 / 230
Rated Load Amps	11.4	19	24	26
Lock Rotor Amps	52	82	96	118
Indoor Blower				
Wheel Diameter	10 x 10	10 x 10	11 x 10	11 x 10
Motor Type	Variable Speed	Variable Speed	Variable Speed	Variable Speed
Motor HP	1/2	1/2	1	1
Motor Amps	4.3	4.3	9.1	9.1
Outdoor Fan				
Motor HP	1/4	1/4	1/4	1/4
Motor Amps	.91	1.46	1.46	1.46
Fan Diameter/CFM	20" / 3500	24" / 4000	24" / 4000	24" / 4000
Refrigerant Charge (oz)	131.2	128	240	272


DIMENSIONS

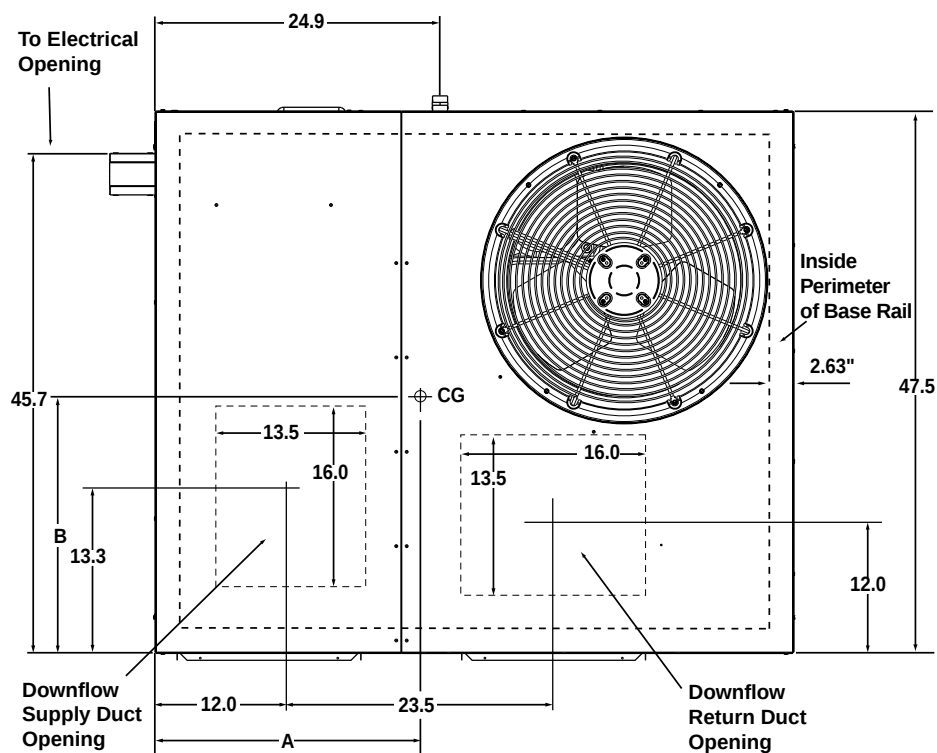


Top View

Model Number	Unit Weight	Shipping Weight	Center of Gravity		Height (in inches) C		Length D
			A	B	with base rails	without base rails	
X24K072X	460	470	26.0	27.0	39.0	35.3	55.8
X36K100X	480	490	26.0	27.0	39.0	35.3	55.8
X48K120X	609	618	26.0	27.0	47.0	43.3	55.8
X60K120X	659	675	30.0	26.5	47.0	43.3	63.6

DIMENSIONS continued

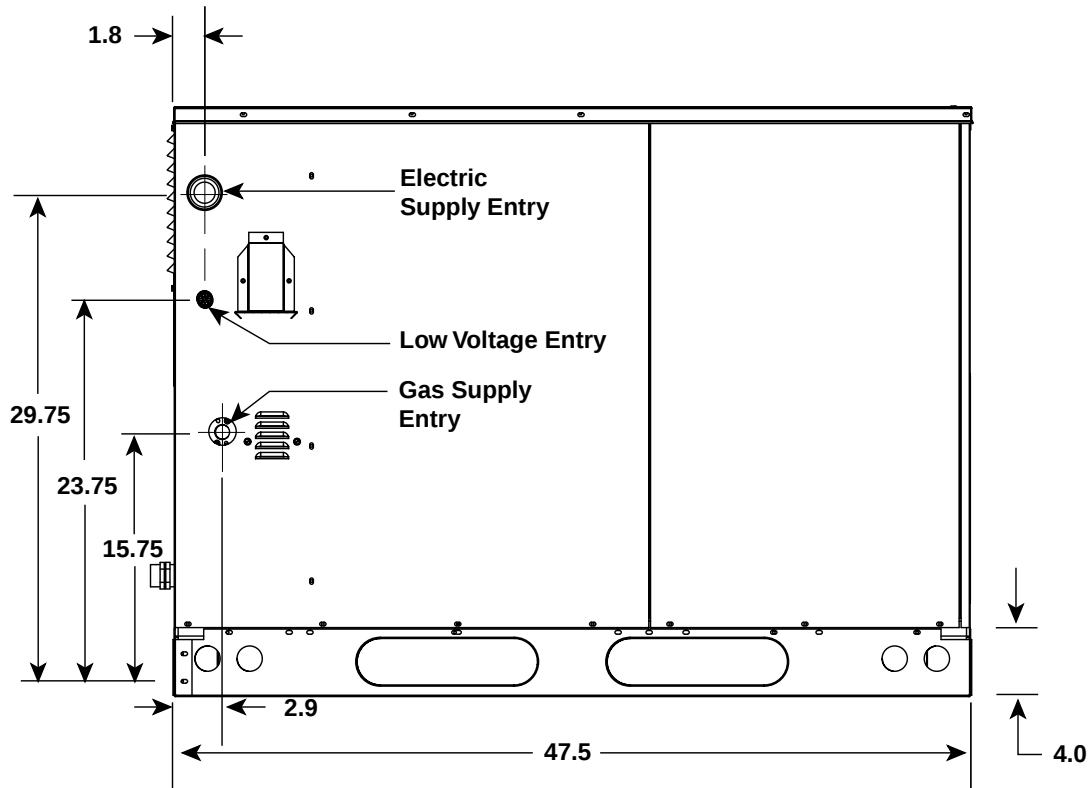

Side View

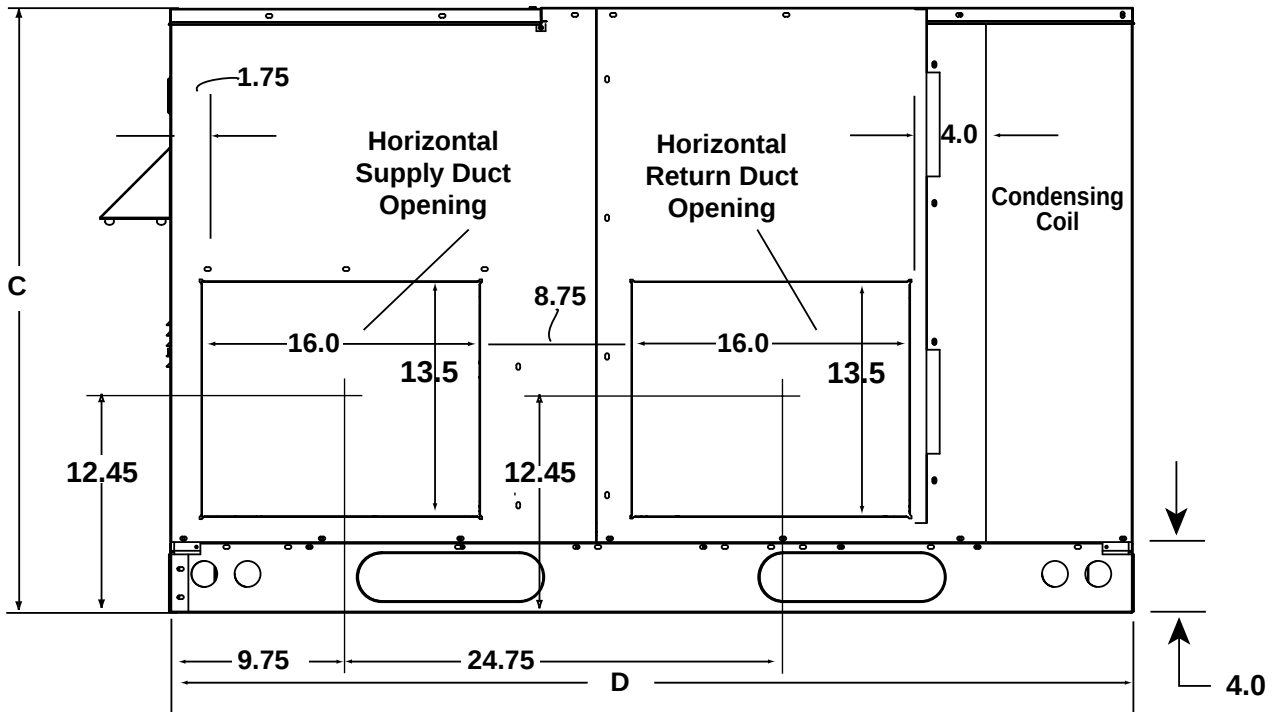

Back View

AIRFLOW DATA

Model Number	Heating Input (Btuh)	Heating Output (Btuh)	Heat Switch Setting	CFM	Heating Rise Range (°F)	Blower Size	Motor HP
X24K072X	72,000	57,600	1,1 0,1	1200 1000	35-65	10 X 10	1/2
	46,800	37,440	1,1 0,1	990 750			
X36K100X	100,000	80,000	0,1 1,1	1300 1400	40-70	10 X 10	1/2
	65,000	52,000	0,1 1,1	875 900			
X48K120X	120,000	96,000	1,1 0,1	2005 1805	40-70	11 X 10	1
	78,000	62,400	1,1 0,1	1200 1100			
X60K120X	120,000	96,000	1,1 0,1	2005 1805	40-70	11 X 10	1
	78,000	62,400	1,1 0,1	1200 1100			

NOTE: CFM and Rise are independent of ESP in a variable speed blower.

Cooling Airflow Settings

SWITCH NUMBER				RECOMMENDED A/C AIRFLOW RATE (CFM)	
1	2	3	4	2 TON	
0	0	0	1	2 TON	720
0	0	0	0		800
1	0	0	1		810
0	0	1	0		880
1	0	0	0	3 TON	900
0	1	0	1		900
1	0	1	0		990
0	1	0	0		1000
1	1	0	1	4 & 5 TON	1080
0	1	1	0		1100
1	1	0	0		1200
1	1	1	0		1320

SWITCH NUMBER				RECOMMENDED A/C AIRFLOW RATE (CFM)	
1	2	3	4	3 TON	
0	0	0	1	3 TON	810
0	0	0	0		900
1	0	0	1		990
0	0	1	0		990
0	1	0	1	4 & 5 TON	1080
1	0	0	0		1100
0	1	0	0		1200
1	0	1	0		1210
1	1	0	1	4 & 5 TON	1215
0	1	1	0		1320
1	1	0	0		1350
1	1	1	0		1485

SWITCH NUMBER				RECOMMENDED A/C AIRFLOW RATE (CFM)	
1	2	3	4	4-5 TON	
0	0	0	1	4 & 5 TON	1440
1	0	0	1		1530
0	0	0	0		1600
0	1	0	1		1620
1	0	0	0	4 & 5 TON	1700
1	1	0	1		1710
0	0	1	0		1760
0	1	0	0		1800
1	0	1	0	4 & 5 TON	1870
1	1	0	0		1900
0	1	1	0		1980
1	1	1	0		2090

NOTE: 0 = OFF 1 = ON

Heating Airflow Settings

Nominal Airflow Rates (CFM) and Temperature Rises (°F)														
Switches			072X				100X				120X			
			Low Fire Input		High Fire Input		Low Fire Input		High Fire Input		Low Fire Input		High Fire Input	
5	6	7	46,800		72,000		65,000		100,000		78,000		120,000	
0	0	#	N/A	N/A	N/A	N/A	850	57	1100	67	900	64	1500	59
1	0	#	N/A	N/A	N/A	N/A	850	57	1200	62	1100	53	1585	56
0	1	#	750	46	1000	53	875	55	1300	57	1100	53	1805	49
1	1	#	990	35	1200	44	900	53	1400	53	1200	48	2005	44

NOTE: 0 = OFF 1 = ON

Switch is not used — Can be 0 or 1

1. Recommended temperature rises are highlighted in **bold**.

2. Temperature rises in the table are approximate. Actual temperature rises may vary.

ACCESSORIES

Description	Part Number
Roof Curb (8")	547830
Roof Curb (14")	547831
Roof Curb (18")	547850
Roof Curb (24")	547851
Filter Rack, All Downflow Applications (not required with economizer)	547885
Filter Kit (not required with economizer) for Horizontal Applications X24 - X36	547888
Filter Kit (not required with economizer) for Horizontal Applications X48K - X60K	547889
Universal Hard Start Kit	912933
Low Ambient Kit	918837
U.S. LP Gas Conversion Kit (0 ft to 10,000 ft above sea level)	904404
Canadian LP Gas Conversion Kit (0 to 4,500 ft above sea level)	904405
Economizer, downflow w/filter (does not require filter kit) modulating	558870
Economizer, horizontal modulating	547841
Power Exhaust, horizontal economizer (special order)	547843
Skirt Kit 24, 36, 48	919729B
Skirt Kit 60	920936B

PACKAGE GAS/ELECTRIC

PPG2GFX24K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
650	80	62	25.0	21.6	1.25	24.0	21.1	1.44	22.9	20.6	1.65	21.8	20.1	1.89	20.7	19.5	2.17	19.5	18.9	2.50
	80	67	27.2	18.2	1.28	26.0	17.8	1.46	24.8	17.3	1.67	23.6	16.8	1.91	22.3	16.2	2.19	21.0	15.7	2.52
	80	72	29.7	14.9	1.31	28.5	14.4	1.49	27.2	14.0	1.70	25.9	13.5	1.93	24.5	13.0	2.21	23.0	12.4	2.55
	75	63	25.3	17.7	1.25	24.2	17.2	1.44	23.1	16.7	1.65	22.0	16.1	1.89	20.8	15.6	2.17	19.5	15.0	2.50
8200	80	62	26.1	24.3	1.26	25.0	23.8	1.45	24.0	23.3	1.66	23.0	22.4	1.90	21.9	21.3	2.19	20.8	20.2	2.52
	80	67	28.2	20.2	1.29	27.0	19.7	1.47	25.7	19.2	1.68	24.5	18.8	1.92	23.1	18.2	2.20	21.7	17.6	2.53
	80	72	30.8	16.2	1.32	29.5	15.7	1.50	28.1	15.2	1.71	26.7	14.7	1.94	25.2	14.2	2.22	23.5	13.6	2.55
	75	63	26.2	19.4	1.26	25.1	18.9	1.45	24.0	18.4	1.66	22.8	18.0	1.90	21.5	17.4	2.18	20.2	16.8	2.51
950	80	62	27.2	26.5	1.28	26.2	25.6	1.46	25.2	24.5	1.67	24.1	23.5	1.91	23.0	22.4	2.20	21.7	21.2	2.53
	80	67	29.0	22.2	1.30	27.8	21.7	1.48	26.5	21.1	1.69	25.1	20.6	1.92	23.7	20.0	2.20	22.2	19.4	2.54
	80	72	31.5	17.4	1.33	30.1	16.9	1.51	28.5	16.4	1.71	27.1	15.8	1.95	25.5	15.2	2.23	23.9	14.6	2.56
	75	63	25.9	20.8	1.46	25.9	20.8	1.46	24.7	20.3	1.67	23.4	19.7	1.90	22.1	19.1	2.19	20.7	18.5	2.52

PPG2GFX36K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
950	80	62	36.5	28.3	2.16	35.2	28.1	2.39	33.7	28.3	2.65	32.0	27.7	2.94	30.23	29.19	3.26	28.26	27.29	3.63
	80	67	39.6	23.3	2.18	38.1	23.2	2.41	36.5	23.4	2.67	34.7	22.9	2.96	32.73	22.51	3.28	30.54	21.02	3.66
	80	72	43.3	17.9	2.21	41.7	17.9	2.44	39.9	18.2	2.70	37.9	17.8	2.99	35.74	17.54	3.31	33.31	17.90	3.69
	75	63	37.0	22.8	2.16	35.6	22.6	2.40	34.1	22.8	2.65	32.4	22.3	2.94	30.53	20.35	3.27	28.47	21.93	3.64
1100	80	62	37.7	30.8	2.16	36.3	31.5	2.40	34.7	30.8	2.66	33.0	30.4	2.94	31.21	30.02	3.27	29.37	29.12	3.64
	80	67	40.7	25.1	2.19	39.2	25.9	2.42	37.5	25.2	2.68	35.6	25.0	2.97	33.52	24.93	3.29	31.24	24.83	3.66
	80	72	44.3	19.1	2.22	42.7	20.0	2.44	40.8	19.5	2.71	38.7	19.3	3.00	36.37	19.39	3.32	33.83	19.40	3.69
	75	63	38.1	24.5	2.17	36.6	25.2	2.40	35.0	24.5	2.66	33.2	24.2	2.95	31.29	24.09	3.27	29.14	23.91	3.64
1250	80	62	38.7	33.6	2.17	37.2	33.8	2.41	35.7	32.9	2.67	34.0	32.3	2.95	32.32	31.23	3.28	30.42	30.29	3.65
	80	67	41.6	27.3	2.19	40.0	27.7	2.43	38.2	27.1	2.69	36.3	27.0	2.97	34.15	26.74	3.30	31.80	26.76	3.67
	80	72	45.1	20.8	2.22	43.4	21.2	2.45	41.4	20.7	2.72	39.2	20.7	3.01	36.88	20.53	3.33	34.36	20.68	3.70
	75	63	38.9	26.6	2.17	37.4	26.9	2.41	35.7	26.2	2.67	33.9	26.1	2.95	31.89	25.77	3.28	29.68	25.71	3.65

PACKAGE GAS/ELECTRIC (CONTINUED)

PPG2GFX48K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1350	80	62	48.9	39.6	3.06	47.1	39.4	3.32	45.1	39.7	3.62	42.9	39.0	3.93	40.50	39.82	4.29	38.15	37.50	4.70
	80	67	53.4	32.2	3.09	51.5	32.1	3.36	49.3	32.5	3.65	46.9	31.9	3.97	44.13	31.43	4.32	41.09	29.46	4.73
	80	72	58.3	24.6	3.15	56.3	24.6	3.41	53.9	25.1	3.70	51.3	24.6	4.02	48.31	24.22	4.37	45.01	24.70	4.77
	75	63	49.6	31.4	3.07	47.8	31.2	3.33	45.7	31.5	3.63	43.4	30.9	3.94	40.88	28.22	4.30	38.02	30.50	4.70
1500	80	62	50.1	42.5	3.07	48.3	43.3	3.33	46.3	42.5	3.62	44.1	41.7	3.94	41.95	40.54	4.30	39.51	39.18	4.72
	80	67	54.5	34.3	3.11	52.5	35.4	3.37	50.3	34.6	3.66	47.7	34.3	3.98	44.93	34.26	4.33	41.80	34.17	4.74
	80	72	59.4	25.9	3.16	57.3	27.2	3.42	54.9	26.4	3.71	52.1	26.2	4.03	49.10	26.34	4.38	45.71	26.36	4.78
	75	63	50.7	33.3	3.08	48.8	34.3	3.34	46.7	33.5	3.63	44.3	33.1	3.95	41.64	32.98	4.30	38.70	32.78	4.71
1650	80	62	51.3	45.7	3.08	49.5	45.9	3.34	47.6	44.4	3.64	45.5	43.2	3.96	43.27	41.80	4.32	40.71	40.54	4.73
	80	67	55.4	36.9	3.12	53.4	37.4	3.38	51.1	36.6	3.67	48.5	36.6	3.99	45.61	36.32	4.34	42.41	36.41	4.74
	80	72	60.3	27.7	3.17	58.2	28.4	3.43	55.7	27.6	3.72	52.9	27.7	4.03	49.76	27.58	4.39	46.29	27.84	4.79
	75	63	51.6	35.8	3.09	49.6	36.2	3.35	47.4	35.4	3.64	45.0	35.2	3.95	42.29	34.91	4.31	39.29	34.87	4.72

PPG2GFX60K

ODT			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	EDB	EWB	TC	SC	KW	TC	SC	KW	TC	SC	KW	TC	SC	KW	TC	SC	KW	TC	SC	KW
1450	80	62	58.70	49.34	3.53	56.43	48.22	3.81	53.83	46.95	4.12	51.34	45.50	4.50	48.72	44.49	4.93	45.99	43.12	5.41
	80	67	63.88	41.92	3.62	61.30	40.80	3.88	58.56	39.66	4.20	55.61	38.44	4.57	52.55	37.19	5.00	49.29	35.81	5.47
	80	72	69.73	34.45	3.71	66.86	33.35	3.98	63.77	32.20	4.30	60.88	31.09	4.65	57.44	29.82	5.08	54.10	28.55	5.55
	75	63	59.30	40.57	3.55	56.96	39.47	3.81	54.48	38.33	4.14	51.78	37.12	4.50	48.97	35.84	4.93	45.97	34.44	5.41
1600	80	62	60.08	52.14	3.55	57.71	50.99	3.84	55.12	49.70	4.13	52.42	48.43	4.52	49.65	47.07	4.94	46.70	45.57	5.42
	80	67	65.11	44.01	3.63	62.34	42.81	3.90	59.52	41.68	4.22	56.67	40.47	4.57	53.74	39.41	4.98	50.78	38.25	5.43
	80	72	71.06	35.78	3.74	68.07	34.66	4.00	64.99	33.52	4.31	61.76	32.34	4.67	58.35	31.10	5.10	54.84	29.78	5.57
	75	63	60.70	42.59	3.56	58.82	41.73	3.84	55.48	40.21	4.15	52.78	38.96	4.52	49.95	37.84	4.95	46.65	36.36	5.42
1750	80	62	61.21	54.83	3.57	58.75	53.63	3.85	56.12	52.36	4.16	53.47	51.04	4.53	50.77	49.40	4.96	47.97	46.17	5.44
	80	67	66.10	46.01	3.65	63.21	44.66	4.41	60.48	43.62	4.23	57.61	42.60	4.59	54.28	41.20	5.02	51.25	40.17	5.47
	80	72	71.93	36.92	3.86	69.02	35.87	4.06	65.93	34.77	4.34	62.66	33.61	4.68	59.21	32.38	5.09	55.58	31.05	5.57
	75	63	61.67	44.41	3.58	59.15	43.26	3.85	56.60	42.09	4.16	53.82	41.00	4.52	50.79	39.64	4.97	47.65	38.27	5.45



MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by Nortek Global HVAC LLC, O'Fallon, MO. ©Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©Nortek Global HVAC LLC 2015. All rights reserved.

418D-0210 (Replaces 418D-0110)

Printed in U.S.A. (02/10)