

TECHNICAL SPECIFICATIONS

BSA2BD Series

Air Conditioner 13 SEER Residential System 1.5 – 5 Ton Capacity


The BSA2BD Series of air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.



FEATURES and BENEFITS

- **Quality Compressor:** State-of-the-art compressor is standard equipment.
- **Full Service Valves:** These brass valves are easily accessible and simplify servicing of the refrigeration system.
- **Designed Using Galvanized Steel:** With a polyester urethane coat finish, it passes 950 hours of salt spray per ASTM Std. B117.
- **Composite Base Pan:** Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.
- **Permanently Lubricated Motor:** A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Removable Top Grille Assembly:** Allows ease of service from the top without disconnecting fan motor leads.
- **High Pressure Switch:** Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter Drier:** Included with unit, field installed.
- **One Piece Top/Orifice:** Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access:** Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **All-Aluminum coils:** Aluminum coils in all models which provides high corrosion resistance.
- **Mesh Hail Guard:** Will never rust and protects the coil.

MODEL IDENTIFICATION CODES

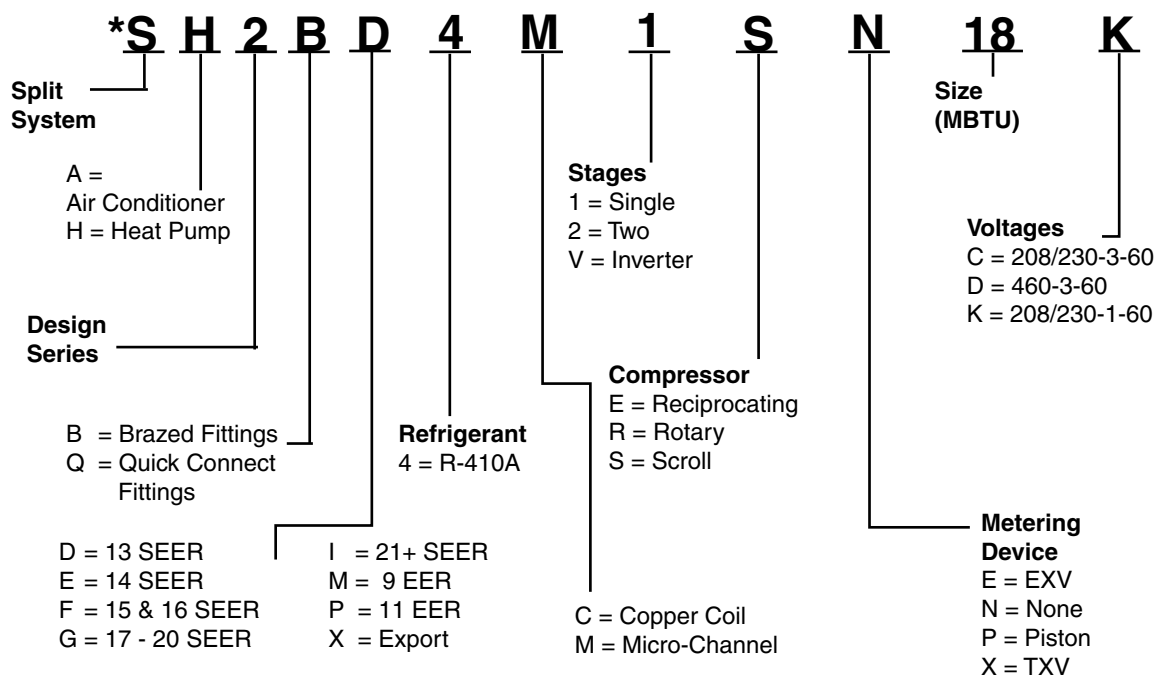


* May be preceded by an alphanumeric character denoting private brand.

DIMENSIONS
AIR CONDITIONER OUTDOOR SECTION

BSA2BD	18KA	24KA	30KA	36KA	42K	48K	60K
H	27 1/2	27 1/2	27 1/2	35 1/2	29 1/4	29 1/4	33 1/4
W	22 3/4	22 3/4	22 3/4	22 3/4	30 3/4	30 3/4	30 3/4
D	22 3/4	22 3/4	22 3/4	22 3/4	30 3/4	30 3/4	30 3/4

Air Discharge
Allow Adequate Clearance for Airflow

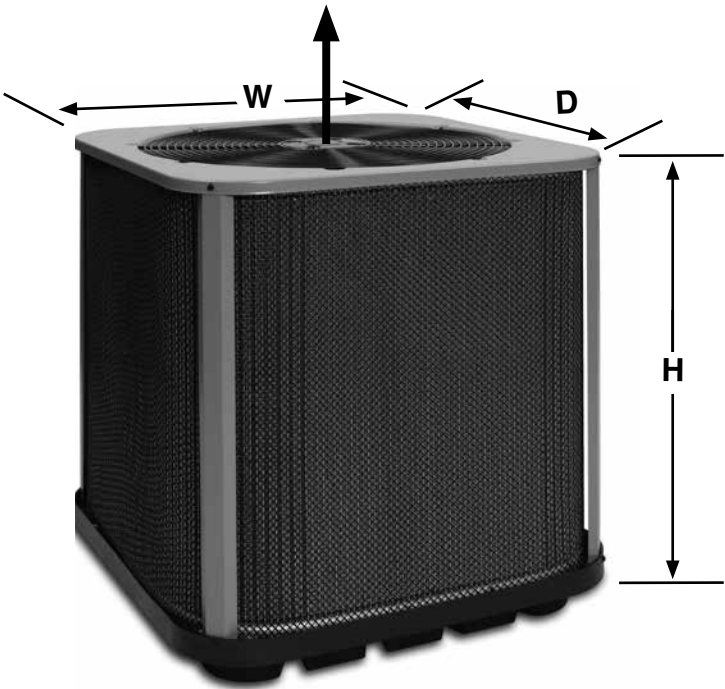

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

13 SEER — High Efficiency — Single Phase

Model Number BSA2BD4M1			RN18KA	RN24KA	RN30KA	RN36KA	SN42K	SN48K	SN60K
Electrical Data	Volts-Cycles-Phase (1)		208/230-60-1						
	Delay Fuse Max. (2)		15	15	20	25	40	50	60
	Min. Circuit Ampacity		8.7	11.1	13.1	16.4	23.0	28.6	34.2
	Fan Motor	HP	1/20	1/10	1/10	1/4	1/4	1/4	1/4
Refrigerant suction line O.D. NOTE: Liquid line is 3/8" O.D. for entire length.			0-24 ft.	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"
			25-39 ft.	3/4"	3/4"	3/4"	7/8" (3)	7/8"	1-1/8" (4)
			40-75 ft.	3/4"	3/4"	3/4"	7/8" (3)	7/8"	1-1/8" (4)
Approximate Weight (lbs.)			Net	97	108	116	126	151	144
			Ship	111	122	130	142	172	165
Sound Rating db				72	74	75	74	79	79

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 7/8" to 3/4" reducer from line to unit.

(4) Requires 7/8" to 1-1/8" reducer from line to unit.

Values based on suction line as follows with 3/8" liquid line.

a) 3/4" = 0.6 oz. per additional foot.

b) 7/8" = 0.7 oz. per additional foot.

c) 1 1/8" = 0.8 oz. per additional foot.

ACCESSORIES - Condensing Unit

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Extreme Wind Condition Mounting Kit - 920900

SYSTEM COOLING CAPACITIES

13 SEER — High Efficiency — Single Phase

Outdoor Unit	Indoor Unit	"Cooling Capacity BTU/h @ 95° F"	SEER	EER @ 95° F	CFM
BSA2BD4M1RN18KA	C7B(A,H)M01824(C,U)-A	17800	13	10.5	640
BSA2BD4M1RN18KA	C7B(A,H)M01824(C,U)-B	17800	13	10.5	640
BSA2BD4M1RN24KA	C7B(A,H)M01824(C,U)-A	22800	13	10.5	650
BSA2BD4M1RN24KA	C7B(A,H)M01824(C,U)-B	22800	13	10.5	650
BSA2BD4M1RN30KA	C7B(A,H)M03036(C,U)-A	28800	13	10.5	1000
BSA2BD4M1RN30KA	C7B(A,H)M03036(C,U)-B	28800	13	10.5	1000
BSA2BD4M1RN30KA	C7B(A,H)M030(C,U)-C	28800	13	10.5	1000
BSA2BD4M1RN36KA	C7B(A,H)M03036(C,U)-A	32400	13	10.5	1100
BSA2BD4M1RN36KA	C7B(A,H)M03036(C,U)-B	32400	13	10.5	1100
BSA2BD4M1RN36KA	C7B(A,H)M03642(C,U)-B	33000	13	10.5	1100
BSA2BD4M1RN36KA	C7B(A,H)M03648(C,U)-C	33000	13	10.5	1100
BSA2BD4M1SN42K	C7B(A,H)M03642(C,U)-B	40000	13	10.5	1290
BSA2BD4M1SN42K	C7B(A,H)M03648(C,U)-C	40000	13	10.5	1290
BSA2BD4M1SN42K	C7B(A,H)M042(C,U)-D	40000	13	10.5	1290
BSA2BD4M1SN48K	C7B(A,H)M03648(C,U)-C	46000	13	10.5	1415
BSA2BD4M1SN48K	C7B(A,H)M048(C,U)-C	45500	13	10.5	1305
BSA2BD4M1SN48K	C7B(A,H)M048(C,U)-D	45500	13	10.5	1305
BSA2BD4M1SN60K	C7B(A,H)M060(C,U)-C	55000	13	10.5	1445
BSA2BD4M1SN60K	C7B(A,H)M060(C,U)-D	55000	13	10.5	1445

See current AHRI Directory for certified combinations and ratings. All ratings are with time delay relay.
www.ahridirectory.org

Outdoor Unit	Indoor Unit	"Cooling Capacity BTU/h @ 95° F"	SEER	EER @ 95° F	CFM
BSA2BD4M1RN18KA	B6BMM024K-A	17600	13	10.5	640
BSA2BD4M1RN18KA	B6BMM024K-B	17600	13	10.5	640
BSA2BD4M1RN24KA	B6BMM024K-A	22800	13	10.5	820
BSA2BD4M1RN24KA	B6BMM024K-B	22800	13	10.5	820
BSA2BD4M1RN30KA	B6BMM030K-A	27000	13	10.5	860
BSA2BD4M1RN30KA	B6BMM030K-B	27000	13	10.5	860
BSA2BD4M1RN36KA	B6BMM036K-B	32400	13	10.5	1175
BSA2BD4M1RN36KA	B6BMM042K-B	32600	13	10.5	1200
BSA2BD4M1SN42K	B6BMM042K-B	40000	13	10.5	1370
BSA2BD4M1SN48K	B6BMM048K-B	46500	13	10.5	1355
BSA2BD4M1SN48K	B6BMM048K-C	47500	13	10.5	1630
BSA2BD4M1SN60K	B6BMM060K-C	55000	13	10.5	1700

See current AHRI Directory for certified combinations and ratings. All ratings are with time delay relay.
www.ahridirectory.org

COOLING EXPANDED RATINGS

BSA2BD4M1RN18KA C7B(A,H)M01824(C,U)-A

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	19.6	16.1	0.89	18.5	15.7	1.17	17.5	15.4	1.38	16.6	14.9	1.55	15.6	14.6	1.70	14.7	14.2	1.86
	80	67	20.3	12.8	0.89	20.1	13.1	1.17	19.1	12.8	1.38	18.2	12.5	1.55	17.2	12.1	1.71	16.2	11.6	1.88
	80	72	19.2	9.2	0.91	20.0	9.7	1.19	20.5	10.2	1.39	19.9	10.0	1.57	19.0	9.7	1.74	18.0	9.3	1.92
	75	62	19.7	13.9	0.90	18.5	13.4	1.17	17.5	13.0	1.38	16.5	12.6	1.55	15.6	12.1	1.70	14.6	11.7	1.86
	75	67	20.6	11.0	0.90	20.1	10.9	1.17	19.1	10.5	1.38	18.1	10.1	1.55	17.1	9.6	1.71	16.1	9.2	1.88
600	80	62	20.1	17.0	0.92	18.9	16.7	1.19	17.9	16.4	1.40	16.9	16.0	1.58	15.9	15.6	1.73	15.0	15.0	1.89
	80	67	20.4	13.0	0.92	20.4	13.7	1.19	19.5	13.5	1.41	18.5	13.2	1.58	17.5	12.7	1.74	16.5	12.3	1.91
	80	72	19.1	9.1	0.94	20.1	9.8	1.21	20.8	10.5	1.42	20.4	10.4	1.60	19.3	10.1	1.77	18.3	9.7	1.94
	75	62	20.0	14.6	0.93	18.9	14.2	1.20	17.8	13.6	1.41	16.8	13.3	1.58	15.9	12.9	1.73	14.9	12.5	1.89
	75	67	20.8	11.2	0.93	20.4	11.3	1.20	19.5	10.9	1.41	18.5	10.5	1.58	17.4	10.1	1.74	16.4	9.7	1.91
675	80	62	20.4	17.8	0.95	19.2	17.7	1.22	18.2	17.3	1.43	17.2	16.8	1.60	16.3	16.3	1.76	15.4	15.5	1.93
	80	67	20.4	13.1	0.95	20.7	14.3	1.22	19.8	14.2	1.43	18.8	13.9	1.61	17.7	13.5	1.77	16.7	12.9	1.94
	80	72	19.0	9.1	0.97	20.0	9.8	1.24	21.0	10.7	1.45	20.6	10.8	1.63	19.6	10.5	1.80	18.5	10.1	1.97
	75	62	20.5	15.3	0.96	19.3	14.9	1.22	18.1	14.3	1.43	16.9	13.4	1.61	16.1	13.7	1.76	15.1	13.2	1.92
	75	67	20.9	11.3	0.95	20.7	11.6	1.22	19.8	11.3	1.43	18.7	10.9	1.61	17.7	10.5	1.77	16.6	10.0	1.94

BSA2BD4M1RN24KA C7B(A,H)M01824(C,U)-B

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	24.7	20.5	1.19	23.5	20.3	1.49	22.2	19.8	1.72	21.0	19.4	1.92	19.8	18.9	2.10	18.5	18.1	2.29
	80	67	24.8	15.6	1.19	25.2	16.6	1.49	24.1	16.5	1.73	23.0	16.0	1.93	21.8	15.6	2.11	20.4	15.0	2.31
	80	72	24.1	11.5	1.22	24.4	11.8	1.52	25.5	12.7	1.75	25.3	12.8	1.95	24.2	12.5	2.15	22.9	12.0	2.36
	75	62	24.7	17.8	1.20	23.4	17.2	1.49	22.1	16.7	1.73	20.9	16.1	1.92	19.7	15.5	2.10	18.4	14.9	2.29
	75	67	25.3	13.5	1.20	25.2	13.8	1.49	24.2	13.4	1.73	22.9	12.9	1.93	21.7	12.4	2.11	20.4	11.8	2.31
800	80	62	25.2	21.5	1.23	24.0	21.6	1.53	22.6	21.0	1.76	21.4	20.7	1.96	20.2	19.9	2.14	19.1	19.1	2.34
	80	67	24.9	15.7	1.23	25.5	17.3	1.53	24.7	17.4	1.76	23.5	17.0	1.96	22.2	16.5	2.15	20.7	15.8	2.35
	80	72	24.0	11.4	1.26	24.4	11.8	1.55	25.7	12.9	1.79	25.6	13.3	1.98	24.6	13.0	2.18	23.2	12.4	2.40
	75	62	25.3	18.7	1.24	23.9	18.2	1.53	22.6	17.6	1.76	21.3	17.1	1.96	20.0	16.4	2.14	18.7	15.8	2.33
	75	67	25.3	13.6	1.23	25.5	14.2	1.53	24.6	13.9	1.77	23.3	13.5	1.96	22.0	12.9	2.15	20.6	12.3	2.35
900	80	62	25.4	22.3	1.27	24.3	22.8	1.56	23.0	22.2	1.80	21.8	21.5	2.00	20.8	20.8	2.18	19.6	19.6	2.38
	80	67	24.5	15.5	1.26	25.8	17.8	1.56	25.1	18.3	1.80	23.8	17.9	2.00	22.5	17.4	2.19	21.0	16.7	2.39
	80	72	23.9	11.4	1.30	24.3	11.8	1.59	25.7	13.0	1.83	25.9	13.6	2.02	24.9	13.4	2.22	23.5	13.0	2.44
	75	62	25.7	19.4	1.28	24.3	19.0	1.57	22.9	18.6	1.80	21.6	17.8	2.00	20.3	17.6	2.18	18.9	17.0	2.37
	75	67	25.3	13.7	1.27	25.8	14.5	1.57	25.0	14.5	1.80	23.7	14.0	2.00	22.3	13.4	2.19	20.9	12.8	2.39

BSA2BD4M1RN30KA C7B(A,H)M03036(C,U)-B

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
875	80	62	29.2	24.5	1.21	28.6	24.5	1.85	27.4	23.8	2.21	25.7	23.4	2.42	23.9	22.6	2.59	22.1	21.5	2.80
	80	67	31.4	20.2	1.26	31.2	20.5	1.87	29.9	20.0	2.21	28.1	19.4	2.42	26.2	18.5	2.60	24.2	17.7	2.83
	80	72	30.0	14.3	1.58	33.2	16.2	2.07	32.7	16.1	2.30	31.0	15.5	2.48	29.1	14.7	2.70	27.3	14.0	3.06
	75	62	29.0	20.8	1.23	28.6	20.7	1.86	27.3	20.2	2.21	25.7	19.5	2.42	23.8	18.7	2.59	22.0	17.8	2.79
	75	67	31.7	17.0	1.29	31.2	16.8	1.87	29.8	16.2	2.22	28.0	15.5	2.42	26.1	14.7	2.60	24.2	13.8	2.83
1000	80	62	29.9	25.9	1.28	29.2	26.0	1.91	27.9	25.7	2.25	26.1	24.9	2.47	24.3	23.8	2.63	22.7	22.7	2.85
	80	67	31.9	20.9	1.33	31.9	21.5	1.91	30.4	21.1	2.26	28.5	20.4	2.47	26.5	19.6	2.64	24.6	18.8	2.88
	80	72	30.0	14.3	1.62	33.8	16.6	2.08	33.4	16.7	2.33	31.6	16.0	2.52	29.6	15.3	2.74	27.7	14.7	3.10
	75	62	29.7	21.9	1.30	29.2	21.7	1.92	27.8	21.4	2.26	26.1	20.6	2.47	24.2	19.7	2.63	22.3	18.8	2.85
	75	67	32.4	17.6	1.35	31.8	17.4	1.92	30.3	16.8	2.26	28.5	16.1	2.47	26.5	15.2	2.64	24.5	14.4	2.88
1125	80	62	30.3	27.4	1.35	29.7	27.4	1.96	28.3	27.1	2.30	26.5	26.0	2.51	24.9	24.9	2.68	23.2	23.2	2.91
	80	67	32.3	21.6	1.39	32.3	22.5	1.96	30.8	22.0	2.30	28.9	21.4	2.51	26.8	20.7	2.69	24.8	19.8	2.93
	80	72	29.9	14.2	1.67	34.0	16.9	2.12	33.9	17.2	2.37	32.0	16.6	2.56	29.9	15.9	2.79	27.9	15.2	3.15
	75	62	30.5	23.1	1.38	29.7	22.8	1.97	27.8	21.5	2.31	26.4	21.6	2.51	24.4	20.7	2.68	22.5	19.7	2.90
	75	67	32.8	18.1	1.41	32.3	18.0	1.96	30.8	17.4	2.31	28.8	16.6	2.51	26.8	15.9	2.69	24.7	15.1	2.93

COOLING EXPANDED RATINGS (CONTINUED)

BSA2BD4M1RN36KA C7B(A,H)M03036(C,U)-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	34.4	28.2	1.82	32.8	27.9	2.22	31.1	27.2	2.53	29.4	26.6	2.79	27.5	25.8	3.04	25.6	24.7	3.30
	80	67	35.1	22.0	1.82	35.3	23.1	2.23	33.9	22.7	2.54	32.2	22.1	2.81	30.3	21.3	3.06	28.2	20.5	3.34
	80	72	33.7	16.1	2.00	35.4	17.0	2.37	36.8	18.0	2.65	36.1	17.9	2.90	34.5	17.3	3.17	32.6	16.6	3.48
	75	62	34.4	24.4	1.84	32.8	23.7	2.23	31.0	23.0	2.54	29.3	22.2	2.79	27.4	21.4	3.04	25.5	20.4	3.29
	75	67	35.8	19.0	1.84	35.3	19.0	2.24	33.8	18.4	2.54	32.1	17.7	2.81	30.2	16.9	3.06	28.1	16.0	3.33
1200	80	62	35.0	29.6	1.88	33.4	29.5	2.28	31.6	28.8	2.59	29.9	28.3	2.85	27.9	27.2	3.10	26.3	26.3	3.36
	80	67	35.3	22.3	1.88	35.8	24.0	2.29	34.6	23.8	2.60	32.7	23.2	2.86	30.8	22.5	3.12	28.6	21.6	3.40
	80	72	33.6	16.0	2.05	35.4	17.0	2.42	37.2	18.5	2.70	36.6	18.5	2.95	35.1	18.0	3.23	33.1	17.3	3.55
	75	62	35.2	25.5	1.90	33.4	24.9	2.28	31.6	24.2	2.59	29.7	23.3	2.85	27.8	22.4	3.10	25.9	21.4	3.36
	75	67	36.1	19.3	1.89	36.0	19.7	2.29	34.4	19.1	2.60	32.6	18.3	2.86	30.6	17.5	3.12	28.5	16.7	3.39
1350	80	62	35.5	30.8	1.94	33.9	31.0	2.34	32.1	30.3	2.65	30.2	29.6	2.91	28.6	28.6	3.16	26.8	26.8	3.43
	80	67	35.3	22.4	1.93	36.2	24.8	2.34	35.0	24.9	2.65	33.1	24.3	2.92	31.1	23.5	3.18	28.8	22.5	3.46
	80	72	33.4	15.9	2.11	35.3	17.0	2.48	37.5	18.8	2.75	37.1	19.1	3.01	35.5	18.6	3.29	33.4	17.8	3.61
	75	62	35.7	26.5	1.96	33.8	26.0	2.34	32.0	25.3	2.65	30.1	24.3	2.91	28.1	23.7	3.16	26.1	22.5	3.42
	75	67	36.2	19.4	1.95	36.3	20.2	2.35	34.9	19.7	2.65	33.0	19.0	2.92	30.9	18.2	3.18	28.7	17.3	3.46

BSA2BD4M1SN42K C7B(A,H)M03642(C,U)-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1150	80	62	41.5	31.9	2.54	39.8	31.6	2.76	38.0	31.7	3.01	35.9	31.0	3.32	33.5	32.3	3.68	31.2	30.1	4.05
	80	67	45.6	26.6	2.60	43.8	26.4	2.82	41.8	26.6	3.09	39.6	26.0	3.40	37.2	25.5	3.74	34.7	23.1	4.12
	80	72	50.5	20.7	2.69	48.5	20.6	2.92	46.3	21.0	3.20	43.9	20.5	3.49	41.4	20.2	3.83	38.7	20.7	4.21
	75	63	42.1	25.7	2.55	40.5	25.5	2.76	38.6	25.6	3.02	36.4	24.9	3.33	34.0	22.6	3.69	31.6	24.3	4.06
1300	80	62	42.5	34.0	2.61	40.8	34.6	2.83	38.9	33.7	3.08	36.7	33.1	3.40	34.4	32.7	3.75	32.2	31.9	4.13
	80	67	46.6	28.1	2.67	44.8	28.9	2.90	42.6	28.1	3.17	40.4	27.7	3.48	37.9	27.6	3.81	35.4	27.5	4.19
	80	72	51.5	21.7	2.77	49.3	22.7	3.00	47.1	22.0	3.27	44.6	21.8	3.57	41.9	21.9	3.90	39.1	22.0	4.28
	75	63	43.0	27.1	2.62	41.3	27.8	2.83	39.4	27.0	3.09	37.1	26.5	3.41	34.7	26.3	3.76	32.2	26.0	4.13
1450	80	62	43.3	36.4	2.68	41.6	36.5	2.90	39.6	35.6	3.15	37.4	35.0	3.48	35.2	34.0	3.82	33.2	33.1	4.20
	80	67	47.4	30.0	2.75	45.5	30.4	2.97	43.3	29.6	3.24	41.0	29.4	3.55	38.5	29.1	3.88	35.9	29.1	4.26
	80	72	52.2	23.2	2.84	49.9	23.7	3.08	47.5	23.0	3.33	45.0	23.0	3.64	42.3	22.8	3.97	39.6	23.0	4.35
	75	63	43.8	29.0	2.69	42.1	29.2	2.90	40.0	28.4	3.16	37.7	28.1	3.48	35.2	27.7	3.82	32.6	27.4	4.19

COOLING EXPANDED RATINGS (CONTINUED)

BSA2BD4M1SN48K C7B(A,H)M03648(C,U)-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	48.9	37.3	3.13	46.7	36.9	3.45	44.4	36.9	3.78	42.0	36.1	4.16	39.3	37.7	4.58	36.5	35.1	5.05
	80	67	53.7	31.1	3.22	51.5	30.8	3.53	49.1	31.0	3.86	46.4	30.3	4.24	43.6	29.7	4.67	40.7	26.9	5.14
	80	72	59.2	24.2	3.33	56.7	24.1	3.63	54.2	24.5	3.98	51.4	23.9	4.36	48.4	23.5	4.79	45.1	24.0	5.26
	75	63	49.7	30.1	3.14	47.5	29.7	3.46	45.1	29.8	3.80	42.6	29.1	4.17	39.9	26.3	4.59	37.0	28.4	5.06
1600	80	62	50.1	39.9	3.22	47.8	40.5	3.54	45.5	39.4	3.88	43.0	38.7	4.25	40.3	38.2	4.68	37.6	37.3	5.15
	80	67	54.9	33.0	3.32	52.6	33.9	3.63	50.1	32.9	3.96	47.4	32.5	4.34	44.5	32.4	4.77	41.4	32.2	5.24
	80	72	60.4	25.4	3.43	57.9	26.6	3.74	55.1	25.7	4.09	52.2	25.5	4.46	49.0	25.6	4.88	45.8	25.6	5.37
	75	63	50.8	31.9	3.24	48.6	32.6	3.55	46.1	31.6	3.89	43.5	31.1	4.26	40.8	30.9	4.69	37.8	30.6	5.16
1800	80	62	51.0	42.7	3.32	48.7	42.8	3.64	46.4	41.6	3.97	43.9	41.0	4.34	41.3	39.9	4.77	38.9	38.7	5.26
	80	67	55.9	35.3	3.42	53.5	35.7	3.72	50.9	34.7	4.06	48.1	34.5	4.43	45.1	34.2	4.86	42.0	34.2	5.34
	80	72	61.3	27.2	3.53	58.5	27.8	3.83	55.7	26.9	4.18	52.7	26.9	4.55	49.6	26.7	4.98	46.3	26.9	5.47
	75	63	51.7	34.1	3.34	49.4	34.3	3.65	46.9	33.3	3.98	44.2	33.0	4.35	41.4	32.6	4.78	38.3	32.2	5.25

BSA2BD4M1SN60K C7B(A,H)M060(C,U)-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1300	80	62	55.8	39.0	3.54	53.5	38.6	3.91	51.0	38.6	4.30	48.3	37.7	4.75	45.2	39.5	5.26	41.9	36.5	5.83
	80	67	61.9	33.0	3.64	59.4	32.7	4.00	56.7	32.9	4.41	53.8	32.2	4.87	50.7	31.5	5.39	47.5	28.0	5.97
	80	72	68.5	26.6	3.79	65.8	26.4	4.15	63.0	26.9	4.58	60.0	26.2	5.03	56.8	25.7	5.56	53.3	26.3	6.15
	75	62	55.7	33.3	3.54	53.4	32.8	3.90	50.9	32.9	4.30	48.2	32.0	4.75	45.1	28.9	5.25	41.8	31.1	5.83
1450	80	62	57.4	41.2	3.62	55.0	42.0	3.98	52.4	40.8	4.38	49.5	40.2	4.83	46.5	39.9	5.35	43.0	39.0	5.92
	80	67	63.4	34.6	3.73	60.8	35.6	4.09	58.1	34.6	4.50	55.2	34.1	4.96	52.0	34.0	5.48	48.5	33.8	6.06
	80	72	70.2	27.6	3.89	67.5	28.9	4.25	64.5	27.9	4.68	61.4	27.6	5.13	58.0	27.7	5.66	54.4	27.8	6.25
	75	62	57.2	34.9	3.62	54.8	35.7	3.98	52.2	34.6	4.38	49.4	33.9	4.83	46.3	33.6	5.35	42.9	33.2	5.91
1600	80	62	58.7	43.9	3.70	56.2	44.1	4.07	53.5	42.9	4.46	50.6	42.2	4.91	47.4	41.6	5.43	44.0	41.2	6.00
	80	67	64.8	36.8	3.82	62.2	37.2	4.18	59.3	36.1	4.58	56.3	35.9	5.05	53.0	35.5	5.57	49.5	35.6	6.15
	80	72	71.7	29.3	3.98	68.8	29.9	4.34	65.8	28.9	4.76	62.5	28.9	5.23	59.0	28.7	5.76	55.2	29.1	6.34
	75	62	58.6	37.0	3.70	56.1	37.3	4.06	53.3	36.1	4.46	50.4	35.7	4.91	47.4	35.2	5.43	43.8	34.9	5.99

COOLING EXPANDED RATINGS WITH AIR HANDLER

BSA2BD4M1RN18KA B6BMM024K-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	18.8	15.7	0.84	17.7	15.2	1.10	16.7	14.8	1.30	15.7	14.3	1.47	14.8	14.0	1.61	13.9	13.5	1.76
	80	67	19.9	12.8	0.85	19.1	12.7	1.10	18.2	12.3	1.30	17.2	11.9	1.47	16.3	11.6	1.62	15.3	11.2	1.78
	80	72	19.4	9.3	0.88	19.7	9.7	1.13	19.6	9.7	1.33	19.0	9.6	1.50	18.1	9.3	1.66	17.1	8.9	1.83
	75	62	18.7	13.4	0.85	17.6	12.9	1.10	16.6	12.4	1.30	15.7	12.0	1.47	14.8	11.6	1.61	13.9	11.2	1.76
	75	67	19.8	10.7	0.85	19.1	10.4	1.11	18.1	10.0	1.31	17.2	9.6	1.47	16.2	9.2	1.62	15.2	8.8	1.78
600	80	62	19.3	16.7	0.84	18.1	16.2	1.10	17.1	15.8	1.30	16.1	15.4	1.47	15.2	14.9	1.61	14.4	14.4	1.77
	80	67	20.2	13.2	0.85	19.6	13.3	1.11	18.7	13.1	1.31	17.7	12.7	1.47	16.7	12.3	1.62	15.6	11.9	1.78
	80	72	19.5	9.5	0.88	19.9	9.8	1.13	19.9	10.1	1.33	19.3	10.0	1.50	18.5	9.7	1.66	17.5	9.3	1.83
	75	62	19.3	14.2	0.85	18.1	13.7	1.10	17.0	13.2	1.30	16.1	12.8	1.47	15.1	12.5	1.61	14.2	12.0	1.76
	75	67	20.1	11.0	0.85	19.4	10.8	1.11	18.6	10.5	1.31	17.6	10.1	1.47	16.6	9.7	1.62	15.6	9.3	1.78
675	80	62	19.7	17.6	0.85	18.5	17.3	1.10	17.5	16.8	1.30	16.5	16.3	1.47	15.7	15.7	1.62	14.8	14.8	1.77
	80	67	20.5	13.6	0.85	19.9	13.9	1.11	19.0	13.8	1.31	18.0	13.5	1.47	17.0	13.1	1.63	15.9	12.7	1.78
	80	72	19.5	9.5	0.88	20.0	10.0	1.13	20.1	10.3	1.33	19.6	10.4	1.50	18.7	10.1	1.66	17.7	9.8	1.83
	75	62	19.7	14.9	0.85	18.5	14.5	1.11	17.4	14.1	1.30	16.4	13.6	1.47	15.4	13.2	1.62	14.4	12.7	1.77
	75	67	20.3	11.2	0.85	19.8	11.2	1.11	18.9	11.0	1.31	17.9	10.6	1.47	16.9	10.1	1.62	15.8	9.7	1.78

BSA2BD4M1RN24KA B6BMM024K-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	24.2	20.4	1.21	23.0	19.9	1.46	21.7	19.4	1.68	20.6	18.9	1.87	19.4	18.5	2.04	18.2	17.8	2.22
	80	67	26.4	17.4	1.21	25.0	16.7	1.47	23.8	16.3	1.68	22.6	15.8	1.88	21.4	15.3	2.05	20.0	14.7	2.25
	80	72	28.7	14.2	1.29	27.2	13.6	1.54	26.0	13.1	1.75	25.0	12.8	1.94	23.8	12.3	2.13	22.5	11.8	2.35
	75	62	24.2	17.5	1.21	22.9	16.9	1.47	21.7	16.3	1.68	20.5	15.8	1.87	19.3	15.3	2.04	18.1	14.7	2.22
	75	67	26.2	14.3	1.21	24.9	13.8	1.47	23.7	13.2	1.69	22.5	12.7	1.88	21.3	12.3	2.05	20.0	11.7	2.25
800	80	62	24.8	21.7	1.27	23.4	21.1	1.52	22.1	20.6	1.74	20.9	20.0	1.93	19.7	19.3	2.10	18.6	18.6	2.29
	80	67	26.9	18.2	1.27	25.4	17.5	1.53	24.2	17.1	1.75	22.9	16.6	1.93	21.7	16.2	2.12	20.3	15.5	2.31
	80	72	29.2	14.7	1.34	27.7	14.1	1.60	26.4	13.6	1.81	25.5	13.2	1.99	24.2	12.8	2.19	22.8	12.3	2.42
	75	62	24.7	18.4	1.27	23.3	17.8	1.53	22.0	17.2	1.74	20.8	16.6	1.93	19.6	16.2	2.10	18.3	15.5	2.29
	75	67	26.7	14.8	1.27	25.4	14.2	1.53	24.1	13.7	1.75	22.9	13.2	1.93	21.6	12.7	2.12	20.2	12.1	2.31
900	80	62	25.2	22.8	1.31	23.7	22.2	1.57	22.4	21.7	1.78	21.2	20.9	1.97	20.2	20.2	2.15	19.1	19.1	2.34
	80	67	27.3	19.0	1.31	25.8	18.3	1.57	24.5	17.9	1.79	23.2	17.4	1.98	21.9	16.9	2.16	20.5	16.2	2.36
	80	72	29.6	15.2	1.39	28.0	14.5	1.64	26.8	14.0	1.85	25.8	13.7	2.03	24.5	13.3	2.23	23.0	12.8	2.46
	75	62	25.1	19.1	1.31	23.7	18.6	1.57	22.3	18.1	1.78	21.1	17.3	1.97	19.8	17.1	2.15	18.5	16.5	2.33
	75	67	27.2	15.2	1.31	25.7	14.7	1.57	24.4	14.2	1.79	23.2	13.7	1.98	21.8	13.1	2.16	20.4	12.6	2.36

BSA2BD4M1RN30KA B6BMM030K-A

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
875	80	62	27.9	23.8	1.02	27.4	23.7	1.79	26.3	23.4	2.19	24.7	22.7	2.42	23.0	21.9	2.59	21.3	20.8	2.80
	80	67	30.3	20.0	1.12	29.8	19.9	1.82	28.6	19.5	2.20	27.0	18.8	2.43	25.2	18.0	2.60	23.3	17.3	2.84
	80	72	31.9	15.7	1.36	32.5	16.1	1.93	31.6	15.8	2.25	29.9	15.2	2.45	28.1	14.5	2.65	26.4	13.8	2.95
	75	62	27.9	20.3	1.03	27.4	20.2	1.80	26.2	19.7	2.20	24.7	19.0	2.43	22.9	18.1	2.59	21.2	17.4	2.80
	75	67	30.4	16.5	1.13	29.8	16.3	1.82	28.5	15.8	2.21	26.9	15.1	2.43	25.1	14.3	2.60	23.3	13.6	2.83
1000	80	62	28.7	25.5	1.06	28.1	25.3	1.80	26.9	24.8	2.20	25.3	24.3	2.43	23.5	23.1	2.60	22.0	22.0	2.82
	80	67	31.1	21.1	1.15	30.6	21.1	1.83	29.3	20.6	2.20	27.5	19.9	2.42	25.7	19.2	2.60	23.8	18.5	2.84
	80	72	32.3	16.1	1.37	33.2	16.8	1.92	32.2	16.5	2.24	30.5	15.9	2.44	28.7	15.2	2.65	26.9	14.6	2.96
	75	62	28.7	21.5	1.07	28.0	21.3	1.81	26.8	20.8	2.20	25.2	20.1	2.43	23.4	19.3	2.60	21.6	18.3	2.81
	75	67	31.1	17.3	1.17	30.5	17.1	1.83	29.2	16.6	2.21	27.5	15.8	2.42	25.6	15.1	2.60	23.7	14.3	2.84
1125	80	62	29.3	27.0	1.09	28.7	26.8	1.81	27.4	26.4	2.20	25.7	25.4	2.43	24.2	24.2	2.60	22.6	22.6	2.82
	80	67	31.7	22.1	1.18	31.2	22.2	1.83	29.8	21.7	2.20	28.0	21.0	2.42	26.1	20.2	2.60	24.1	19.5	2.84
	80	72	32.6	16.4	1.37	33.7	17.4	1.92	32.7	17.2	2.24	31.0	16.6	2.44	29.1	15.9	2.64	27.2	15.2	2.96
	75	62	29.3	22.7	1.10	28.6	22.5	1.82	27.3	21.9	2.20	25.6	21.3	2.43	23.8	20.5	2.60	21.9	19.6	2.81
	75	67	31.7	18.0	1.19	31.1	17.8	1.84	29.7	17.3	2.21	27.9	16.6	2.42	26.0	15.8	2.60	24.0	14.9	2.84

COOLING EXPANDED RATINGS WITH AIR HANDLER (CONTINUED)

BSA2BD4M1RN36KA B6BMM036K-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	33.8	28.2	1.87	32.2	27.7	2.28	30.6	27.1	2.59	29.1	26.4	2.85	27.5	25.8	3.09	25.8	24.9	3.36
	80	67	35.8	23.2	1.88	34.8	23.1	2.29	33.3	22.7	2.60	31.8	22.1	2.86	30.2	21.4	3.12	28.4	20.7	3.41
	80	72	35.1	17.1	1.97	36.7	18.2	2.37	36.5	18.3	2.67	35.2	17.8	2.93	33.7	17.2	3.21	31.9	16.5	3.53
	75	62	33.8	24.3	1.89	32.1	23.5	2.28	30.5	22.8	2.59	29.0	22.2	2.85	27.4	21.5	3.09	25.7	20.7	3.36
	75	67	36.1	19.6	1.89	34.7	19.0	2.29	33.3	18.4	2.60	31.7	17.8	2.86	30.1	17.1	3.12	28.3	16.3	3.40
1200	80	62	34.5	30.0	1.88	32.9	29.5	2.28	31.3	28.8	2.60	29.8	28.3	2.85	28.1	27.3	3.10	26.5	26.5	3.37
	80	67	36.5	24.2	1.89	35.6	24.5	2.29	34.1	24.0	2.60	32.5	23.4	2.87	30.8	22.7	3.13	28.9	21.9	3.41
	80	72	35.4	17.3	1.97	37.3	18.8	2.37	37.3	19.1	2.67	36.0	18.7	2.93	34.4	18.1	3.22	32.5	17.4	3.54
	75	62	34.6	25.6	1.89	32.9	24.9	2.29	31.2	24.2	2.60	29.7	23.5	2.86	28.0	22.8	3.10	26.3	21.9	3.37
	75	67	36.8	20.2	1.90	35.6	19.9	2.30	34.1	19.3	2.60	32.4	18.6	2.87	30.7	17.9	3.13	28.8	17.2	3.41
1350	80	62	35.2	31.6	1.88	33.6	31.2	2.28	31.9	30.6	2.60	30.3	29.7	2.86	28.9	28.9	3.11	27.3	27.3	3.39
	80	67	37.1	25.1	1.89	36.3	25.6	2.29	34.8	25.3	2.60	33.1	24.7	2.87	31.3	24.0	3.13	29.3	23.2	3.42
	80	72	35.5	17.5	1.97	37.7	19.3	2.37	37.8	19.8	2.66	36.7	19.5	2.93	35.0	18.9	3.22	33.0	18.2	3.55
	75	62	35.2	26.9	1.90	33.5	26.2	2.29	31.8	25.5	2.60	30.2	24.7	2.86	28.5	24.2	3.11	26.7	23.1	3.38
	75	67	37.3	21.0	1.90	36.2	20.7	2.30	34.7	20.1	2.60	33.0	19.5	2.87	31.2	18.7	3.13	29.3	17.9	3.42

BSA2BD4M1SN42K B6BMM042K-B

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1200	80	62	40.5	31.7	2.61	39.1	31.5	2.82	37.6	31.7	3.06	35.8	31.1	3.33	33.8	32.5	3.67	31.7	30.4	4.05
	80	67	44.5	26.3	2.69	42.9	26.2	2.91	41.1	26.5	3.16	39.2	26.0	3.44	37.2	25.6	3.77	34.9	23.5	4.13
	80	72	49.2	20.4	2.79	47.3	20.4	3.02	45.4	20.8	3.28	43.3	20.4	3.57	41.0	20.2	3.90	38.4	20.7	4.27
	75	63	41.1	25.4	2.63	39.6	25.3	2.83	38.0	25.5	3.07	36.2	25.0	3.34	34.2	22.9	3.68	31.9	24.6	4.05
	75	67	41.4	26.8	2.70	40.3	27.5	2.91	38.7	26.8	3.15	36.8	26.5	3.42	34.7	26.4	3.76	32.5	26.2	4.13
1350	80	62	41.4	33.6	2.69	39.9	34.3	2.89	38.3	33.5	3.14	36.5	33.1	3.41	34.5	32.7	3.75	32.4	32.2	4.13
	80	67	45.3	27.7	2.77	43.6	28.6	2.99	41.8	27.9	3.24	39.8	27.6	3.52	37.7	27.6	3.84	35.5	27.6	4.21
	80	72	50.0	21.4	2.87	48.0	22.4	3.10	46.0	21.8	3.36	43.7	21.6	3.65	41.3	21.8	3.98	38.9	21.9	4.35
	75	63	41.9	26.8	2.70	40.3	27.5	2.91	38.7	26.8	3.15	36.8	26.5	3.42	34.7	26.4	3.76	32.5	26.2	4.13
	75	67	42.2	28.5	2.77	40.9	28.8	2.99	39.2	28.1	3.22	37.3	28.0	3.50	35.2	27.7	3.83	32.9	27.5	4.20
1500	80	62	42.2	35.8	2.76	40.6	36.0	2.98	38.9	35.1	3.22	37.2	34.7	3.50	35.2	34.0	3.83	33.3	33.2	4.21
	80	67	46.0	29.6	2.84	44.3	30.0	3.06	42.4	29.3	3.32	40.4	29.2	3.60	38.2	29.0	3.92	35.9	29.1	4.29
	80	72	50.5	22.8	2.94	48.5	23.3	3.17	46.4	22.6	3.44	44.2	22.7	3.73	41.8	22.6	4.06	39.2	22.9	4.43
	75	63	42.5	28.5	2.77	40.9	28.8	2.99	39.2	28.1	3.22	37.3	28.0	3.50	35.2	27.7	3.83	32.9	27.5	4.20
	75	67	42.5	28.5	2.77	40.9	28.8	2.99	39.2	28.1	3.22	37.3	28.0	3.50	35.2	27.7	3.83	32.9	27.5	4.20

BSA2BD4M1SN48K B6BMM048K-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1200	80	62	40.5	31.7	2.61	39.1	31.5	2.82	37.6	31.7	3.06	35.8	31.1	3.33	33.8	32.5	3.67	31.7	30.4	4.05
	80	67	44.5	26.3	2.69	42.9	26.2	2.91	41.1	26.5	3.16	39.2	26.0	3.44	37.2	25.6	3.77	34.9	23.5	4.13
	80	72	49.2	20.4	2.79	47.3	20.4	3.02	45.4	20.8	3.28	43.3	20.4	3.57	41.0	20.2	3.90	38.4	20.7	4.27
	75	63	41.1	25.4	2.63	39.6	25.3	2.83	38.0	25.5	3.07	36.2	25.0	3.34	34.2	22.9	3.68	31.9	24.6	4.05
	75	67	41.4	26.8	2.70	40.3	27.5	2.91	38.7	26.8	3.15	36.8	26.5	3.42	34.7	26.4	3.76	32.5	26.2	4.13
1350	80	62	41.4	33.6	2.69	39.9	34.3	2.89	38.3	33.5	3.14	36.5	33.1	3.41	34.5	32.7	3.75	32.4	32.2	4.13
	80	67	45.3	27.7	2.77	43.6	28.6	2.99	41.8	27.9	3.24	39.8	27.6	3.52	37.7	27.6	3.84	35.5	27.6	4.21
	80	72	50.0	21.4	2.87	48.0	22.4	3.10	46.0	21.8	3.36	43.7	21.6	3.65	41.3	21.8	3.98	38.9	21.9	4.35
	75	63	41.9	26.8	2.70	40.3	27.5	2.91	38.7	26.8	3.15	36.8	26.5	3.42	34.7	26.4	3.76	32.5	26.2	4.13
	75	67	42.2	28.5	2.77	40.9	28.8	2.99	39.2	28.1	3.22	37.3	28.0	3.50	35.2	27.7	3.83	32.9	27.5	4.20
1500	80	62	42.2	35.8	2.76	40.6	36.0	2.98	38.9	35.1	3.22	37.2	34.7	3.50	35.2	34.0	3.83	33.3	33.2	4.21
	80	67	46.0	29.6	2.84	44.3	30.0	3.06	42.4	29.3	3.32	40.4	29.2	3.60	38.2	29.0	3.92	35.9	29.1	4.29
	80	72	50.5	22.8	2.94	48.5	23.3	3.17	46.4	22.6	3.44	44.2	22.7	3.73	41.8	22.6	4.06	39.2	22.9	4.43
	75	63	42.5	28.5	2.77	40.9	28.8	2.99	39.2	28.1	3.22	37.3	28.0	3.50	35.2	27.7	3.83	32.9	27.5	4.20
	75	67	42.5	28.5	2.77	40.9	28.8	2.99	39.2	28.1	3.22	37.3	28.0	3.50	35.2	27.7	3.83	32.9	27.5	4.20

BSA2BD4M1SN60K B6BMM060K-C

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1800	80	62	60.2	45.0	3.78	57.6	44.4	4.15	54.8	44.4	4.56	51.9	43.3	5.02	48.7	45.0	5.53	45.1	41.7	6.11
	80	67	65.5	37.5	3.89	62.7	37.0	4.25	59.9	37.2	4.66	56.8	36.3	5.12	53.5	35.5	5.64	50.0	32.1	6.22
	80	72	71.5	30.0	4.02	67.8	29.7	4.36	64.6	30.1	4.77	61.4	29.3	5.23	57.9	28.6	5.75	54.2	29.0	6.33
	75	63	60.5	36.3	3.78	57.8	35.7	4.17	55.1	35.8	4.57	52.1	34.7	5.02	48.8	31.2	5.54	45.2	33.5	6.11
1950	80	62	61.1	46.7	3.85	58.4	47.4	4.23	55.7	45.8	4.64	52.7	45.0	5.09	49.4	44.4	5.61	45.9	43.6	6.18
	80	67	66.4	38.6	3.96	63.6	39.6	4.33	60.7	38.4	4.74	57.6	37.7	5.20	54.2	37.5	5.71	50.6	37.1	6.29
	80	72	71.7	30.7	4.08	68.7	31.9	4.44	65.6	30.8	4.85	62.2	30.3	5.31	58.6	30.2	5.83	54.8	30.1	6.41
	75	63	61.4	37.4	3.86	58.7	38.1	4.24	55.9	36.8	4.64	52.8	36.1	5.09	49.5	35.6	5.61	45.8	35.0	6.18
2100	80	62	61.9	49.0	3.92	59.1	48.6	4.30	56.3	47.3	4.70	53.3	46.7	5.16	50.0	45.8	5.68	46.5	45.1	6.25
	80	67	67.2	40.4	4.04	64.4	40.7	4.40	61.4	39.5	4.81	58.2	39.1	5.27	54.8	38.5	5.79	51.2	38.4	6.36
	80	72	72.5	32.0	4.15	69.5	32.6	4.52	66.3	31.4	4.93	62.9	31.2	5.39	59.2	30.8	5.90	55.3	30.9	6.48
	75	63	62.2	39.0	3.93	59.4	39.2	4.30	56.5	37.9	4.71	53.4	37.3	5.16	50.1	36.6	5.68	46.4	36.1	6.25



GENERAL TERMS OF LIMITED WARRANTY

Nortek Global HVAC, LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nortek Global HVAC, LLC warranty department for a copy.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (04/2019)