

QUICK REFERENCE DATA

*SA4BD Series Residential Split System Air Conditioner

13 SEER

MODEL NUMBER: *SA4BD-			018KB	024KB	030KB	036KB	042KB	048KB	060KB
ELECTRICAL DATA	Volts-Cycles Phase (1)		208 / 230 - 60 - 1						
	Total Amps		9.3	13.5	14.8	18.0	19.4	23.2	27.8
	Delay Fuse Max. (2)		20	25	30	35	40	50	60
	Min. Circuit Ampacity		11.6	16.7	18.3	22.2	23.9	28.7	34.4
COMPONENT DATA	Coil	Area	8.3	8.3	10.0	10.0	15.3	15.3	17.9
		Rows-FPI	1-18						
		Tube Dia.	Micro-Channel						
	Fan Motor	Type	PSC						
		Amps	0.35	0.7	0.7	1.4	1.5	1.5	1.5
		HP	0.05	0.1	0.1	0.25	0.25	0.25	0.25
	Compressor Data	RLA	9.0	12.8	14.1	16.6	17.9	21.8	26.4
		LRA	48.0	58.3	73.0	79.0	112.0	117.0	134.0
RECOMMENDED REFRIGERANT SUCTION LINE O.D NOTE: Liquid line is 3/8" O.D. for entire length.		0 - 24 ft.	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"
		25 - 39 ft.	3/4"	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (4)
		40 - 75 ft.	3/4"	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (4)
REFRIGERANT CHARGE R-410A in ounces for outdoor unit & 15' Lineset. (5)			40.4	41.0	40.0	41.0	59.0	60.0	69.6
APPROXIMATE WEIGHT (LBS.)		Net	109	125	138	140	179	179	188
		Ship	114	130	144	146	187	187	197

- (1) Operating Voltage Range: 187v min. — 253v max.
- (2) HACR Type Circuit Breakers may be used.
- (3) Requires 7/8" to 3/4" reducer from line to unit.
- (4) Requires 7/8" to 1-1/8" reducer from line to unit.
- (5) Additional charge for line sets above 15 feet. Values based on suction line as follows with 3/8" liquid line.
 - (a) 3/4" = 0.6 oz. per additional foot.
 - (b) 7/8" = 0.7 oz. per additional foot.
 - (c) 1 1/8" = 0.8 oz. per additional foot.

Table 1. Electrical Specifications & Physical Data

THERMOSTAT WIRE GAUGE	RECOMMENDED T-STAT WIRE UNIT TO T-STAT (LENGTH IN FT)	
	2-WIRE (HEATING)	5-WIRE (HEATING/COOLING)
24	55	25
22	90	45
20	140	70
18	225	110

Table 2. Thermostat Wire Gauge

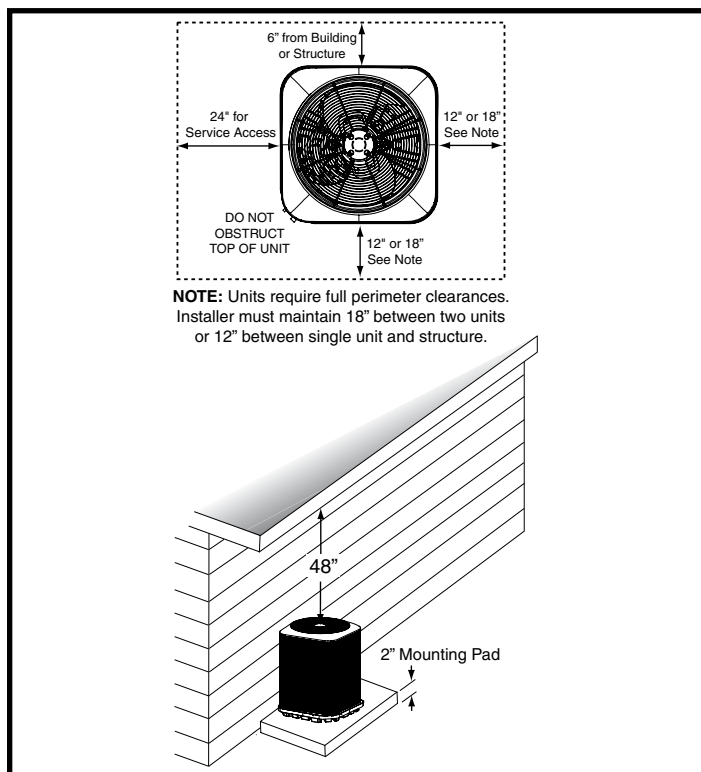


Figure 1. Clearance Requirements

Model PSA4BD Shown			
MODEL NUMBER	HEIGHT (H)	WIDTH (W)	DEPTH (D)
*SA4BD018KB	25"	22 3/4"	22 3/4"
*SA4BD024KB	25"	22 3/4"	22 3/4"
*SA4BD030KB	29"	22 3/4"	22 3/4"
*SA4BD036KB	29"	22 3/4"	22 3/4"
*SA4BD042KB	29 1/2"	30 3/4"	30 3/4"
*SA4BD048KB	29 1/2"	30 3/4"	30 3/4"
*SA4BD060KB	33 1/2"	30 3/4"	30 3/4"

Table 3. Unit Dimensions

Instructions:

1. Find the column for the model of outdoor unit that is being installed.
2. Find the row for the model of the indoor unit that is being installed.
3. Find the cell in the table in which this row and column meet. In this cell the appropriate orifice / TXV and charge addition for this match are listed. If the text in this cell is BOLD, then a change of orifice is necessary.
4. If a change in restrictor is necessary, then the appropriate restrictor will already be supplied with the outdoor unit.

Examples:

- For the *SA4BD030KB / B4VM-X30K-B match, the appropriate TXV is the 669565 and 36 ounces of charge will need to be added. (CHANGE IN CHARGE)
- For the *SA4BD024KB / B6EMMX24K-B match, the appropriate TXV is the 669564 and no additional charge needs to be added. (NO CHANGES ARE NECESSARY)

ID RESTRICTOR INSTALLED WITH ID UNIT	MODEL NUMBER: *SA4BD-		018KB	024KB	030KB	036KB	042KB	048KB	060KB
	ID RESTRICTOR SUPPLIED WITH OD UNIT:		0.048	0.056	0.060, 0.061	0.065, 0.067	0.071, 0.072	0.076, 0.077	0.087
	OUTDOOR UNIT BOM CHARGE (OZ.)		40.4	41	40	41	59	60	69.6
	MODELS	SUPPLIED WITH ID	REQUIRED RESTRICTOR OR TXV (CHARGE ADDITION (OZ) / RATED AIRFLOW (SCFM))						
	B4VM								
	B4VM-X24K-A	669564	669564 (30 / 550)	669564 (29 / 700)	--	--	--	--	--
	B4VM-X24K-B	669564	669564 (30 / 550)	669564 (29 / 700)	--	--	--	--	--
	B4VM-X30K-A	669565	--	--	669565 (36 / 950)	--	--	--	--
	B4VM-X30K-B	669565	--	--	669565 (36 / 950)	--	--	--	--
	B4VM-X36K-B	669566	--	--	--	669566 (31 / 950)	--	--	--
	B4VM-X48K-B	669568	--	--	--	--	669568 (34 / 1250)	--	--
	B4VM-X48K-C	669568	--	--	--	--	669568 (34 / 1250)	669568 (36 / 1400)	--
	B4VM-X60K-C	669578	--	--	--	--	--	--	669578 (36 / 1600)
	GB5BM-0								
	GB5BM-024K-A	0.055	0.048 (30 / 675)	0.055 (29 / 700)	--	--	--	--	--
	GB5BM-024K-B	0.055	0.048 (30 / 675)	0.055 (29 / 700)	--	--	--	--	--
	GB5BM-030K-A	0.065	--	--	0.065 (36 / 950)	--	--	--	--
	GB5BM-030K-B	0.065	--	--	0.065 (36 / 950)	--	--	--	--
	GB5BM-036K-B	0.073	--	--	--	0.073 (31 / 950)	--	--	--
	GB5BM-042K-B	0.077	--	--	--	--	0.077 (34 / 1250)	--	--
GB5BM-048K-C	0.080	--	--	--	--	--	0.080 (36 / 1400)	--	
GB5BM-060K-C	0.089	--	--	--	--	--	--	0.089 (36 / 1600)	

NOTES:

- The charges listed are only valid for the standard 15' lineset.
- Numbers listed as 0.*** are restrictor diameters, while numbers listed as 669*** are TXV part numbers.

Table 4. Restrictor or TXV / Charge Addition (Oz)

Instructions:

1. Find the column for the model of outdoor unit that is being installed.
2. Find the row for the model of the indoor unit that is being installed.
3. Find the cell in the table in which this row and column meet. In this cell the appropriate orifice / TXV and charge addition for this match are listed. If the text in this cell is **BOLD**, then a change of orifice is necessary.
4. If a change in restrictor is necessary, then the appropriate restrictor will already be supplied with the outdoor unit.

Examples:

- For the *SA4BD030KB / B4VM-X30K-B match, the appropriate TXV is the 669565 and 36 ounces of charge will need to be added. (CHANGE IN CHARGE)
- For the *SA4BD024KB / B6EMMX24K-B match, the appropriate TXV is the 669564 and no additional charge needs to be added. (NO CHANGES ARE NECESSARY)

ID RESTRICTOR INSTALLED WITH ID UNIT	MODEL NUMBER: *SA4BD-		018KB	024KB	030KB	036KB	042KB	048KB	060KB
	ID RESTRICTOR SUPPLIED WITH OD UNIT:		0.048	0.056	0.060, 0.061	0.065, 0.067	0.071, 0.072	0.076, 0.077	0.087
	OUTDOOR UNIT BOM CHARGE (OZ.)		40.4	41	40	41	59	60	69.6
	MODELS	SUPPLIED WITH ID	REQUIRED RESTRICTOR OR TXV (CHARGE ADDITION (OZ) / RATED AIRFLOW (SCFM))						
	GB5BMM								
	GB5BMM024K-A	0.055	0.048 (0 / 555)	0.055 (3 / 700)	--	--	--	--	--
	GB5BMM024K-B	0.055	0.048 (0 / 550)	0.055 (3 / 720)	--	--	--	--	--
	GB5BMM030K-A	0.062	--	--	0.060 (8 / 920)	--	--	--	--
	GB5BMM030K-B	0.062	--	--	0.060 (8 / 890)	--	--	--	--
	GB5BMM036K-B	0.067	--	--	--	0.065 (15 / 1160)	--	--	--
	GB5BMM042K-B	0.074	--	--	--	--	0.072 (0 / 1370)	--	--
	GB5BMM048K-B	0.079	--	--	--	--	--	0.079 (2 / 1355)	--
	GB5BMM048K-C	0.079	--	--	--	--	--	0.079 (2 / 1630)	--
	GB5BMM060K-C	0.087	--	--	--	--	--	--	0.087 (0 / 1950)
	B5BM-X								
	B5B(M,V)-X24K-A	669564	669564 (30 / 675)	669564 (29 / 700)	--	--	--	--	--
	B5B(M,V)-X24K-B	669564	669564 (30 / 675)	669564 (29 / 700)	--	--	--	--	--
	B5B(M,V)-X30K-A	669565	--	--	669565 (36 / 950)	--	--	--	--
	B5B(M,V)-X30K-B	669565	--	--	669565 (36 / 950)	--	--	--	--
	B5B(M,V)-X36K-B	669566	--	--	--	669566 (31 / 950)	--	--	--
	B5B(M,V)-X42K-B	669567	--	--	--	--	669567 (34 / 1250)	--	--
	B5B(M,V)-X48K-B	669568	--	--	--	--	--	669568 (36 / 1400)	--
	B5B(M,V)-X48K-C	669568	--	--	--	--	--	669568 (36 / 1400)	--
	B5B(M,V)-X60K-C	669578	--	--	--	--	--	--	669578 (36 / 1600)
	B5BW								
	GB5BW-030K(*)	0.063†	0.050 (30 / 660)	0.057 (29 / 675)	0.063 (36 / 760)	--	--	--	--

NOTES:

- The charges listed are only valid for the standard 15' lineset.
- Numbers listed as 0.*** are restrictor diameters, while numbers listed as 669*** are TXV part numbers.
- † The GB5BW-030K unit is supplied with extra 0.050, 0.057, and 0.065 restrictors.

Table 4. Restrictor or TXV / Charge Addition (Oz) - Continued

Instructions:

1. Find the column for the model of outdoor unit that is being installed.
2. Find the row for the model of the indoor unit that is being installed.
3. Find the cell in the table in which this row and column meet. In this cell the appropriate orifice / TXV and charge addition for this match are listed. If the text in this cell is BOLD, then a change of orifice is necessary.
4. If a change in restrictor is necessary, then the appropriate restrictor will already be supplied with the outdoor unit.

Examples:

- For the *SA4BD030KB / B4VM-X30K-B match, the appropriate TXV is the 669565 and 36 ounces of charge will need to be added. (CHANGE IN CHARGE)
- For the *SA4BD024KB / B6EMMX24K-B match, the appropriate TXV is the 669564 and no additional charge needs to be added. (NO CHANGES ARE NECESSARY)

ID RESTRICTOR INSTALLED WITH ID UNIT	MODEL NUMBER: *SA4BD-		018KB	024KB	030KB	036KB	042KB	048KB	060KB
	ID RESTRICTOR SUPPLIED WITH OD UNIT:		0.048	0.056	0.060, 0.061	0.065, 0.067	0.071, 0.072	0.076, 0.077	0.087
	OUTDOOR UNIT BOM CHARGE (OZ.)		40.4	41	40	41	59	60	69.6
	MODELS	SUPPLIED WITH ID	REQUIRED RESTRICTOR OR TXV (CHARGE ADDITION (OZ) / RATED AIRFLOW (SCFM))						
	B6BMM0								
	B6BMM024K-A	0.055	0.048 (0 / 555)	0.055 (3 / 700)	--	--	--	--	--
	B6BMM024K-B	0.055	0.048 (0 / 550)	0.055 (3 / 720)	--	--	--	--	--
	B6BMM030K-A	0.062	--	--	0.060 (8 / 920)	--	--	--	--
	B6BMM030K-B	0.062	--	--	0.060 (8 / 890)	--	--	--	--
	B6BMM036K-B	0.067	--	--	--	0.065 (15 / 1160)	--	--	--
	B6BMM042K-B	0.074	--	--	--	--	0.072 (0 / 1370)	--	--
	B6BMM048K-B	0.079	--	--	--	--	--	0.079 (2 / 1355)	--
	B6BMM048K-C	0.079	--	--	--	--	--	0.079 (2 / 1630)	--
	B6BMM060K-C	0.087	--	--	--	--	--	--	0.087 (0 / 1950)
	B6BMMX								
	B6BMMX24K-A	669564	669564 (0 / 670)	669564 (0 / 740)	--	--	--	--	--
	B6BMMX24K-B	669564	669564 (0 / 530)	669564 (0 / 690)	--	--	--	--	--
	B6BMMX30K-A	669565	--	--	669565 (2 / 960)	--	--	--	--
	B6BMMX30K-B	669565	--	--	669565 (2 / 910)	--	--	--	--
	B6BMMX36K-B	669566	--	--	--	669566 (6 / 1155)	--	--	--
	B6BMMX42K-B	669567	--	--	--	--	669567 (4 / 1265)	--	--
	B6BMMX48K-C	669568	--	--	--	--	--	669568 (3 / 1430)	--
B6BMMX60K-C	669578	--	--	--	--	--	--	669578 (0 / 1605)	

NOTES:

- The charges listed are only valid for the standard 15' lineset.
- Numbers listed as 0.*** are restrictor diameters, while numbers listed as 669*** are TXV part numbers.

Table 4. Restrictor or TXV / Charge Addition (Oz) - Continued

Instructions:

1. Find the column for the model of outdoor unit that is being installed.
2. Find the row for the model of the indoor unit that is being installed.
3. Find the cell in the table in which this row and column meet. In this cell the appropriate orifice / TXV and charge addition for this match are listed. If the text in this cell is **BOLD**, then a change of orifice is necessary.
4. If a change in restrictor is necessary, then the appropriate restrictor will already be supplied with the outdoor unit.

Examples:

- For the *SA4BD030KB / B4VM-X30K-B match, the appropriate TXV is the 669565 and 36 ounces of charge will need to be added. (CHANGE IN CHARGE)
- For the *SA4BD024KB / B6EMMX24K-B match, the appropriate TXV is the 669564 and no additional charge needs to be added. (NO CHANGES ARE NECESSARY)

ID RESTRICTOR INSTALLED WITH ID UNIT	MODEL NUMBER: *SA4BD-		018KB	024KB	030KB	036KB	042KB	048KB	060KB
	ID RESTRICTOR SUPPLIED WITH OD UNIT:		0.048	0.056	0.060, 0.061	0.065, 0.067	0.071, 0.072	0.076, 0.077	0.087
	OUTDOOR UNIT BOM CHARGE (OZ.)		40.4	41	40	41	59	60	69.6
	MODELS	SUPPLIED WITH ID	REQUIRED RESTRICTOR OR TXV (CHARGE ADDITION (OZ) / RATED AIRFLOW (SCFM))						
	B6BM-X								
	B6BM-X24K-A	669564	669564 (30 / 675)	669564 (29 / 825)	--	--	--	--	--
	B6BM-X24K-B	669564	669564 (30 / 650)	669564 (28 / 800)	--	--	--	--	--
	B6BM-X30K-A	669565	--	--	669565 (36 / 950)	--	--	--	--
	B6BM-X30K-B	669565	--	669565 (29 / 700)	669565 (36 / 950)	--	--	--	--
	B6BM-X36K-B	669566	--	--	--	669566 (40 / 1145)	--	--	--
	B6BM-X42K-B	669567	--	--	--	--	669564 (34 / 1250)	--	--
	B6BM-X48K-C	669568	--	--	--	--	--	669568 (34 / 1585)	--
	B6BM-X60K-C	669578	--	--	--	--	--	--	669578 (36 / 1600)
	B6BW								
	B6BW-018K(*)	0.056	0.048 (0 / 600)	--	--	--	--	--	--
	B6BW-024K(*)	0.057	--	0.057 (3 / 800)	--	--	--	--	--
B6BW-030K(*)	0.060	--	--	0.060 (8 / 950)	--	--	--	--	
B6BW-036K(*)	0.069	--	--	--	0.067 (0 / 1100)	--	--	--	
B6EW									
B6EW-X18K	669564	669564 (9 / 640)	--	--	--	--	--	--	
B6EW-X24K	669564	--	669564 (5 / 800)	--	--	--	--	--	
B6EW-X30K	669565	--	--	669565 (13 / 905)	--	--	--	--	
B6EW-X36K	669566	--	--	--	669566 (13 / 1200)	--	--	--	

NOTES:

- The charges listed are only valid for the standard 15' lineset.
- Numbers listed as 0.*** are restrictor diameters, while numbers listed as 669*** are TXV part numbers.

Table 4. Restrictor or TXV / Charge Addition (Oz) - Continued

Instructions:

1. Find the column for the model of outdoor unit that is being installed.
2. Find the row for the model of the indoor unit that is being installed.
3. Find the cell in the table in which this row and column meet. In this cell the appropriate orifice / TXV and charge addition for this match are listed. If the text in this cell is BOLD, then a change of orifice is necessary.
4. If a change in restrictor is necessary, then the appropriate restrictor will already be supplied with the outdoor unit.

Examples:

- For the *SA4BD030KB / B4VM-X30K-B match, the appropriate TXV is the 669565 and 36 ounces of charge will need to be added. (CHANGE IN CHARGE)
- For the *SA4BD024KB / B6EMMX24K-B match, the appropriate TXV is the 669564 and no additional charge needs to be added. (NO CHANGES ARE NECESSARY)

ID RESTRICTOR INSTALLED WITH ID UNIT	MODEL NUMBER: *SA4BD-		018KB	024KB	030KB	036KB	042KB	048KB	060KB
	ID RESTRICTOR SUPPLIED WITH OD UNIT:		0.048	0.056	0.060, 0.061	0.065, 0.067	0.071, 0.072	0.076, 0.077	0.087
	OUTDOOR UNIT BOM CHARGE (OZ.)		40.4	41	40	41	59	60	69.6
	MODELS	SUPPLIED WITH ID	REQUIRED RESTRICTOR OR TXV (CHARGE ADDITION (OZ) / RATED AIRFLOW (SCFM))						
	B6EM								
	B6EMMX24K-A	669564	669564 (0 / 670)	669564 (0 / 740)	--	--	--	--	--
	B6EMMX24K-B	669564	669564 (0 / 530)	669564 (0 / 690)	--	--	--	--	--
	B6EMMX30K-A	669565	--	--	669565 (2 / 960)	--	--	--	--
	B6EMMX30K-B	669565	--	--	669565 (2 / 910)	--	--	--	--
	B6EMMX36K-B	669566	--	--	--	669566 (6 / 1155)	--	--	--
	B6EMMX42K-B	669567	--	--	--	--	669567 (4 / 1265)	--	--
	B6EMMX48K-C	669852	--	--	--	--	669852 (5 / 1465)	669852 (3 / 1430)	--
	B6EMMX60K-C	669578	--	--	--	--	--	--	669578 (0 / 1605)
	B6VM								
	B6VMAX24K-A	669564	669564 (30 / 550)	669564 (29 / 700)	--	--	--	--	--
	B6VMAX24K-B	669564	669564 (30 / 525)	669564 (29 / 700)	--	--	--	--	--
	B6VMAX30K-A	669565	--	--	669565 (36 / 950)	--	--	--	--
	B6VMAX30K-B	669565	--	669565 (29 / 700)	669565 (36 / 950)	--	--	--	--
	B6VMAX36K-B	669566	--	--	--	669566 (31 / 1100)	--	--	--
	B6VMAX42K-B	669567	--	--	--	--	669567 (34 / 1250)	--	--
	B6VMAX48K-C	669568	--	--	--	--	669568 (34 / 1250)	669568 (36 / 1400)	--
	B6VMAX60K-C	669578	--	--	--	--	--	--	669578 (36 / 1600)
	B6VMMX								
	B6VMMX24K-A	669564	669564 (0 / 670)	669564 (0 / 740)	--	--	--	--	--
	B6VMMX24K-B	669564	669564 (0 / 530)	669564 (0 / 690)	--	--	--	--	--
	B6VMMX30K-A	669565	--	--	669565 (2 / 960)	--	--	--	--
	B6VMMX30K-B	669565	--	--	669565 (2 / 910)	--	--	--	--
B6VMMX36K-B	669566	--	--	--	669566 (6 / 1155)	--	--	--	
B6VMMX42K-B	669567	--	--	--	--	669567 (4 / 1265)	--	--	
B6VMMX48K-C	669568	--	--	--	--	669852 (5 / 1465)	669852 (3 / 1430)	--	
B6VMMX60K-C	669578	--	--	--	--	--	--	669578 (0 / 1605)	

NOTES:

- The charges listed are only valid for the standard 15' lineset.
- Numbers listed as 0.*** are restrictor diameters, while numbers listed as 669*** are TXV part numbers.

Table 4. Restrictor or TXV / Charge Addition (Oz) - Continued

Instructions:

1. Find the column for the model of outdoor unit that is being installed.
2. Find the row for the model of the indoor unit that is being installed.
3. Find the cell in the table in which this row and column meet. In this cell the appropriate orifice / TXV and charge addition for this match are listed. If the text in this cell is BOLD, then a change of orifice is necessary.
4. If a change in restrictor is necessary, then the appropriate restrictor will already be supplied with the outdoor unit.

Examples:

- For the *SA4BD030KB / B4VM-X30K-B match, the appropriate TXV is the 669565 and 36 ounces of charge will need to be added. (CHANGE IN CHARGE)
- For the *SA4BD024KB / B6EMMX24K-B match, the appropriate TXV is the 669564 and no additional charge needs to be added. (NO CHANGES ARE NECESSARY)

ID RESTRICTOR INSTALLED WITH ID UNIT	MODEL NUMBER: *SA4BD-		018KB	024KB	030KB	036KB	042KB	048KB	060KB
	ID RESTRICTOR SUPPLIED WITH OD UNIT:		0.048	0.056	0.060, 0.061	0.065, 0.067	0.071, 0.072	0.076, 0.077	0.087
	OUTDOOR UNIT BOM CHARGE (OZ.)		40.4	41	40	41	59	60	69.6
	MODELS	SUPPLIED WITH ID	REQUIRED RESTRICTOR OR TXV (CHARGE ADDITION (OZ) / RATED AIRFLOW (SCFM))						
	C6								
	C6B(A,H)-X24(C,U)-A	669564	669564 (30 / 530)	669564 (29 / 700)	--	--	--	--	--
	C6B(A,H)-X24(C,U)-B	669681	669681 (30 / 600)	669681 (29 / 700)	--	--	--	--	--
	C6B(A,H)-X30(C,U)-A	669565	--	--	669565 (36 / 950)	--	--	--	--
	C6B(A,H)-X30(C,U)-B	669682	--	--	669682 (36 / 950)	--	--	--	--
	C6B(A,H)-X30(C,U)-C	669682	--	--	669682 (36 / 1000)	--	--	--	--
	C6B(A,H)-X35(C,U)-A	669566	--	--	--	669566 (31 / 950)	--	--	--
	C6B(A,H)-X35(C,U)-B	669683	--	--	--	669683 (31 / 950)	--	--	--
	C6B(A,H)-X36(C,U)-B	669683	--	--	--	669683 (31 / 1100)	--	--	--
	C6B(A,H)-X36(C,U)-C	669683	--	--	--	669683 (31 / 1100)	--	--	--
	C6B(A,H)-X42(C,U)-B	669684	--	--	--	--	669684 (34 / 1250)	--	--
	C6B(A,H)-X42(C,U)-C	669684	--	--	--	--	669684 (34 / 1250)	--	--
	C6B(A,H)-X42(C,U)-D	669684	--	--	--	--	669684 (34 / 1250)	--	--
	C6B(A,H)-X47(C,U)-C	669852	--	--	--	--	--	669852 (36 / 1600)	--
	C6B(A,H)-X48(C,U)-C	669852	--	--	--	--	--	669852 (36 / 1600)	--
	C6B(A,H)-X48(C,U)-D	669852	--	--	--	--	--	669852 (36 / 1600)	--
	C6B(A,H)-X60(C,U)-C	669686	--	--	--	--	--	--	669686 (36 / 1600)
	C6B(A,H)-X60(C,U)-D	669686	--	--	--	--	--	--	669686 (36 / 1600)

NOTES:

- The charges listed are only valid for the standard 15' lineset.
- Numbers listed as 0.*** are restrictor diameters, while numbers listed as 669*** are TXV part numbers.

Table 4. Restrictor or TXV / Charge Addition (Oz) - Continued

ID RESTRICTOR INSTALLED WITH ID UNIT	MODEL NUMBER: *SA4BD-		018KB	024KB	030KB	036KB	042KB	048KB	060KB
	ID RESTRICTOR SUPPLIED WITH OD UNIT:		0.048	0.056	0.060, 0.061	0.065, 0.067	0.071, 0.072	0.076, 0.077	0.087
	OUTDOOR UNIT BOM CHARGE (OZ.)		40.4	41	40	41	59	60	69.6
	MODELS	SUPPLIED WITH ID	REQUIRED RESTRICTOR OR TXV (CHARGE ADDITION (OZ) / RATED AIRFLOW (SCFM))						
	C7-0								
	C7B(A,H)M01824(C,U)-A	0.048	0.048 (0 / 605)	0.056 (0 / 700)	--	--	--	--	--
	C7B(A,H)M01824(C,U)-B	0.055	0.048 (0 / 535)	0.055 (5 / 700)	--	--	--	--	--
	C7B(A,H)M030(C,U)-C	0.061	--	--	0.061 (0 / 960)	--	--	--	--
	C7B(A,H)M03036(C,U)-A	0.061	--	--	0.061 (0 / 960)	0.067 (10 / 1055)	--	--	--
	C7B(A,H)M03036(C,U)-B	0.067	--	--	0.061 (0 / 960)	0.067 (10 / 1055)	--	--	--
	C7B(A,H)M03642(C,U)-B	0.071	--	--	--	0.067 (10 / 1055)	0.071 (7 / 1290)	--	--
	C7B(A,H)M03648(C,U)-C	0.067	--	--	--	0.067 (10 / 1055)	0.071 (7 / 1290)	0.076 (0 / 1415)	--
	C7B(A,H)M042(C,U)-D	0.071	--	--	--	--	0.071 (7 / 1290)	--	--
	C7B(A,H)M048(C,U)-C	0.077	--	--	--	--	--	0.077 (6 / 1305)	--
	C7B(A,H)M048(C,U)-D	0.077	--	--	--	--	--	0.077 (6 / 1305)	--
	C7B(A,H)M060(C,U)-C	0.083	--	--	--	--	--	--	0.083 (12 / 1445)
	C7B(A,H)M060(C,U)-D	0.083	--	--	--	--	--	--	0.083 (12 / 1445)
	C7-X								
	C7B(A,H)MX24(C,U)-A	669681	669681 (0 / 650)	669681 (0 / 695)	--	--	--	--	--
	C7B(A,H)MX24(C,U)-B	669681	669681 (0 / 530)	669681 (0 / 700)	--	--	--	--	--
	C7B(A,H)MX30(C,U)-A	669682	--	--	669682 (0 / 955)	--	--	--	--
	C7B(A,H)MX30(C,U)-B	669682	--	--	669682 (0 / 955)	--	--	--	--
	C7B(A,H)MX30(C,U)-C	669682	--	--	669682 (0 / 970)	--	--	--	--
	C7B(A,H)MX36(C,U)-B	669683	--	--	--	669683 (0 / 1100)	--	--	--
	C7B(A,H)MX36(C,U)-C	669683	--	--	--	669683 (0 / 1100)	--	--	--
	C7B(A,H)MX42(C,U)-B	669684	--	--	--	--	669684 (5 / 1245)	--	--
	C7B(A,H)MX42(C,U)-C	669684	--	--	--	--	669684 (5 / 1245)	--	--
	C7B(A,H)MX48(C,U)-C	669852	--	--	--	--	--	669852 (0 / 1400)	--
C7B(A,H)MX48(C,U)-D	669852	--	--	--	--	--	669852 (0 / 1400)	--	
C7B(A,H)MX60(C,U)-C	669686	--	--	--	--	--	--	669686 (4 / 1695)	
C7B(A,H)MX60(C,U)-D	669686	--	--	--	--	--	--	669686 (4 / 1695)	

NOTES:

- The charges listed are only valid for the standard 15' lineset.
- Numbers listed as 0.*** are restrictor diameters, while numbers listed as 669*** are TXV part numbers.

Table 4. Restrictor or TXV / Charge Addition (Oz) - Continued

