


# WIRING DIAGRAM

H5HK030S-01 & H5HK035S-01

30KW & 35KW, 1-STAGE, 480 VAC, 3-PHASE HEATER KIT

**NOTES:**

1. If any of the original wire supplied with this unit must be replaced, it must be replaced with wiring material of the same gauge size and temperature rating,
2. The installation of this heater kit may require a change in the blower speed. See Installation Instructions for details.
3. Use copper conductors with minimum temperature rating of 60c for supply connections.

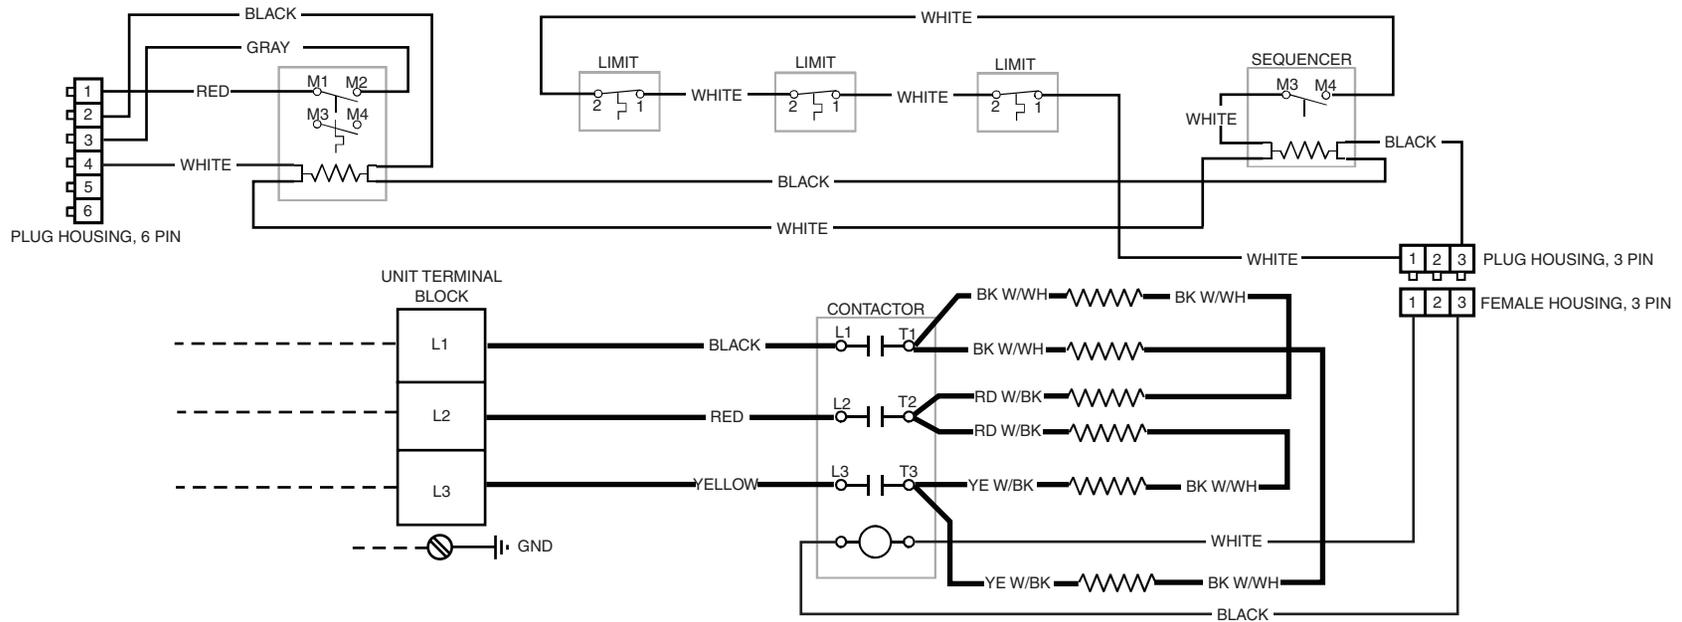

**LEGEND:**

FIELD WIRING	----
LOW VOLTAGE	————
HIGH VOLTAGE	————



**710102B**  
(Replaces 710102A)