

WIRING DIAGRAM

CMF2 Furnace Series




120 Volt

Single Phase / 60 Hz


NOTES:

1. Incoming power must be polarized. Observe color coding.
(See furnace data label for electrical information.)
2. If any of the original wires (as supplied with the appliance) must be replaced, use 105°C Thermoplastic type wire or its equivalent.
3. Use copper conductors only.

Model PGB-DI Power Gas Burner "Direct Ignition"

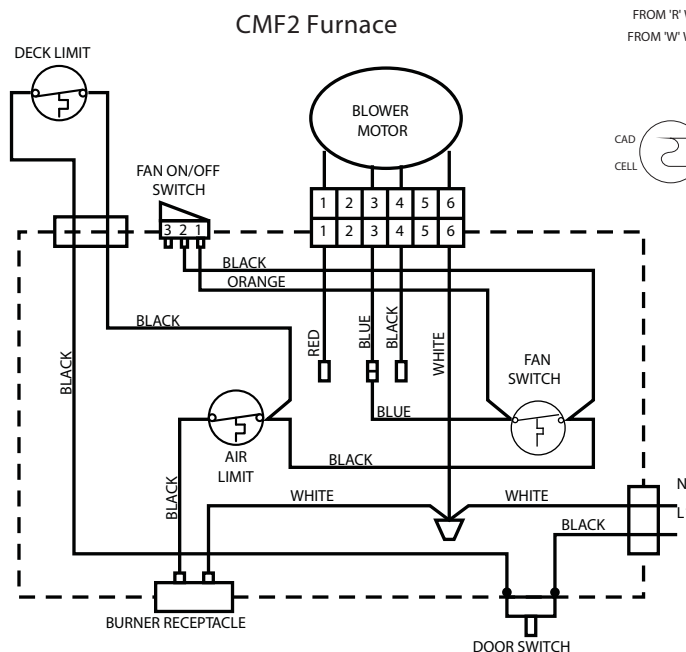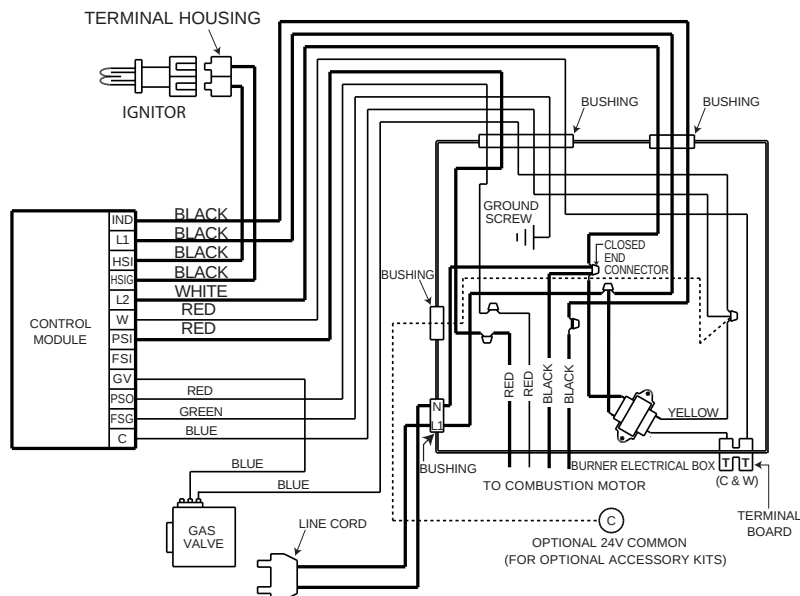

OIL GUN BURNER

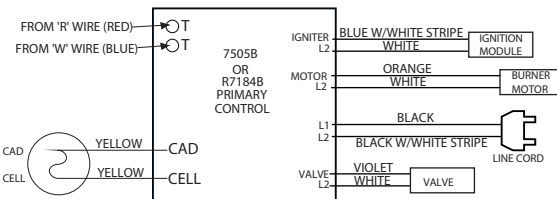

Blower speed Setting Shown is the High Speed (see table)

Blower Wire Color	Blower Speed
Red	Low
Blue	Med.
Black	High

LEGEND:

FIELD WIRING	---
LOW VOLTAGE	---
HIGH VOLTAGE	---



710972C
(Replaces 710972B)
06/15