

**MAYTAG®**

## TECHNICAL SPECIFICATIONS

*Model CSA4BF-K(B,C) Series*



M120 Product Line

**Extra High Efficiency Air Conditioner  
16 SEER — 2 - 5 Ton Capacity**


The CSA4BF-K(B,C) Series of Maytag air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a line of quality, 16 SEER split system cooling equipment.

## Features and Benefits


- **Copeland Scroll UltraTech™ Compressor** – The Ultra Tech Compressor operates with 2 stages of cooling capacity to provide superior comfort and efficiency. Copeland's proven and simple design equates to years of comfort and reliability for the homeowner with virtually silent operation.
- **Composite Base Pan** – Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **Low Pressure Switch** – Loss of charge protection ensures long compressor life. Auto-reset feature prevents nuisance service visits.
- **High Pressure Switch** – Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter Drier** – Included with unit, field installed.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Micro-Channel** – All aluminum coils in 2-4 ton models which provides high corrosion resistance.
- **Quiet Plus™ Sound Package** – Consists of a Quiet Plus compressor sound blanket and a swept wing fan blade. Both have been engineered to significantly reduce unwanted noise.

## DIMENSIONS/OUTDOOR SECTION

| CSA4BF | 024KB   | 036KB   | 048KC   | 060KC   |
|--------|---------|---------|---------|---------|
| H      | 33"     | 37"     | 41"     | 45"     |
| W      | 22 3/4" | 30 3/4" | 30 3/4" | 30 3/4" |
| D      | 22 3/4" | 30 3/4" | 30 3/4" | 30 3/4" |

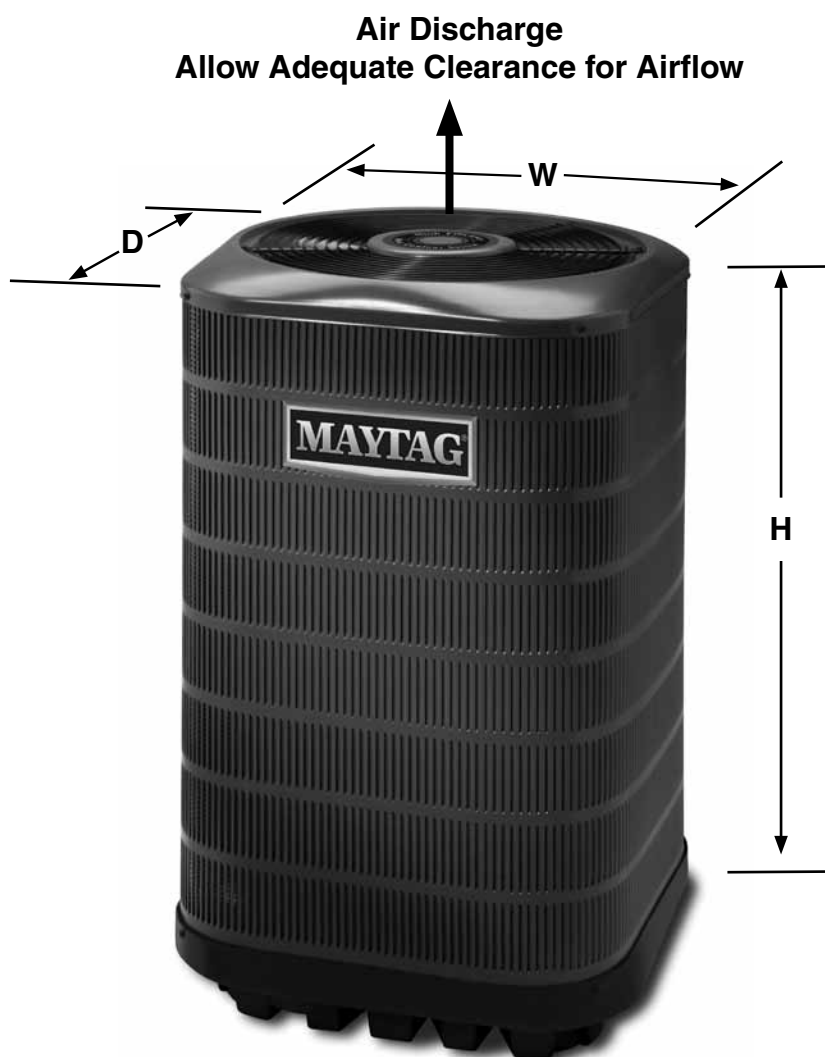

## IDENTIFICATION CODE

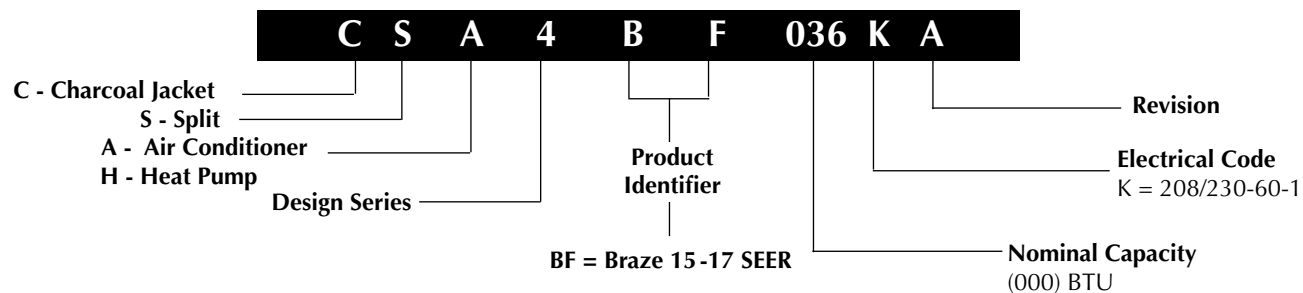

# PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

## 16 SEER — Extra High Efficiency — Single Phase

| Model Number CSA4BF       |                                                                                    |          | 024KB        | 036KB      | 048KC      | 060KC      |
|---------------------------|------------------------------------------------------------------------------------|----------|--------------|------------|------------|------------|
| Electrical Data           | Volts-Cycles-Phase (1)                                                             |          | 208/230-60-1 |            |            |            |
|                           | Total Amps                                                                         |          | 12.6         | 16.5       | 23.7       | 31.4       |
|                           | Delay Fuse Max. (2)                                                                |          | 25           | 35         | 50         | 60         |
|                           | Min. Circuit Ampacity                                                              |          | 15.5         | 20.3       | 29.0       | 38.6       |
| Component Data            | Coil                                                                               | Area     | 13.3         | 20.3       | 22.8       | 25.4       |
|                           |                                                                                    | Rows-FPI | 1-23         | 1-18       | 1-18       | 1-23       |
|                           |                                                                                    | Tube Dia | MC           |            |            | 3/8" OD    |
|                           | Fan Motor                                                                          | Type     | PSC          |            | BLDC       |            |
|                           |                                                                                    | Amps     | 0.9          | 1.3        | 2.6        | 2.6        |
|                           |                                                                                    | HP       | 0.13         | 0.25       | 0.33       | 0.33       |
|                           | Compressor Data                                                                    | RLA      | 11.6         | 15.2       | 21.1       | 28.8       |
|                           |                                                                                    | LRA      | 58.3         | 83.0       | 104.0      | 152.9      |
|                           | Refrigerant suction line O.D.<br>NOTE: Liquid line is 3/8" O.D. for entire length. |          | 0-24 ft.     | 3/4"       | 7/8"(4)    | 7/8"       |
| 25-39 ft.                 |                                                                                    |          | 7/8" (3)     | 1-1/8" (3) | 1-1/8" (3) | 1-1/8" (3) |
| 40-75 ft.                 |                                                                                    |          | 7/8" (3)     | 1-1/8" (3) | 1-1/8" (3) | 1-1/8" (3) |
| Approximate Weight (lbs.) |                                                                                    | Net      | 144          | 188        | 198        | 186        |
|                           |                                                                                    | Ship     | 151          | 197        | 207        | 195        |
| Sound Ratings db          |                                                                                    |          | 69           | 72         | 72         | 74         |

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 1-1/8" to 7/8" reducer from line to unit.

(4) Use of a 3/4" linset will result in approximately 2% loss in capacity.

(5) Additional charge for line sets above 15 feet.

Values based on suction line as follows with 3/8" liquid line.

a) 3/4" = 0.6 oz. per additional foot.

b) 7/8" = 0.7 oz. per additional foot.

c) 1 1/8" = 0.8 oz. per additional foot.

# SYSTEM HEATING & COOLING CAPACITIES

## 16 SEER — Extra High Efficiency — Single Phase

| Outdoor Unit<br>Number CSA4BF | Indoor Unit<br>Number C6BA/H- | High Speed<br>Capacity (BTU/h) | SEER | EER  | Low Speed<br>SCFM | High Speed<br>SCFM |
|-------------------------------|-------------------------------|--------------------------------|------|------|-------------------|--------------------|
| 024KB                         | X24(C,U)-B+MB7(E,V)M(*)B      | 24000                          | 16   | 13   | 645               | 840                |
| 036KB                         | X36(C,U)-B+MB7(E,V)M(*)B      | 36000                          | 16   | 13   | 810               | 1140               |
| 036KB                         | X36(C,U)-C+MB7(E,V)M(*)C      | 36000                          | 16   | 13   | 810               | 1140               |
| 048KC                         | X48(C,U)-C+MB7(E,V)M(*)C      | 47000                          | 16   | 13   | 975               | 1400               |
| 060KC                         | X60(C,U)-C+MB7(E,V)M(*)C      | 55000                          | 16   | 12.5 | 1120              | 1600               |

| Outdoor Unit<br>Number CSA4BF | Indoor Unit<br>Number B6VMA | High Speed<br>Capacity (BTU/h) | SEER | EER  | Low Speed<br>SCFM | High Speed<br>SCFM |
|-------------------------------|-----------------------------|--------------------------------|------|------|-------------------|--------------------|
| 024KB                         | X24K-B                      | 24000                          | 16   | 13   | 670               | 930                |
| 036KB                         | X36K-B                      | 36000                          | 16   | 13   | 810               | 1140               |
| 048KC                         | X48K-C                      | 47000                          | 16   | 13   | 975               | 1400               |
| 060KC                         | X60K-C                      | 55000                          | 16   | 12.5 | 1120              | 1600               |

Air handlers and coils used in tables are designed and manufactured by NORDYNE.

See current AHRI Directory for certified combinations and ratings.  
[www.ahridirectory.org](http://www.ahridirectory.org)

| COPPER WIRE SIZE — AWG<br>(1% Voltage Drop) |     |     |    |                            |
|---------------------------------------------|-----|-----|----|----------------------------|
| Supply Wire Length-Feet                     |     |     |    | Supply Circuit<br>Ampacity |
| 200                                         | 150 | 100 | 50 |                            |
| 6                                           | 8   | 10  | 14 | 15                         |
| 4                                           | 6   | 8   | 12 | 20                         |
| 4                                           | 6   | 8   | 10 | 25                         |
| 4                                           | 4   | 6   | 10 | 30                         |
| 3                                           | 4   | 6   | 8  | 35                         |
| 3                                           | 4   | 6   | 8  | 40                         |
| 2                                           | 3   | 4   | 6  | 45                         |
| 2                                           | 3   | 4   | 6  | 50                         |

Wire Size based on N.E.C. for 60° type copper conductors.

# EXPANDED COOLING PERFORMANCE - 2-STAGE AC SYSTEMS

CSA4BF024KB C6B(A,H)-X26(C,U)-B + VSB - High Speed

CSA4BF024KB B6VMAX24K-B - High Speed

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |       |      | 115°F |       |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C.  | K.W. | T.C.  | S.C.  | K.W. |
| 700   | 80     | 62     | 26.5 | 20.9 | 1.39 | 25.6 | 20.8 | 1.53 | 24.5 | 20.9 | 1.69 | 23.4 | 20.5 | 1.86 | 22.14 | 21.60 | 2.08 | 20.85 | 20.33 | 2.34 |
|       | 80     | 67     | 28.6 | 17.0 | 1.41 | 27.6 | 16.9 | 1.55 | 26.4 | 17.1 | 1.70 | 25.2 | 16.7 | 1.88 | 23.80 | 16.46 | 2.10 | 22.44 | 15.49 | 2.35 |
|       | 80     | 72     | 31.5 | 13.1 | 1.43 | 30.3 | 13.0 | 1.57 | 29.0 | 13.3 | 1.73 | 27.5 | 13.0 | 1.92 | 26.11 | 12.86 | 2.12 | 24.58 | 13.22 | 2.37 |
|       | 75     | 62     | 26.3 | 17.2 | 1.39 | 25.3 | 17.1 | 1.53 | 24.2 | 17.2 | 1.69 | 23.1 | 16.9 | 1.86 | 21.86 | 15.61 | 2.07 | 20.57 | 16.84 | 2.33 |
| 800   | 80     | 62     | 27.2 | 22.6 | 1.41 | 26.2 | 23.0 | 1.55 | 25.1 | 22.5 | 1.71 | 24.0 | 22.3 | 1.88 | 22.77 | 22.00 | 2.11 | 21.65 | 21.47 | 2.36 |
|       | 80     | 67     | 29.3 | 18.1 | 1.43 | 28.2 | 18.7 | 1.57 | 27.0 | 18.2 | 1.72 | 25.7 | 18.0 | 1.90 | 24.27 | 18.00 | 2.12 | 22.92 | 18.17 | 2.37 |
|       | 80     | 72     | 32.2 | 13.8 | 1.45 | 30.9 | 14.5 | 1.60 | 29.5 | 14.1 | 1.75 | 28.0 | 14.0 | 1.93 | 26.24 | 14.06 | 2.14 | 24.60 | 14.10 | 2.39 |
|       | 75     | 62     | 26.9 | 18.4 | 1.41 | 25.9 | 18.9 | 1.55 | 24.8 | 18.4 | 1.70 | 23.7 | 18.4 | 1.88 | 22.38 | 18.29 | 2.09 | 21.00 | 18.20 | 2.35 |
| 900   | 80     | 62     | 28.2 | 25.0 | 1.44 | 27.1 | 25.1 | 1.58 | 25.9 | 24.1 | 1.73 | 24.7 | 23.5 | 1.91 | 23.51 | 22.71 | 2.13 | 22.32 | 22.22 | 2.38 |
|       | 80     | 67     | 29.9 | 19.6 | 1.45 | 28.8 | 19.8 | 1.59 | 27.5 | 19.3 | 1.74 | 26.1 | 19.2 | 1.93 | 24.70 | 19.28 | 2.14 | 23.27 | 19.38 | 2.39 |
|       | 80     | 72     | 32.6 | 14.9 | 1.47 | 31.2 | 15.2 | 1.61 | 29.5 | 14.8 | 1.77 | 28.0 | 14.7 | 1.95 | 26.48 | 14.65 | 2.16 | 24.93 | 14.81 | 2.40 |
|       | 75     | 62     | 27.9 | 20.4 | 1.43 | 26.8 | 20.6 | 1.57 | 25.6 | 20.1 | 1.73 | 24.4 | 20.0 | 1.90 | 22.98 | 19.79 | 2.13 | 21.58 | 19.81 | 2.37 |

CSA4BF024KB C6B(A,H)-X26(C,U)-B + VSB - Low Speed

CSA4BF024KB B6VMAX24K-B - Low Speed

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |       |      | 115°F |       |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C.  | K.W. | T.C.  | S.C.  | K.W. |
| 700   | 80     | 62     | 20.7 | 18.6 | 0.92 | 20.1 | 18.3 | 1.04 | 19.4 | 18.1 | 1.17 | 18.5 | 17.4 | 1.32 | 17.55 | 17.25 | 1.50 | 16.56 | 16.28 | 1.69 |
|       | 80     | 67     | 22.2 | 14.8 | 0.91 | 21.4 | 14.8 | 1.03 | 20.5 | 15.0 | 1.16 | 19.4 | 14.8 | 1.32 | 18.25 | 14.55 | 1.49 | 17.05 | 14.26 | 1.69 |
|       | 80     | 72     | 24.3 | 11.1 | 0.89 | 23.3 | 11.1 | 1.01 | 22.1 | 11.3 | 1.14 | 20.9 | 11.0 | 1.31 | 19.62 | 10.83 | 1.48 | 18.32 | 11.00 | 1.69 |
|       | 75     | 62     | 20.4 | 15.2 | 0.92 | 19.7 | 15.1 | 1.04 | 18.8 | 15.2 | 1.18 | 17.8 | 14.9 | 1.33 | 16.74 | 13.69 | 1.50 | 15.63 | 14.73 | 1.70 |
| 800   | 80     | 62     | 21.5 | 19.4 | 0.92 | 20.9 | 19.5 | 1.04 | 20.1 | 18.7 | 1.18 | 19.1 | 18.1 | 1.33 | 18.14 | 17.53 | 1.50 | 17.09 | 16.95 | 1.70 |
|       | 80     | 67     | 22.7 | 16.1 | 0.91 | 21.9 | 16.6 | 1.03 | 20.9 | 16.2 | 1.17 | 19.7 | 16.1 | 1.32 | 18.55 | 16.03 | 1.50 | 17.32 | 15.98 | 1.70 |
|       | 80     | 72     | 24.5 | 11.8 | 0.90 | 23.5 | 12.3 | 1.02 | 22.4 | 11.9 | 1.15 | 21.2 | 11.8 | 1.31 | 19.92 | 11.81 | 1.49 | 18.58 | 11.79 | 1.70 |
|       | 75     | 62     | 20.8 | 16.4 | 0.93 | 20.1 | 16.8 | 1.04 | 19.2 | 16.4 | 1.18 | 18.2 | 16.2 | 1.34 | 17.05 | 16.12 | 1.51 | 16.00 | 15.86 | 1.70 |
| 900   | 80     | 62     | 22.2 | 20.2 | 0.92 | 21.5 | 20.1 | 1.04 | 20.7 | 19.3 | 1.18 | 19.7 | 18.7 | 1.33 | 18.62 | 17.99 | 1.51 | 17.54 | 17.47 | 1.70 |
|       | 80     | 67     | 23.1 | 17.5 | 0.92 | 22.2 | 17.7 | 1.04 | 21.2 | 17.4 | 1.17 | 20.0 | 17.3 | 1.33 | 18.79 | 17.14 | 1.51 | 17.56 | 17.16 | 1.70 |
|       | 80     | 72     | 24.8 | 12.7 | 0.90 | 23.9 | 12.9 | 1.02 | 22.7 | 12.6 | 1.16 | 21.4 | 12.5 | 1.32 | 20.11 | 12.41 | 1.50 | 18.75 | 12.46 | 1.70 |
|       | 75     | 62     | 21.4 | 18.1 | 0.93 | 20.6 | 18.3 | 1.05 | 19.9 | 17.7 | 1.19 | 18.5 | 17.4 | 1.34 | 17.43 | 16.85 | 1.51 | 16.38 | 16.31 | 1.71 |

CSA4BF036KB C6B(A,H)-X36(C,U)-B + VSB - High Speed

CSA4BF036KB B6VMAX36K-B - High Speed

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |       |      | 115°F |       |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C.  | K.W. | T.C.  | S.C.  | K.W. |
| 1050  | 80     | 62     | 39.0 | 31.3 | 2.11 | 37.5 | 31.1 | 2.30 | 35.9 | 31.3 | 2.50 | 34.2 | 30.7 | 2.77 | 32.41 | 31.86 | 3.07 | 30.67 | 30.15 | 3.40 |
|       | 80     | 67     | 42.4 | 25.4 | 2.15 | 40.6 | 25.3 | 2.32 | 38.8 | 25.7 | 2.55 | 36.9 | 25.2 | 2.80 | 34.95 | 24.90 | 3.09 | 32.84 | 23.54 | 3.42 |
|       | 80     | 72     | 46.3 | 19.4 | 2.20 | 44.3 | 19.3 | 2.37 | 42.4 | 19.7 | 2.58 | 40.4 | 19.4 | 2.83 | 38.24 | 19.11 | 3.11 | 35.91 | 19.59 | 3.44 |
|       | 75     | 62     | 38.8 | 26.0 | 2.11 | 37.2 | 25.8 | 2.29 | 35.6 | 26.0 | 2.50 | 33.8 | 25.5 | 2.77 | 32.03 | 23.51 | 3.07 | 30.05 | 25.24 | 3.40 |
| 1200  | 80     | 62     | 40.1 | 33.9 | 2.16 | 38.5 | 34.5 | 2.33 | 36.8 | 33.8 | 2.55 | 35.2 | 33.2 | 2.81 | 33.60 | 32.47 | 3.11 | 31.84 | 31.57 | 3.45 |
|       | 80     | 67     | 43.2 | 27.5 | 2.19 | 41.4 | 28.3 | 2.36 | 39.5 | 27.6 | 2.58 | 37.6 | 27.3 | 2.83 | 35.60 | 27.36 | 3.12 | 33.45 | 27.35 | 3.46 |
|       | 80     | 72     | 47.2 | 20.6 | 2.24 | 45.1 | 21.5 | 2.42 | 43.2 | 20.9 | 2.63 | 41.1 | 20.8 | 2.86 | 38.85 | 20.97 | 3.15 | 36.43 | 21.11 | 3.48 |
|       | 75     | 62     | 39.7 | 27.9 | 2.15 | 38.1 | 28.6 | 2.33 | 36.4 | 27.9 | 2.54 | 34.5 | 27.5 | 2.81 | 32.67 | 27.48 | 3.10 | 30.64 | 27.37 | 3.44 |
| 1350  | 80     | 62     | 41.0 | 36.8 | 2.19 | 39.5 | 36.8 | 2.37 | 38.0 | 35.4 | 2.59 | 36.4 | 34.5 | 2.85 | 34.66 | 33.49 | 3.15 | 32.81 | 32.67 | 3.48 |
|       | 80     | 67     | 44.0 | 29.8 | 2.23 | 42.1 | 30.1 | 2.40 | 40.2 | 29.4 | 2.62 | 38.2 | 29.3 | 2.87 | 36.16 | 29.18 | 3.16 | 33.91 | 29.30 | 3.49 |
|       | 80     | 72     | 47.9 | 22.3 | 2.29 | 45.8 | 22.7 | 2.45 | 43.7 | 22.1 | 2.66 | 41.6 | 22.2 | 2.90 | 39.25 | 22.15 | 3.18 | 36.74 | 22.44 | 3.51 |
|       | 75     | 62     | 40.5 | 30.2 | 2.19 | 38.8 | 30.4 | 2.37 | 37.0 | 29.7 | 2.58 | 35.1 | 29.5 | 2.84 | 33.20 | 29.29 | 3.14 | 31.11 | 29.29 | 3.47 |

CSA4BF036KB C6B(A,H)-X36(C,U)-B + VSB - Low Speed

CSA4BF036KB B6VMAX36K-B - Low Speed

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |       |      | 115°F |       |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C.  | K.W. | T.C.  | S.C.  | K.W. |
| 1050  | 80     | 62     | 30.1 | 27.1 | 1.33 | 28.9 | 26.3 | 1.46 | 27.7 | 25.8 | 1.64 | 26.4 | 24.8 | 1.85 | 25.04 | 24.61 | 2.09 | 23.50 | 23.11 | 2.37 |
|       | 80     | 67     | 32.1 | 22.3 | 1.31 | 30.6 | 22.1 | 1.46 | 29.1 | 22.3 | 1.63 | 27.5 | 21.9 | 1.85 | 25.81 | 21.56 | 2.09 | 23.95 | 21.27 | 2.37 |
|       | 80     | 72     | 35.1 | 16.5 | 1.29 | 33.5 | 16.4 | 1.44 | 31.8 | 16.7 | 1.62 | 30.0 | 16.4 | 1.83 | 27.98 | 16.08 | 2.09 | 25.89 | 16.27 | 2.38 |
|       | 75     | 62     | 29.3 | 22.5 | 1.33 | 27.9 | 22.3 | 1.47 | 26.5 | 22.4 | 1.65 | 25.0 | 22.0 | 1.86 | 23.50 | 20.11 | 2.10 | 21.88 | 21.51 | 2.38 |
| 1200  | 80     | 62     | 31.3 | 28.2 | 1.34 | 30.0 | 28.0 | 1.48 | 28.7 | 26.8 | 1.65 | 27.4 | 25.9 | 1.86 | 25.92 | 25.05 | 2.11 | 24.27 | 24.06 | 2.39 |
|       | 80     | 67     | 32.7 | 24.1 | 1.32 | 31.2 | 24.7 | 1.47 | 29.6 | 24.1 | 1.65 | 28.0 | 23.9 | 1.86 | 26.26 | 23.82 | 2.11 | 24.33 | 23.66 | 2.39 |
|       | 80     | 72     | 35.5 | 17.7 | 1.30 | 33.8 | 18.3 | 1.45 | 32.1 | 17.8 | 1.63 | 30.3 | 17.6 | 1.85 | 28.40 | 17.65 | 2.11 | 26.26 | 17.66 | 2.40 |
|       | 75     | 62     | 29.9 | 24.4 | 1.35 | 28.5 | 24.8 | 1.48 | 27.1 | 24.3 | 1.66 | 25.6 | 23.9 | 1.87 | 24.14 | 23.32 | 2.11 | 22.59 | 22.40 | 2.39 |
| 1350  | 80     | 62     | 32.3 | 29.4 | 1.34 | 31.0 | 28.9 | 1.49 | 29.6 | 27.6 | 1.66 | 28.2 | 26.8 | 1.88 | 26.65 | 25.75 | 2.12 | 24.84 | 24.74 | 2.42 |
|       | 80     | 67     | 33.2 | 26.3 | 1.34 | 31.7 | 26.5 | 1.48 | 30.1 | 25.9 | 1.66 | 28.4 | 25.8 | 1.88 | 26.70 | 25.53 | 2.12 | 24.86 | 24.75 | 2.42 |
|       | 80     | 72     | 35.9 | 19.1 | 1.31 | 34.2 | 19.4 | 1.46 | 32.5 | 18.9 | 1.65 | 30.7 | 18.9 | 1.87 | 28.67 | 18.79 | 2.13 | 26.55 | 18.85 | 2.41 |
|       | 75     | 62     | 30.4 | 26.5 | 1.36 | 29.0 | 26.6 | 1.50 | 27.6 | 25.8 | 1.68 | 26.3 | 24.9 | 1.89 | 24.79 | 23.96 | 2.13 | 23.16 | 23.07 | 2.41 |

# EXPANDED COOLING PERFORMANCE - 2-STAGE AC SYSTEMS

CSA4BF048KC C6B(A,H)-X48(C,U)-C + VSB - High Speed

CSA4BF048KC B6VMAX48K-C - High Speed

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |       |      | 115°F |       |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C.  | K.W. | T.C.  | S.C.  | K.W. |
| 1400  | 80     | 62     | 50.3 | 40.7 | 2.66 | 48.3 | 40.4 | 2.94 | 46.2 | 40.6 | 3.24 | 43.9 | 39.8 | 3.58 | 41.59 | 40.89 | 3.99 | 39.47 | 38.80 | 4.45 |
|       | 80     | 67     | 54.2 | 33.0 | 2.70 | 52.0 | 32.8 | 2.97 | 49.7 | 33.1 | 3.27 | 47.3 | 32.7 | 3.62 | 44.61 | 32.15 | 4.02 | 41.96 | 30.63 | 4.49 |
|       | 80     | 72     | 59.2 | 25.1 | 2.73 | 56.8 | 25.0 | 3.00 | 54.2 | 25.5 | 3.31 | 51.5 | 25.0 | 3.66 | 48.56 | 24.59 | 4.06 | 45.63 | 25.23 | 4.54 |
|       | 75     | 62     | 49.9 | 33.8 | 2.65 | 47.9 | 33.5 | 2.93 | 45.8 | 33.7 | 3.23 | 43.4 | 33.0 | 3.58 | 41.01 | 30.46 | 3.98 | 38.57 | 32.65 | 4.44 |
| 1600  | 80     | 62     | 51.6 | 44.0 | 2.72 | 49.6 | 44.8 | 2.99 | 47.4 | 43.7 | 3.29 | 45.3 | 42.8 | 3.64 | 43.10 | 41.64 | 4.05 | 40.86 | 40.52 | 4.52 |
|       | 80     | 67     | 55.4 | 35.6 | 2.74 | 53.2 | 36.6 | 3.02 | 50.7 | 35.7 | 3.32 | 48.1 | 35.3 | 3.67 | 45.38 | 35.27 | 4.07 | 42.66 | 35.26 | 4.54 |
|       | 80     | 72     | 60.3 | 26.6 | 2.78 | 57.8 | 27.8 | 3.05 | 55.1 | 27.0 | 3.36 | 52.2 | 26.8 | 3.71 | 49.22 | 26.96 | 4.12 | 46.16 | 27.16 | 4.59 |
|       | 75     | 62     | 51.0 | 36.2 | 2.71 | 49.0 | 37.0 | 2.99 | 46.8 | 36.1 | 3.29 | 44.3 | 35.6 | 3.63 | 41.75 | 35.45 | 4.03 | 39.21 | 35.32 | 4.49 |
| 1800  | 80     | 62     | 52.7 | 47.5 | 2.77 | 50.9 | 47.4 | 3.04 | 48.8 | 45.5 | 3.35 | 46.6 | 44.3 | 3.70 | 44.34 | 42.84 | 4.10 | 41.99 | 41.81 | 4.58 |
|       | 80     | 67     | 56.3 | 38.5 | 2.79 | 54.0 | 38.9 | 3.07 | 51.4 | 38.0 | 3.37 | 48.8 | 37.8 | 3.72 | 46.00 | 37.54 | 4.12 | 43.19 | 37.70 | 4.59 |
|       | 80     | 72     | 61.1 | 28.7 | 2.82 | 58.5 | 29.3 | 3.10 | 55.7 | 28.5 | 3.41 | 52.6 | 28.5 | 3.76 | 49.45 | 28.45 | 4.16 | 46.33 | 28.78 | 4.63 |
|       | 75     | 62     | 51.9 | 39.0 | 2.77 | 49.8 | 39.3 | 3.04 | 47.5 | 38.4 | 3.34 | 45.0 | 38.1 | 3.68 | 42.37 | 37.71 | 4.08 | 39.84 | 37.72 | 4.55 |

CSA4BF048KC C6B(A,H)-X48(C,U)-C + VSB - Low Speed

CSA4BF048KC B6VMAX48K-C - Low Speed

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |       |      | 115°F |       |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C.  | K.W. | T.C.  | S.C.  | K.W. |
| 1400  | 80     | 62     | 38.5 | 34.7 | 1.62 | 37.2 | 33.9 | 1.86 | 35.7 | 33.3 | 2.13 | 33.9 | 31.8 | 2.45 | 31.94 | 31.40 | 2.79 | 29.87 | 29.37 | 3.17 |
|       | 80     | 67     | 41.0 | 28.4 | 1.60 | 39.3 | 28.3 | 1.84 | 37.4 | 28.5 | 2.13 | 35.2 | 27.9 | 2.45 | 32.85 | 27.40 | 2.79 | 30.43 | 26.99 | 3.16 |
|       | 80     | 72     | 44.4 | 21.0 | 1.58 | 42.6 | 21.0 | 1.83 | 40.4 | 21.2 | 2.13 | 38.1 | 20.8 | 2.44 | 35.64 | 20.34 | 2.77 | 33.00 | 20.59 | 3.15 |
|       | 75     | 62     | 37.5 | 28.8 | 1.62 | 36.0 | 28.6 | 1.87 | 34.2 | 28.7 | 2.14 | 32.2 | 28.1 | 2.44 | 29.94 | 25.39 | 2.80 | 27.74 | 27.21 | 3.18 |
| 1600  | 80     | 62     | 40.0 | 36.0 | 1.63 | 38.6 | 36.0 | 1.87 | 37.0 | 34.5 | 2.15 | 35.0 | 33.1 | 2.47 | 33.00 | 31.89 | 2.81 | 30.83 | 30.57 | 3.18 |
|       | 80     | 67     | 41.8 | 30.7 | 1.62 | 40.0 | 31.4 | 1.87 | 38.0 | 30.7 | 2.15 | 35.8 | 30.3 | 2.47 | 33.43 | 30.17 | 2.81 | 31.01 | 29.89 | 3.18 |
|       | 80     | 72     | 45.1 | 22.4 | 1.60 | 43.3 | 23.3 | 1.85 | 41.0 | 22.6 | 2.15 | 38.7 | 22.3 | 2.46 | 36.15 | 22.28 | 2.79 | 33.45 | 22.19 | 3.17 |
|       | 75     | 62     | 38.3 | 31.1 | 1.64 | 36.7 | 31.7 | 1.89 | 34.9 | 30.9 | 2.16 | 32.9 | 30.4 | 2.46 | 30.73 | 29.69 | 2.82 | 28.61 | 28.37 | 3.20 |
| 1800  | 80     | 62     | 41.2 | 37.5 | 1.64 | 39.7 | 37.0 | 1.89 | 38.0 | 35.4 | 2.17 | 36.0 | 34.2 | 2.49 | 33.89 | 32.74 | 2.83 | 31.63 | 31.49 | 3.20 |
|       | 80     | 67     | 42.4 | 33.3 | 1.64 | 40.6 | 33.6 | 1.89 | 38.6 | 32.9 | 2.17 | 36.3 | 32.6 | 2.49 | 34.00 | 32.17 | 2.83 | 31.64 | 31.51 | 3.20 |
|       | 80     | 72     | 45.7 | 24.1 | 1.62 | 43.8 | 24.6 | 1.88 | 41.5 | 23.9 | 2.17 | 39.1 | 23.8 | 2.48 | 36.56 | 23.57 | 2.81 | 33.83 | 23.60 | 3.19 |
|       | 75     | 62     | 38.9 | 33.6 | 1.66 | 37.4 | 33.8 | 1.90 | 35.5 | 32.9 | 2.18 | 33.6 | 31.9 | 2.49 | 31.50 | 30.44 | 2.84 | 29.31 | 29.18 | 3.22 |

CSA4BF060KC with C6B(A,H)-X60(C,U)-C + VSB - High Speed

CSA4BF060KC with B6VMAX60K-C - High Speed

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |       |      | 115°F |       |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C.  | K.W. | T.C.  | S.C.  | K.W. |
| 1450  | 80     | 62     | 56.8 | 43.7 | 3.24 | 54.6 | 43.4 | 3.54 | 52.4 | 43.6 | 3.90 | 50.0 | 42.9 | 4.33 | 47.56 | 45.15 | 4.81 | 44.96 | 42.68 | 5.36 |
|       | 80     | 67     | 61.9 | 35.7 | 3.26 | 59.5 | 35.4 | 3.56 | 57.0 | 35.9 | 3.93 | 54.3 | 35.2 | 4.35 | 51.57 | 34.80 | 4.85 | 48.58 | 32.72 | 5.40 |
|       | 80     | 72     | 67.7 | 27.6 | 3.27 | 65.0 | 27.5 | 3.58 | 62.4 | 28.1 | 3.95 | 59.5 | 27.6 | 4.39 | 56.52 | 27.23 | 4.88 | 53.36 | 28.01 | 5.45 |
|       | 75     | 62     | 56.6 | 36.3 | 3.23 | 54.3 | 36.0 | 3.54 | 52.0 | 36.3 | 3.90 | 49.6 | 35.6 | 4.32 | 47.19 | 33.33 | 4.81 | 44.51 | 35.70 | 5.36 |
| 1600  | 80     | 62     | 58.0 | 46.2 | 3.28 | 55.7 | 47.1 | 3.59 | 53.4 | 46.1 | 3.95 | 51.0 | 45.6 | 4.37 | 48.46 | 45.55 | 4.86 | 45.85 | 45.35 | 5.41 |
|       | 80     | 67     | 62.9 | 37.5 | 3.30 | 60.4 | 38.6 | 3.61 | 57.8 | 37.7 | 3.97 | 55.0 | 37.4 | 4.40 | 52.21 | 37.50 | 4.89 | 49.32 | 37.85 | 5.45 |
|       | 80     | 72     | 68.9 | 28.8 | 3.31 | 66.2 | 30.1 | 3.63 | 63.4 | 29.3 | 4.00 | 60.4 | 29.1 | 4.43 | 57.33 | 29.33 | 4.93 | 54.06 | 29.61 | 5.50 |
|       | 75     | 62     | 57.5 | 38.2 | 3.28 | 55.3 | 39.1 | 3.59 | 52.9 | 38.1 | 3.95 | 50.5 | 38.0 | 4.37 | 47.92 | 37.94 | 4.86 | 45.18 | 37.87 | 5.40 |
| 1750  | 80     | 62     | 59.0 | 49.2 | 3.33 | 56.7 | 49.5 | 3.63 | 54.3 | 48.5 | 4.00 | 51.8 | 48.2 | 4.42 | 49.41 | 47.62 | 4.91 | 47.04 | 46.84 | 5.47 |
|       | 80     | 67     | 63.8 | 39.9 | 3.34 | 61.2 | 40.5 | 3.66 | 58.5 | 39.5 | 4.02 | 55.8 | 39.4 | 4.45 | 52.94 | 39.53 | 4.94 | 49.86 | 39.80 | 5.50 |
|       | 80     | 72     | 69.8 | 30.6 | 3.36 | 67.0 | 31.3 | 3.67 | 64.1 | 30.4 | 4.04 | 61.1 | 30.5 | 4.48 | 57.91 | 30.46 | 4.98 | 54.56 | 30.97 | 5.55 |
|       | 75     | 62     | 58.5 | 40.5 | 3.32 | 56.1 | 41.1 | 3.63 | 53.7 | 40.2 | 3.99 | 51.2 | 40.0 | 4.41 | 48.55 | 39.68 | 4.90 | 45.73 | 39.80 | 5.45 |

CSA4BF060KC with C6B(A,H)-X60(C,U)-C + VSB - Low Speed

CSA4BF060KC with B6VMAX60K-C - Low Speed

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |       |      | 115°F |       |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|------|-------|-------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C.  | K.W. | T.C.  | S.C.  | K.W. |
| 970   | 80     | 62     | 39.3 | 29.1 | 1.98 | 37.9 | 29.3 | 2.28 | 36.2 | 29.5 | 2.62 | 34.4 | 28.9 | 3.00 | 32.38 | 30.53 | 3.45 | 30.29 | 28.55 | 3.93 |
|       | 80     | 67     | 43.1 | 24.1 | 1.95 | 41.3 | 23.9 | 2.26 | 39.5 | 24.2 | 2.60 | 37.4 | 23.7 | 3.00 | 35.27 | 23.27 | 3.43 | 32.94 | 21.62 | 3.91 |
|       | 80     | 72     | 47.3 | 18.9 | 1.92 | 45.4 | 18.8 | 2.23 | 43.2 | 19.1 | 2.59 | 41.1 | 18.7 | 2.97 | 38.82 | 18.35 | 3.40 | 36.33 | 18.77 | 3.89 |
|       | 75     | 62     | 39.2 | 24.5 | 1.98 | 37.6 | 24.3 | 2.29 | 36.0 | 24.4 | 2.62 | 34.2 | 23.9 | 3.00 | 32.07 | 21.82 | 3.45 | 29.94 | 23.48 | 3.93 |
| 1120  | 80     | 62     | 41.6 | 33.2 | 1.98 | 39.9 | 33.8 | 2.29 | 38.1 | 33.1 | 2.63 | 36.1 | 32.7 | 3.02 | 34.06 | 32.50 | 3.46 | 32.09 | 31.82 | 3.94 |
|       | 80     | 67     | 45.2 | 26.9 | 1.95 | 43.3 | 27.7 | 2.26 | 41.2 | 27.0 | 2.61 | 39.0 | 26.6 | 3.01 | 36.79 | 26.62 | 3.44 | 34.38 | 26.76 | 3.92 |
|       | 80     | 72     | 49.6 | 20.7 | 1.92 | 47.5 | 21.6 | 2.24 | 45.2 | 20.9 | 2.60 | 42.9 | 20.7 | 2.98 | 40.39 | 20.79 | 3.41 | 37.71 | 20.87 | 3.90 |
|       | 75     | 62     | 41.3 | 27.4 | 1.98 | 39.6 | 28.0 | 2.29 | 37.8 | 27.5 | 2.63 | 35.9 | 27.1 | 3.02 | 33.62 | 26.92 | 3.46 | 31.33 | 26.74 | 3.94 |
| 1270  | 80     | 62     | 42.8 | 36.3 | 1.99 | 41.0 | 36.4 | 2.30 | 39.1 | 35.6 | 2.64 | 37.2 | 35.2 | 3.04 | 35.35 | 34.15 | 3.47 | 33.33 | 33.19 | 3.95 |
|       | 80     | 67     | 46.3 | 29.3 | 1.96 | 44.3 | 29.6 | 2.28 | 42.2 | 28.9 | 2.63 | 40.0 | 29.0 | 3.02 | 37.58 | 28.73 | 3.45 | 35.03 | 28.80 | 3.94 |
|       | 80     | 72     | 50.7 | 22.4 | 1.93 | 48.4 | 22.8 | 2.25 | 46.1 | 22.1 | 2.61 | 43.7 | 22.1 | 3.00 | 41.07 | 22.00 | 3.43 | 38.25 | 22.24 | 3.92 |
|       | 75     | 62     | 42.4 | 29.9 | 1.99 | 40.6 | 30.2 | 2.30 | 38.7 | 29.4 | 2.65 | 36.5 | 29.2 | 3.04 | 34.35 | 28.84 | 3.48 | 31.99 | 28.78 | 3.96 |

## ACCESSORIES - CONDENSING UNIT

### Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

### Extreme Wind Condition Mounting Kit - 920900



For current Energy Star Information please refer to [www.energystar.gov](http://www.energystar.gov)

**MAYTAG**

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by Nortek Global HVAC LLC, O'Fallon, MO. ©Registered Trademark/™Trademark of Maytag Corporation or its related companies. © Nortek Global HVAC LLC 2015. All rights reserved.  
780D-0415 (Replaces 780D-0912)

Printed in U.S.A. (04/15)