

MAYTAG

TECHNICAL SPECIFICATIONS

Model CSA4BF-K(B,C) Series



M120 Product Line

**R-410A Extra High Efficiency Air Conditioner
16 SEER — 2 - 5 Ton Capacity**

- **12 YEAR ALL PARTS WARRANTY**
- **This product offers a 1 Year Dependability Promise to replace the unit if the compressor fails in the first year of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil to qualify.**
- **Product registration required for 12-year All Parts Warranty and 1 Year Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.**

Maytag now offers you the choice of an air conditioner that uses a more efficient and environmentally friendly refrigerant designated Smart Cool 410™ (R-410A). The CSA4BF-K(B,C) Series of Maytag air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a line of quality, 16 SEER split system cooling equipment.


Features and Benefits

- **Smart Cool 410™ Refrigerant (R-410A)** – Earth friendly non-ozone depleting refrigerant.
- **Copeland Scroll Ultra Tech™ Compressor** – The Ultra Tech Compressor operates with 2 stages of cooling capacity to provide superior comfort and efficiency. Copeland's proven and simple design equates to years of comfort and reliability for the homeowner with virtually silent operation.
- **Composite Base Pan** – Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **Low Pressure Switch** – Loss of charge protection ensures long compressor life. Auto-reset feature prevents nuisance service visits.
- **High Pressure Switch** – Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter Drier** – Included with unit, field installed.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Micro-Channel** – All aluminum coils in 2-4 ton models which provides high corrosion resistance.
- **Quiet Plus™ Sound Package** – Consists of a Quiet Plus compressor sound blanket and a swept wing fan blade. Both have been engineered to significantly reduce unwanted noise.




DIMENSIONS/OUTDOOR SECTION

CSA4BF	024KB	036KB	048KC	060KB
H	31 1/2"	35 1/2"	39 1/2"	43 1/2"
W	22 3/4"	30 3/4"	30 3/4"	30 3/4"
D	22 3/4"	30 3/4"	30 3/4"	30 3/4"

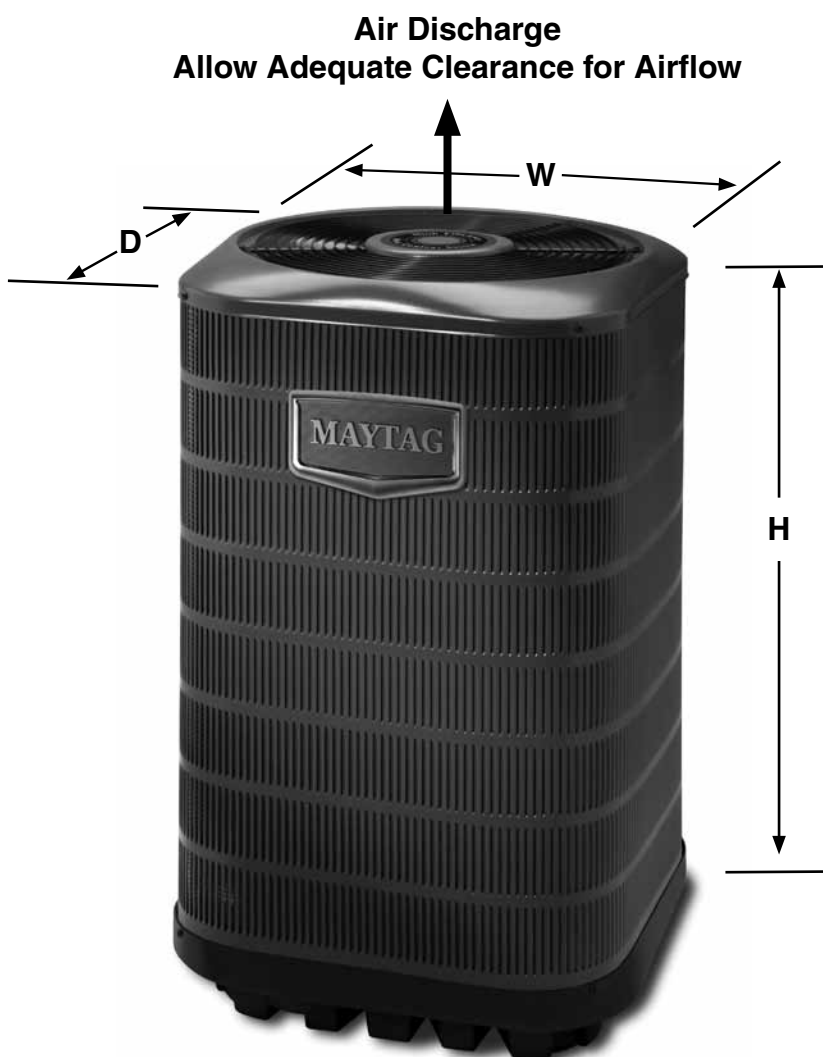

IDENTIFICATION CODE

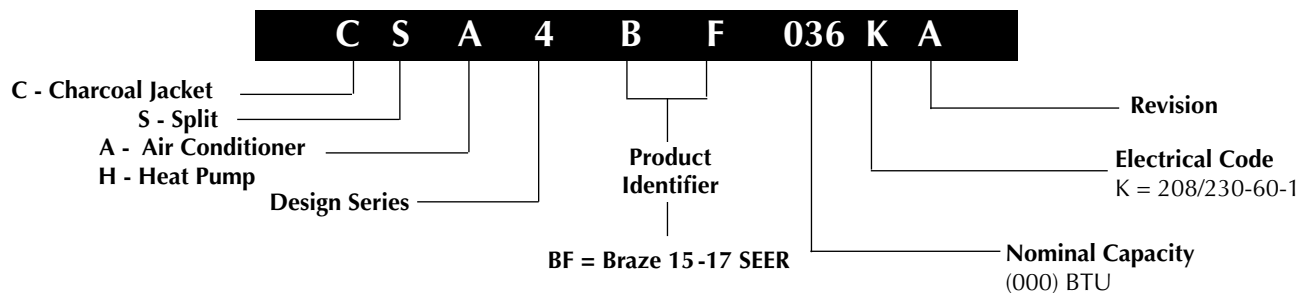

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

16 SEER — R-410A Extra High Efficiency — Single Phase

Model Number CSA4BF			024KB	036KB	048KC	060KB
Electrical Data	Volts-Cycles-Phase (1)		208/230-60-1			
	Total Amps		12.6	16.5	23.7	25.9
	Delay Fuse Max. (2)		25	35	50	50
	Min. Circuit Ampacity		15.5	20.3	29.0	31.7
Component Data	Coil	Area	13.3	20.3	22.8	25.4
		Rows-FPI	1-23	1-18	1-18	2-18
		Tube Dia	MC			3/8" OD
	Fan Motor	Type	PSC		BLDC	
		Amps	0.9	1.3	2.6	2.9
		HP	0.13	0.25	0.33	0.33
	Compressor Data	RLA	11.6	15.2	21.1	23.0
		LRA	58.3	83.0	104.0	118.0
Refrigerant suction line O.D. NOTE: Liquid line is 3/8" O.D. for entire length.		0-24 ft.	3/4"	7/8"(4)	7/8"	7/8"
		25-39 ft.	7/8" (3)	1-1/8" (3)	1-1/8" (3)	1-1/8" (3)
		40-75 ft.	7/8" (3)	1-1/8" (3)	1-1/8" (3)	1-1/8" (3)
Approximate Weight (lbs.)		Net	144	188	198	284
		Ship	151	197	207	296
Sound Ratings db			69	72	72	74

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 1-1/8" to 7/8" reducer from line to unit.

(4) Use of a 3/4" linset will result in approximately 2% loss in capacity.

(5) Additional charge for line sets above 15 feet.

Values based on suction line as follows with 3/8" liquid line.

a) 3/4" = 0.6 oz. per additional foot.

b) 7/8" = 0.7 oz. per additional foot.

c) 1 1/8" = 0.8 oz. per additional foot.

SYSTEM HEATING & COOLING CAPACITIES

16 SEER — Extra High Efficiency — Single Phase

Outdoor Unit Number CSA4BF	Indoor Unit Number C6BA/H-	High Speed Capacity (BTU/h)	SEER	EER	Low Speed SCFM	High Speed SCFM
024KB	X24(C,U)-B+MB7(E,V)M(*)B	24000	16	13	645	840
036KB	X36(C,U)-B+MB7(E,V)M(*)B	36000	16	13	810	1140
036KB	X36(C,U)-C+MB7(E,V)M(*)C	36000	16	13	810	1140
048KC	X48(C,U)-C+MB7(E,V)M(*)C	47000	16	13	975	1400
060KB	X60(C,U)-C+MB7(E,V)M(*)C	57000	16	13	1025	1500

Outdoor Unit Number CSA4BF	Indoor Unit Number B6VMA	High Speed Capacity (BTU/h)	SEER	EER	Low Speed SCFM	High Speed SCFM
024KB	X24K-B	24000	16	13	670	930
036KB	X36K-B	36000	16	13	810	1140
048KC	X48K-C	47000	16	13	975	1400
060KB	X60K-C	57000	16	13	1025	1520

Air handlers and coils used in tables are designed and manufactured by NORDYNE.

See current AHRI Directory for certified combinations and ratings.
www.ahridirectory.org

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit Ampacity
200	150	100	50	
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

EXPANDED COOLING PERFORMANCE - 2-STAGE AC SYSTEMS

CSA4BF024KB C6B(A,H)-X26(C,U)-B + VSB - High Speed

CSA4BF024KB B6VMAX24K-B - High Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	26.5	20.9	1.39	25.6	20.8	1.53	24.5	20.9	1.69	23.4	20.5	1.86	22.14	21.60	2.08	20.85	20.33	2.34
	80	67	28.6	17.0	1.41	27.6	16.9	1.55	26.4	17.1	1.70	25.2	16.7	1.88	23.80	16.46	2.10	22.44	15.49	2.35
	80	72	31.5	13.1	1.43	30.3	13.0	1.57	29.0	13.3	1.73	27.5	13.0	1.92	26.11	12.86	2.12	24.58	13.22	2.37
	75	62	26.3	17.2	1.39	25.3	17.1	1.53	24.2	17.2	1.69	23.1	16.9	1.86	21.86	15.61	2.07	20.57	16.84	2.33
800	80	62	27.2	22.6	1.41	26.2	23.0	1.55	25.1	22.5	1.71	24.0	22.3	1.88	22.77	22.00	2.11	21.65	21.47	2.36
	80	67	29.3	18.1	1.43	28.2	18.7	1.57	27.0	18.2	1.72	25.7	18.0	1.90	24.27	18.00	2.12	22.92	18.17	2.37
	80	72	32.2	13.8	1.45	30.9	14.5	1.60	29.5	14.1	1.75	28.0	14.0	1.93	26.24	14.06	2.14	24.60	14.10	2.39
	75	62	26.9	18.4	1.41	25.9	18.9	1.55	24.8	18.4	1.70	23.7	18.4	1.88	22.38	18.29	2.09	21.00	18.20	2.35
900	80	62	28.2	25.0	1.44	27.1	25.1	1.58	25.9	24.1	1.73	24.7	23.5	1.91	23.51	22.71	2.13	22.32	22.22	2.38
	80	67	29.9	19.6	1.45	28.8	19.8	1.59	27.5	19.3	1.74	26.1	19.2	1.93	24.70	19.28	2.14	23.27	19.38	2.39
	80	72	32.6	14.9	1.47	31.2	15.2	1.61	29.5	14.8	1.77	28.0	14.7	1.95	26.48	14.65	2.16	24.93	14.81	2.40
	75	62	27.9	20.4	1.43	26.8	20.6	1.57	25.6	20.1	1.73	24.4	20.0	1.90	22.98	19.79	2.13	21.58	19.81	2.37

CSA4BF024KB C6B(A,H)-X26(C,U)-B + VSB - Low Speed

CSA4BF024KB B6VMAX24K-B - Low Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	20.7	18.6	0.92	20.1	18.3	1.04	19.4	18.1	1.17	18.5	17.4	1.32	17.55	17.25	1.50	16.56	16.28	1.69
	80	67	22.2	14.8	0.91	21.4	14.8	1.03	20.5	15.0	1.16	19.4	14.8	1.32	18.25	14.55	1.49	17.05	14.26	1.69
	80	72	24.3	11.1	0.89	23.3	11.1	1.01	22.1	11.3	1.14	20.9	11.0	1.31	19.62	10.83	1.48	18.32	11.00	1.69
	75	62	20.4	15.2	0.92	19.7	15.1	1.04	18.8	15.2	1.18	17.8	14.9	1.33	16.74	13.69	1.50	15.63	14.73	1.70
800	80	62	21.5	19.4	0.92	20.9	19.5	1.04	20.1	18.7	1.18	19.1	18.1	1.33	18.14	17.53	1.50	17.09	16.95	1.70
	80	67	22.7	16.1	0.91	21.9	16.6	1.03	20.9	16.2	1.17	19.7	16.1	1.32	18.55	16.03	1.50	17.32	15.98	1.70
	80	72	24.5	11.8	0.90	23.5	12.3	1.02	22.4	11.9	1.15	21.2	11.8	1.31	19.92	11.81	1.49	18.58	11.79	1.70
	75	62	20.8	16.4	0.93	20.1	16.8	1.04	19.2	16.4	1.18	18.2	16.2	1.34	17.05	16.12	1.51	16.00	15.86	1.70
900	80	62	22.2	20.2	0.92	21.5	20.1	1.04	20.7	19.3	1.18	19.7	18.7	1.33	18.62	17.99	1.51	17.54	17.47	1.70
	80	67	23.1	17.5	0.92	22.2	17.7	1.04	21.2	17.4	1.17	20.0	17.3	1.33	18.79	17.14	1.51	17.56	17.16	1.70
	80	72	24.8	12.7	0.90	23.9	12.9	1.02	22.7	12.6	1.16	21.4	12.5	1.32	20.11	12.41	1.50	18.75	12.46	1.70
	75	62	21.4	18.1	0.93	20.6	18.3	1.05	19.9	17.7	1.19	18.5	17.4	1.34	17.43	16.85	1.51	16.38	16.31	1.71

CSA4BF036KB C6B(A,H)-X36(C,U)-B + VSB - High Speed

CSA4BF036KB B6VMAX36K-B - High Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	39.0	31.3	2.11	37.5	31.1	2.30	35.9	31.3	2.50	34.2	30.7	2.77	32.41	31.86	3.07	30.67	30.15	3.40
	80	67	42.4	25.4	2.15	40.6	25.3	2.32	38.8	25.7	2.55	36.9	25.2	2.80	34.95	24.90	3.09	32.84	23.54	3.42
	80	72	46.3	19.4	2.20	44.3	19.3	2.37	42.4	19.7	2.58	40.4	19.4	2.83	38.24	19.11	3.11	35.91	19.59	3.44
	75	62	38.8	26.0	2.11	37.2	25.8	2.29	35.6	26.0	2.50	33.8	25.5	2.77	32.03	23.51	3.07	30.05	25.24	3.40
1200	80	62	40.1	33.9	2.16	38.5	34.5	2.33	36.8	33.8	2.55	35.2	33.2	2.81	33.60	32.47	3.11	31.84	31.57	3.45
	80	67	43.2	27.5	2.19	41.4	28.3	2.36	39.5	27.6	2.58	37.6	27.3	2.83	35.60	27.36	3.12	33.45	27.35	3.46
	80	72	47.2	20.6	2.24	45.1	21.5	2.42	43.2	20.9	2.63	41.1	20.8	2.86	38.85	20.97	3.15	36.43	21.11	3.48
	75	62	39.7	27.9	2.15	38.1	28.6	2.33	36.4	27.9	2.54	34.5	27.5	2.81	32.67	27.48	3.10	30.64	27.37	3.44
1350	80	62	41.0	36.8	2.19	39.5	36.8	2.37	38.0	35.4	2.59	36.4	34.5	2.85	34.66	33.49	3.15	32.81	32.67	3.48
	80	67	44.0	29.8	2.23	42.1	30.1	2.40	40.2	29.4	2.62	38.2	29.3	2.87	36.16	29.18	3.16	33.91	29.30	3.49
	80	72	47.9	22.3	2.29	45.8	22.7	2.45	43.7	22.1	2.66	41.6	22.2	2.90	39.25	22.15	3.18	36.74	22.44	3.51
	75	62	40.5	30.2	2.19	38.8	30.4	2.37	37.0	29.7	2.58	35.1	29.5	2.84	33.20	29.29	3.14	31.11	29.29	3.47

CSA4BF036KB C6B(A,H)-X36(C,U)-B + VSB - Low Speed

CSA4BF036KB B6VMAX36K-B - Low Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	30.1	27.1	1.33	28.9	26.3	1.46	27.7	25.8	1.64	26.4	24.8	1.85	25.04	24.61	2.09	23.50	23.11	2.37
	80	67	32.1	22.3	1.31	30.6	22.1	1.46	29.1	22.3	1.63	27.5	21.9	1.85	25.81	21.56	2.09	23.95	21.27	2.37
	80	72	35.1	16.5	1.29	33.5	16.4	1.44	31.8	16.7	1.62	30.0	16.4	1.83	27.98	16.08	2.09	25.89	16.27	2.38
	75	62	29.3	22.5	1.33	27.9	22.3	1.47	26.5	22.4	1.65	25.0	22.0	1.86	23.50	20.11	2.10	21.88	21.51	2.38
1200	80	62	31.3	28.2	1.34	30.0	28.0	1.48	28.7	26.8	1.65	27.4	25.9	1.86	25.92	25.05	2.11	24.27	24.06	2.39
	80	67	32.7	24.1	1.32	31.2	24.7	1.47	29.6	24.1	1.65	28.0	23.9	1.86	26.26	23.82	2.11	24.33	23.66	2.39
	80	72	35.5	17.7	1.30	33.8	18.3	1.45	32.1	17.8	1.63	30.3	17.6	1.85	28.40	17.65	2.11	26.26	17.66	2.40
	75	62	29.9	24.4	1.35	28.5	24.8	1.48	27.1	24.3	1.66	25.6	23.9	1.87	24.14	23.32	2.11	22.59	22.40	2.39
1350	80	62	32.3	29.4	1.34	31.0	28.9	1.49	29.6	27.6	1.66	28.2	26.8	1.88	26.65	25.75	2.12	24.84	24.74	2.42
	80	67	33.2	26.3	1.34	31.7	26.5	1.48	30.1	25.9	1.66	28.4	25.8	1.88	26.70	25.53	2.12	24.86	24.75	2.42
	80	72	35.9	19.1	1.31	34.2	19.4	1.46	32.5	18.9	1.65	30.7	18.9	1.87	28.67	18.79	2.13	26.55	18.85	2.41
	75	62	30.4	26.5	1.36	29.0	26.6	1.50	27.6	25.8	1.68	26.3	24.9	1.89	24.79	23.96	2.13	23.16	23.07	2.41

EXPANDED COOLING PERFORMANCE - 2-STAGE AC SYSTEMS

CSA4BF048KC C6B(A,H)-X48(C,U)-C + VSB - High Speed

CSA4BF048KC B6VMAX48K-C - High Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	50.3	40.7	2.66	48.3	40.4	2.94	46.2	40.6	3.24	43.9	39.8	3.58	41.59	40.89	3.99	39.47	38.80	4.45
	80	67	54.2	33.0	2.70	52.0	32.8	2.97	49.7	33.1	3.27	47.3	32.7	3.62	44.61	32.15	4.02	41.96	30.63	4.49
	80	72	59.2	25.1	2.73	56.8	25.0	3.00	54.2	25.5	3.31	51.5	25.0	3.66	48.56	24.59	4.06	45.63	25.23	4.54
	75	62	49.9	33.8	2.65	47.9	33.5	2.93	45.8	33.7	3.23	43.4	33.0	3.58	41.01	30.46	3.98	38.57	32.65	4.44
1600	80	62	51.6	44.0	2.72	49.6	44.8	2.99	47.4	43.7	3.29	45.3	42.8	3.64	43.10	41.64	4.05	40.86	40.52	4.52
	80	67	55.4	35.6	2.74	53.2	36.6	3.02	50.7	35.7	3.32	48.1	35.3	3.67	45.38	35.27	4.07	42.66	35.26	4.54
	80	72	60.3	26.6	2.78	57.8	27.8	3.05	55.1	27.0	3.36	52.2	26.8	3.71	49.22	26.96	4.12	46.16	27.16	4.59
	75	62	51.0	36.2	2.71	49.0	37.0	2.99	46.8	36.1	3.29	44.3	35.6	3.63	41.75	35.45	4.03	39.21	35.32	4.49
1800	80	62	52.7	47.5	2.77	50.9	47.4	3.04	48.8	45.5	3.35	46.6	44.3	3.70	44.34	42.84	4.10	41.99	41.81	4.58
	80	67	56.3	38.5	2.79	54.0	38.9	3.07	51.4	38.0	3.37	48.8	37.8	3.72	46.00	37.54	4.12	43.19	37.70	4.59
	80	72	61.1	28.7	2.82	58.5	29.3	3.10	55.7	28.5	3.41	52.6	28.5	3.76	49.45	28.45	4.16	46.33	28.78	4.63
	75	62	51.9	39.0	2.77	49.8	39.3	3.04	47.5	38.4	3.34	45.0	38.1	3.68	42.37	37.71	4.08	39.84	37.72	4.55

CSA4BF048KC C6B(A,H)-X48(C,U)-C + VSB - Low Speed

CSA4BF048KC B6VMAX48K-C - Low Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	38.5	34.7	1.62	37.2	33.9	1.86	35.7	33.3	2.13	33.9	31.8	2.45	31.94	31.40	2.79	29.87	29.37	3.17
	80	67	41.0	28.4	1.60	39.3	28.3	1.84	37.4	28.5	2.13	35.2	27.9	2.45	32.85	27.40	2.79	30.43	26.99	3.16
	80	72	44.4	21.0	1.58	42.6	21.0	1.83	40.4	21.2	2.13	38.1	20.8	2.44	35.64	20.34	2.77	33.00	20.59	3.15
	75	62	37.5	28.8	1.62	36.0	28.6	1.87	34.2	28.7	2.14	32.2	28.1	2.44	29.94	25.39	2.80	27.74	27.21	3.18
1600	80	62	40.0	36.0	1.63	38.6	36.0	1.87	37.0	34.5	2.15	35.0	33.1	2.47	33.00	31.89	2.81	30.83	30.57	3.18
	80	67	41.8	30.7	1.62	40.0	31.4	1.87	38.0	30.7	2.15	35.8	30.3	2.47	33.43	30.17	2.81	31.01	29.89	3.18
	80	72	45.1	22.4	1.60	43.3	23.3	1.85	41.0	22.6	2.15	38.7	22.3	2.46	36.15	22.28	2.79	33.45	22.19	3.17
	75	62	38.3	31.1	1.64	36.7	31.7	1.89	34.9	30.9	2.16	32.9	30.4	2.46	30.73	29.69	2.82	28.61	28.37	3.20
1800	80	62	41.2	37.5	1.64	39.7	37.0	1.89	38.0	35.4	2.17	36.0	34.2	2.49	33.89	32.74	2.83	31.63	31.49	3.20
	80	67	42.4	33.3	1.64	40.6	33.6	1.89	38.6	32.9	2.17	36.3	32.6	2.49	34.00	32.17	2.83	31.64	31.51	3.20
	80	72	45.7	24.1	1.62	43.8	24.6	1.88	41.5	23.9	2.17	39.1	23.8	2.48	36.56	23.57	2.81	33.83	23.60	3.19
	75	62	38.9	33.6	1.66	37.4	33.8	1.90	35.5	32.9	2.18	33.6	31.9	2.49	31.50	30.44	2.84	29.31	29.18	3.22

CSA4BF060KB with C6B(A,H)-X60(C,U)-C + VSB - High Speed

CSA4BF060KB with B6VMAX60K-C- High Speed

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1575	80	62	61.2	45.0	3.53	58.0	43.6	3.98	54.8	42.3	4.43	51.6	40.9	4.88	48.4	39.5	5.33
	80	67	63.4	40.9	3.57	60.2	39.5	4.02	57.0	38.1	4.48	53.8	36.7	4.93	50.6	35.3	5.38
	80	72	65.6	36.7	3.62	62.4	35.3	4.07	59.2	33.9	4.52	56.1	32.6	4.97	52.9	31.2	5.42
	75	62	58.2	40.6	3.58	55.0	39.2	4.03	51.8	37.9	4.48	48.6	36.5	4.93	45.4	35.1	5.38
1625	80	62	61.8	45.2	3.56	58.6	43.8	4.01	55.4	42.4	4.46	52.2	41.0	4.91	49.0	39.7	5.36
	80	67	64.0	41.0	3.60	60.8	39.6	4.05	57.6	38.2	4.50	54.4	36.9	4.95	51.2	35.5	5.40
	80	72	66.2	36.8	3.65	63.0	35.5	4.10	59.8	34.1	4.55	56.6	32.7	5.00	53.4	31.3	5.45
	75	62	58.8	40.8	3.61	55.6	39.4	4.06	52.4	38.0	4.51	49.2	36.6	4.96	46.0	35.3	5.41
1675	80	62	62.3	45.3	3.59	59.1	43.9	4.04	55.9	42.6	4.49	52.7	41.2	4.94	49.6	39.8	5.39
	80	67	64.5	41.1	3.63	61.3	39.8	4.08	58.1	38.4	4.53	55.0	37.0	4.98	51.8	35.6	5.43
	80	72	66.7	37.0	3.68	63.6	35.6	4.13	60.4	34.2	4.58	57.2	32.8	5.03	54.0	31.5	5.48
	75	62	59.3	40.9	3.64	56.1	39.5	4.09	52.9	38.1	4.54	49.8	36.8	4.99	46.6	35.4	5.44

CSA4BF060KB with C6B(A,H)-X60(C,U)-C + VSB - Low Speed

CSA4BF060KB with B6VMAX60K-C- Low Speed

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1070	80	62	41.0	34.0	2.40	39.1	33.4	2.68	37.1	32.8	3.05	34.9	32.3	3.45	32.4	31.1	3.90
	80	67	44.7	28.9	2.39	42.5	28.0	2.68	40.3	27.1	3.04	37.9	26.1	3.45	35.2	25.1	3.89
	80	72	48.9	23.1	2.38	46.7	22.4	2.67	44.3	21.5	3.04	41.6	20.6	3.45	38.5	19.6	3.90
	75	62	41.5	28.0	2.40	39.6	27.2	2.68	37.5	26.3	3.05	35.3	25.3	3.45	32.7	24.2	3.91
1170	80	62	41.8	35.8	2.41	39.9	35.2	2.68	37.8	34.6	3.04	35.6	34.6	3.45	33.1	33.1	3.90
	80	67	45.4	30.1	2.39	43.3	29.3	2.67	41.0	28.4	3.04	38.6	27.4	3.45	35.8	26.3	3.91
	80	72	49.8	24.0	2.39	47.4	23.2	2.67	44.8	22.4	3.05	42.1	21.5	3.45	38.9	20.5	3.90
	75	62	42.3	29.2	2.41	40.3	28.4	2.68	38.2	27.5	3.05	35.9	26.5	3.45	33.2	25.4	3.91
1270	80	62	42.3	38.3	2.43	40.6	37.3	2.67	38.5	36.9	3.04	36.3	36.1	3.45	34.0	34.0	3.90
	80	67	46.2	31.4	2.40	43.9	30.6	2.67	41.7	29.7	3.04	39.1	28.7	3.45	36.2	27.6	3.90
	80	72	50.5	24.9	2.40	47.9	24.1	2.67	45.3	23.2	3.04	42.4	22.3	3.45	39.3	21.3	3.90
	75	62	43.0	30.5	2.41	40.9	29.6	2.68	38.8	28.7	3.05	36.4	27.7	3.45	33.7	26.6	3.90

ACCESSORIES - CONDENSING UNIT

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Extreme Wind Condition Mounting Kit - 920900



For current Energy Star Information please refer to www.energystar.gov

MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ©Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2012. All rights reserved.
780D-0912 (Replaces 780D-0812)

Printed in U.S.A. (09/12)