

## TECHNICAL SPECIFICATIONS

# FSA4BF Series

### Extra High Efficiency Air Conditioner Up to 16 SEER2 Residential System 2 - 5 Ton Capacity


The FSA4BF Series air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a line of quality, 16 SEER2 split system cooling equipment.



## FEATURES and BENEFITS

- **Copeland Scroll Two Stage Compressor:** The two stage compressor operates at 2 different capacity points to provide superior comfort and efficiency. Copeland's proven and simple design equates to years of comfort and reliability for the homeowner with whisper quiet operation.
- **Designed Using Galvanized Steel:** With powder-coated paint with a gloss finish that eliminates sharp edges and reduces scratching. It passes 950 hours of salt spray per ASTM Std. B117.
- **Composite Base Pan:** Absorbs sound and is corrosion resistant. Composite pan provides superior grip strength to previous steel versions.
- **Compressor Sound Blanket:** Engineered to suppress compressor noise ensuring quiet, reliable operation.
- **Swept-Wing Fan Blade:** Aerodynamic design reduces air turbulence and maximizes air flow across condenser coil.
- **Removable Top Grille Assembly:** Allows easy service access without disconnecting fan motor leads.
- **Low Pressure Switch:** Loss of charge protection ensures long compressor life. Auto-reset feature prevents nuisance service visits.
- **High Pressure Switch:** Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter Drier:** Included with unit, field installed.
- **One Piece Top/Orifice:** Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access:** Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Aluminum Coils:** All aluminum coils in all models which provides high corrosion resistance.
- **Servicer-Friendly Jacket:** 2-screw side panel removal makes coil cleaning quick and easy.


## MODEL IDENTIFICATION CODES

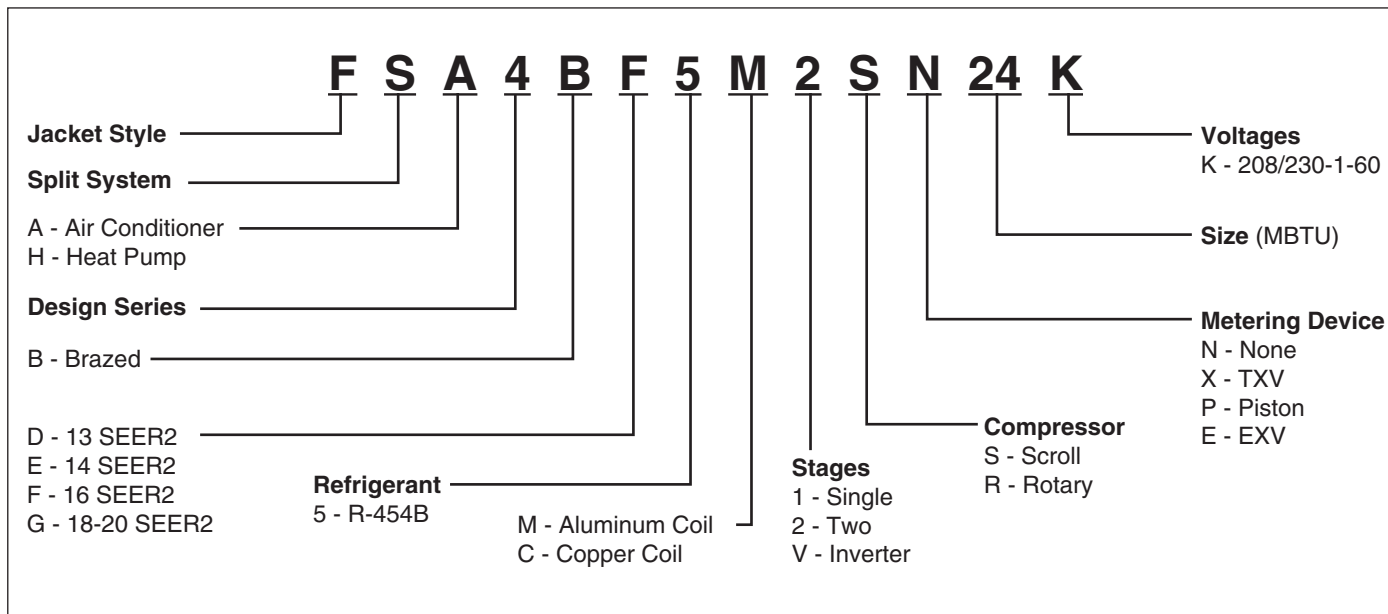

## DIMENSIONS

## AIR CONDITIONER OUTDOOR SECTION

| Model          | W     | D     | H    |
|----------------|-------|-------|------|
| FSA4BF5M2SN24K | 23.75 | 23.75 | 32.5 |
| FSA4BF5M2SN36K | 31.75 | 31.75 | 45.5 |
| FSA4BF5M2SN48K | 31.75 | 31.75 | 45.5 |
| FSA4BF5M2SN60K | 31.75 | 31.75 | 45.5 |

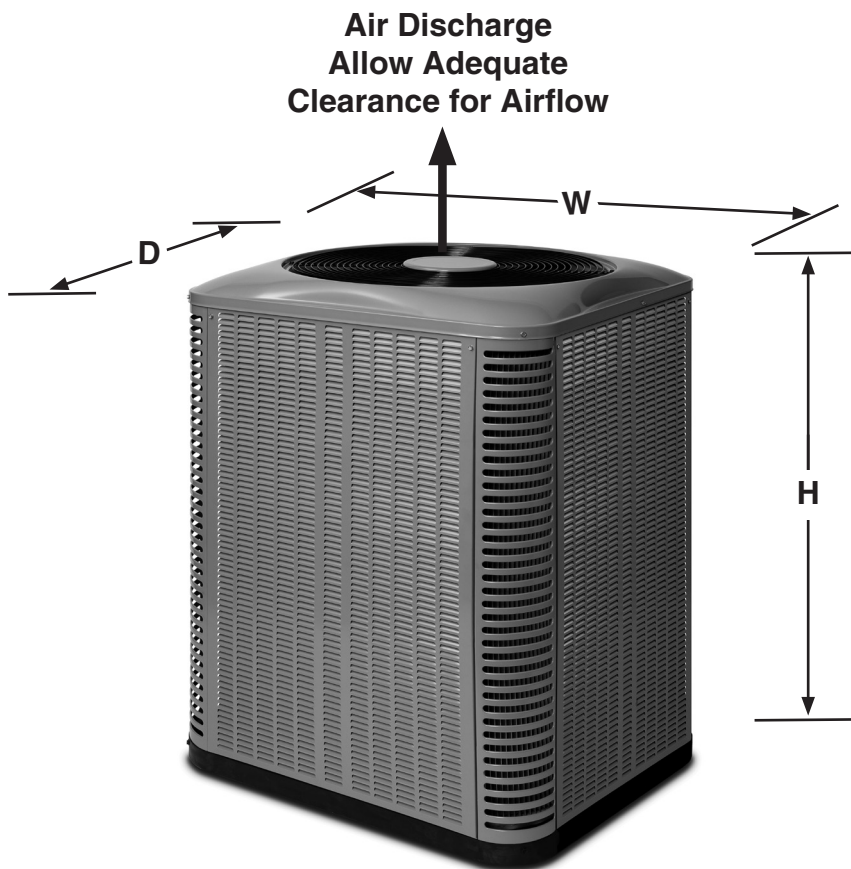

# PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

## 16 SEER2 — Extra High Efficiency — Single Phase

| Model Number FSA4BF5M                                                                     |                        | 2SN24K       | 2SN36K   | 2SN48K   | 2SN60K |
|-------------------------------------------------------------------------------------------|------------------------|--------------|----------|----------|--------|
| <b>Electrical Data</b>                                                                    | Volts-Cycles-Phase (1) | 208/230-60-1 |          |          |        |
|                                                                                           | Delay Fuse Max. (2)    | 20           | 30       | 40       | 50     |
|                                                                                           | Min. Circuit Ampacity  | 13.5         | 19.7     | 24.4     | 34     |
|                                                                                           | Comp. Locked Rotor Amp | 62.0         | 90.0     | 138      | 147.3  |
|                                                                                           | Fan Motor HP           | 1/10         | 1/4      | 1/3      | 1/3    |
| <b>Refrigerant suction line O.D.</b><br>NOTE: Liquid line is 3/8" O.D. for entire length. |                        | 0-24 ft.     | 5/8" (3) | 3/4"     | 7/8"   |
|                                                                                           |                        | 25-39 ft.    | 5/8" (3) | 3/4"     | 7/8"   |
|                                                                                           |                        | 40-75 ft.    | 3/4"     | 7/8" (4) | 7/8"   |
| <b>Approximate Weight (lbs.)</b>                                                          |                        | Ship         | 153      | 208      | 240    |
| <b>Sound Ratings dBA</b>                                                                  |                        |              | 72       | 74       | 74     |

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 3/4" to 5/8" reducer from line to unit.

(4) Requires 7/8" to 3/4" reducer from line to unit.

(5) Requires 7/8" to 1-1/8" reducer from line to unit.

## ACCESSORIES - Condensing Unit

### Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

**High Wind Tie-Down Kits** - <http://miamitech.com/products/metal/cutdnortek.html>

### Low Ambient Kit - 918837

### Cantilever Mounting Kit - 1018671

Four mounting corner post/panel split system design to cantilever mounts.

## SA4BF-TSL-AHRI-Ratings

| Outdoor Unit  | Indoor Unit            | A Test Capacity (BTU/hr) | SEER2 | EER2 | High Speed Rated SCFM | Low Speed Rated SCFM | DTC |
|---------------|------------------------|--------------------------|-------|------|-----------------------|----------------------|-----|
| SA4BF5M2SN24K | C75B(A,H)MX36(C,U)-B   | 23,400                   | 14.3  | 11.7 | 750                   | 565                  | Yes |
| SA4BF5M2SN36K | C75B(A,H)MX36(C,U)-B   | 35,000                   | 15.2  | 12.0 | 1,125                 | 845                  | Yes |
| SA4BF5M2SN36K | C75B(A,H)MX3642(C,U)-C | 35,000                   | 15.2  | 12.0 | 1,125                 | 845                  | No  |
| SA4BF5M2SN48K | C75B(A,H)MX4860(C,U)-C | 47,000                   | 15.2  | 12.0 | 1,400                 | 1,050                | Yes |
| SA4BF5M2SN48K | C75B(A,H)MX4860(C,U)-D | 47,000                   | 15.2  | 12.0 | 1,400                 | 1,050                | No  |
| SA4BF5M2SN60K | C75B(A,H)MX4860(C,U)-C | 56,000                   | 13.8  | 11.2 | 1,545                 | 1,160                | Yes |
| SA4BF5M2SN60K | C75B(A,H)MX4860(C,U)-D | 56,000                   | 13.8  | 11.2 | 1,545                 | 1,160                | No  |

|               |                                          |        |      |      |       |       |    |
|---------------|------------------------------------------|--------|------|------|-------|-------|----|
| SA4BF5M2SN24K | C75B(A,H)MX24(C,U)-A + G7T(*)-V(*)A(*)   | 23,000 | 16.0 | 12.0 | 745   | 500   | No |
| SA4BF5M2SN24K | C75B(A,H)MX24(C,U)-B + G7T(*)-V(*)B(*)   | 23,000 | 16.0 | 12.0 | 740   | 495   | No |
| SA4BF5M2SN36K | C75B(A,H)MX36(C,U)-B + G7T(*)-V(*)B(*)   | 35,000 | 16.0 | 12.0 | 1,120 | 750   | No |
| SA4BF5M2SN36K | C75B(A,H)MX3642(C,U)-C + G7T(*)-V(*)C(*) | 35,000 | 16.0 | 12.0 | 1,155 | 775   | No |
| SA4BF5M2SN48K | C75B(A,H)MX4860(C,U)-C + G7T(*)-V(*)C(*) | 47,000 | 16.0 | 12.0 | 1,505 | 1,035 | No |
| SA4BF5M2SN48K | C75B(A,H)MX4860(C,U)-D + G7T(*)-V(*)D(*) | 47,000 | 16.0 | 12.0 | 1,500 | 1,005 | No |
| SA4BF5M2SN60K | C74B(A,H)MX4860(C,U)-C + G7T(*)-V(*)C(*) | 56,000 | 16.0 | 12.0 | 1,500 | 1,025 | No |
| SA4BF5M2SN60K | C75B(A,H)MX4860(C,U)-D + G7T(*)-V(*)D(*) | 56,000 | 16.0 | 12.0 | 1,595 | 1,065 | No |

|               |                                            |        |      |      |       |       |    |
|---------------|--------------------------------------------|--------|------|------|-------|-------|----|
| SA4BF5M2SN24K | C75B(A,H)MX24(C,U)-A + G8SD-050U-T23A(*)   | 23,000 | 16.0 | 12.0 | 725   | 515   | No |
| SA4BF5M2SN24K | C75B(A,H)MX24(C,U)-B + G8SD-070U-T24B(*)   | 22,700 | 15.2 | 12.0 | 665   | 440   | No |
| SA4BF5M2SN36K | C75B(A,H)MX36(C,U)-B + G8SD-070U-T24B(*)   | 35,000 | 15.2 | 12.0 | 1,050 | 695   | No |
| SA4BF5M2SN36K | C75B(A,H)MX3642(C,U)-C + G8SD-100U-T35C(*) | 35,000 | 16.0 | 12.0 | 1,300 | 850   | No |
| SA4BF5M2SN48K | C75B(A,H)MX4860(C,U)-C + G8SD-100U-T35C(*) | 47,000 | 16.0 | 12.0 | 1,415 | 1,015 | No |

|               |                |        |      |      |       |       |    |
|---------------|----------------|--------|------|------|-------|-------|----|
| SA4BF5M2SN24K | B65VMMX24K-B   | 23,000 | 16.0 | 12.0 | 805   | 535   | No |
| SA4BF5M2SN24K | B65VMMX3648K-C | 35,000 | 16.0 | 12.0 | 1,115 | 730   | No |
| SA4BF5M2SN36K | B65VMMX3648K-C | 47,000 | 16.0 | 12.0 | 1,460 | 1,320 | No |
| SA4BF5M2SN48K | B65VMMX60K-C   | 55,500 | 16.0 | 12.0 | 1,700 | 1,145 | No |

# EXPANDED COOLING PERFORMANCE

SA4BF5M2SN24K + C75B(A,H)MX24(C,U)-B G7T-B HIGH SPEED

System ID: 2846

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 750   | 80     | 62     | 25.5 | 22.5 | 1.33 | 24.6 | 22.1 | 1.50 | 23.6 | 21.6 | 1.69 | 22.6 | 21.1 | 1.90 | 21.4  | 19.8 | 2.14 | 20.3  | 19.8 | 2.41 |
|       | 80     | 67     | 27.6 | 18.7 | 1.33 | 26.7 | 18.3 | 1.50 | 25.7 | 17.9 | 1.69 | 24.6 | 17.4 | 1.90 | 23.5  | 17.0 | 2.14 | 22.1  | 16.4 | 2.42 |
|       | 80     | 72     | 30.0 | 15.0 | 1.32 | 29.0 | 14.6 | 1.50 | 27.9 | 14.0 | 1.69 | 26.8 | 13.6 | 1.90 | 25.6  | 13.3 | 2.16 | 24.2  | 12.7 | 2.46 |
|       | 75     | 62     | 25.4 | 18.9 | 1.33 | 24.5 | 18.5 | 1.50 | 23.5 | 18.1 | 1.69 | 22.5 | 17.6 | 1.90 | 21.4  | 17.0 | 2.14 | 20.1  | 16.5 | 2.41 |
|       | 75     | 67     | 27.5 | 15.2 | 1.33 | 26.6 | 14.8 | 1.50 | 25.6 | 14.3 | 1.69 | 24.4 | 13.7 | 1.90 | 23.2  | 13.1 | 2.15 | 21.9  | 12.5 | 2.43 |
| 800   | 80     | 62     | 25.7 | 23.2 | 1.37 | 24.8 | 22.7 | 1.54 | 23.8 | 22.2 | 1.72 | 22.7 | 21.6 | 1.93 | 21.6  | 21.0 | 2.17 | 20.4  | 20.1 | 2.45 |
|       | 80     | 67     | 27.8 | 19.2 | 1.36 | 26.9 | 18.7 | 1.53 | 25.9 | 18.3 | 1.72 | 24.8 | 17.9 | 1.93 | 23.6  | 17.4 | 2.18 | 22.3  | 16.9 | 2.46 |
|       | 80     | 72     | 30.2 | 15.2 | 1.36 | 29.2 | 14.8 | 1.54 | 28.1 | 14.2 | 1.72 | 27.0 | 13.8 | 1.94 | 25.7  | 13.5 | 2.19 | 24.2  | 12.7 | 2.49 |
|       | 75     | 62     | 25.6 | 19.4 | 1.37 | 24.7 | 19.0 | 1.54 | 23.7 | 18.5 | 1.72 | 22.7 | 18.0 | 1.93 | 21.5  | 17.5 | 2.17 | 20.2  | 16.9 | 2.44 |
|       | 75     | 67     | 27.8 | 15.4 | 1.36 | 26.8 | 15.0 | 1.54 | 25.8 | 14.5 | 1.72 | 24.6 | 13.9 | 1.93 | 23.4  | 13.3 | 2.18 | 22.0  | 12.7 | 2.46 |
| 850   | 80     | 62     | 25.9 | 23.8 | 1.39 | 24.9 | 23.3 | 1.56 | 23.9 | 22.8 | 1.75 | 22.9 | 22.2 | 1.96 | 21.8  | 21.5 | 2.20 | 20.7  | 20.6 | 2.47 |
|       | 80     | 67     | 28.1 | 19.6 | 1.39 | 27.1 | 19.2 | 1.56 | 26.1 | 18.8 | 1.75 | 25.0 | 18.4 | 1.95 | 23.8  | 17.9 | 2.20 | 22.4  | 17.3 | 2.48 |
|       | 80     | 72     | 30.3 | 15.3 | 1.38 | 29.3 | 14.9 | 1.56 | 28.4 | 14.6 | 1.75 | 27.1 | 14.0 | 1.96 | 25.9  | 13.7 | 2.22 | 24.4  | 13.2 | 2.52 |
|       | 75     | 62     | 25.8 | 19.9 | 1.39 | 24.9 | 19.4 | 1.56 | 23.8 | 18.9 | 1.75 | 22.8 | 18.5 | 1.96 | 21.6  | 17.9 | 2.20 | 20.3  | 17.4 | 2.47 |
|       | 75     | 67     | 27.9 | 15.6 | 1.39 | 27.0 | 15.3 | 1.56 | 26.0 | 14.8 | 1.75 | 24.7 | 14.0 | 1.96 | 23.5  | 13.5 | 2.20 | 22.1  | 12.9 | 2.49 |

SA4BF5M2SN24K + C75B(A,H)MX24(C,U)-B G7T-B LOW SPEED

System ID: 2847

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 495   | 80     | 62     | 18.5 | 16.0 | 0.81 | 17.8 | 15.7 | 0.95 | 17.1 | 15.4 | 1.11 | 16.2 | 14.8 | 1.31 | 15.1  | 14.3 | 1.55 | 14.1  | 13.6 | 2.20 |
|       | 80     | 67     | 19.9 | 13.4 | 0.79 | 19.2 | 13.1 | 0.93 | 18.8 | 12.9 | 1.08 | 17.9 | 12.5 | 1.29 | 16.8  | 12.0 | 1.54 | 15.6  | 11.5 | 1.79 |
|       | 80     | 72     | 21.9 | 11.0 | 0.77 | 21.1 | 10.6 | 0.91 | 20.4 | 10.3 | 1.06 | 19.6 | 10.0 | 1.27 | 18.2  | 9.5  | 1.56 | 17.3  | 9.7  | 1.64 |
|       | 75     | 62     | 18.0 | 13.2 | 0.82 | 17.5 | 12.8 | 0.95 | 16.7 | 12.6 | 1.11 | 16.0 | 12.2 | 1.31 | 15.1  | 12.0 | 1.55 | 14.1  | 8.5  | 2.01 |
|       | 75     | 67     | 19.9 | 10.9 | 0.80 | 19.2 | 10.7 | 0.93 | 18.6 | 10.4 | 1.08 | 17.7 | 10.0 | 1.29 | 16.6  | 9.5  | 1.54 | 15.2  | 8.9  | 1.64 |
| 535   | 80     | 62     | 18.7 | 16.7 | 0.81 | 18.1 | 16.3 | 0.95 | 17.3 | 15.9 | 1.11 | 16.5 | 15.5 | 1.31 | 15.2  | 14.6 | 1.55 | 14.3  | 14.1 | 1.84 |
|       | 80     | 67     | 20.2 | 13.9 | 0.80 | 19.7 | 13.6 | 0.93 | 19.0 | 13.3 | 1.08 | 18.1 | 12.9 | 1.29 | 17.0  | 12.5 | 1.54 | 15.8  | 12.0 | 1.81 |
|       | 80     | 72     | 22.2 | 11.2 | 0.78 | 21.4 | 10.9 | 0.91 | 20.7 | 10.6 | 1.07 | 19.8 | 10.3 | 1.27 | 18.6  | 9.9  | 1.56 | 17.6  | 10.1 | 2.44 |
|       | 75     | 62     | 18.3 | 13.6 | 0.82 | 17.6 | 13.3 | 0.95 | 17.3 | 13.2 | 1.12 | 16.4 | 13.0 | 1.32 | 15.4  | 12.5 | 1.56 | 13.7  | 11.6 | 2.11 |
|       | 75     | 67     | 20.2 | 11.3 | 0.80 | 19.5 | 11.0 | 0.93 | 18.8 | 10.7 | 1.09 | 17.9 | 10.3 | 1.29 | 16.8  | 9.8  | 1.54 | 15.8  | 8.7  | 1.82 |
| 570   | 80     | 62     | 18.9 | 17.2 | 0.82 | 18.3 | 16.9 | 0.95 | 17.5 | 16.4 | 1.11 | 16.7 | 16.1 | 1.32 | 15.5  | 15.4 | 1.58 | 14.6  | 14.4 | 1.84 |
|       | 80     | 67     | 20.6 | 14.3 | 0.80 | 19.9 | 14.0 | 0.93 | 19.2 | 13.7 | 1.09 | 18.3 | 13.2 | 1.29 | 17.2  | 12.9 | 1.55 | 15.9  | 12.1 | 1.78 |
|       | 80     | 72     | 22.5 | 11.5 | 0.78 | 21.6 | 11.1 | 0.91 | 20.9 | 10.9 | 1.07 | 20.1 | 10.6 | 1.28 | 18.8  | 10.1 | 1.56 | 18.2  | 9.9  | 1.82 |
|       | 75     | 62     | 18.5 | 14.1 | 0.82 | 18.2 | 13.7 | 0.95 | 17.5 | 13.3 | 1.12 | 16.5 | 13.4 | 1.32 | 15.5  | 12.9 | 1.56 | 14.3  | 12.6 | 2.11 |
|       | 75     | 67     | 20.4 | 11.5 | 0.80 | 19.7 | 11.2 | 0.93 | 19.0 | 10.9 | 1.09 | 18.2 | 10.5 | 1.29 | 17.0  | 10.0 | 1.53 | 15.8  | 9.4  | 1.78 |

SA4BF5M2SN36K + C75B(A,H)MX36(C,U)-B G7T-B HIGH SPEED

System ID: 2971

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 1000  | 80     | 62     | 38.6 | 31.7 | 2.20 | 37.5 | 31.7 | 2.41 | 36.0 | 31.1 | 2.64 | 34.5 | 30.4 | 2.91 | 32.8  | 29.6 | 3.24 | 31.0  | 28.6 | 3.63 |
|       | 80     | 67     | 41.9 | 26.9 | 2.21 | 40.5 | 26.2 | 2.41 | 39.1 | 25.7 | 2.63 | 37.5 | 25.0 | 2.88 | 35.8  | 24.2 | 3.19 | 33.9  | 23.4 | 3.55 |
|       | 80     | 72     | 45.6 | 22.0 | 2.22 | 43.8 | 21.3 | 2.41 | 42.2 | 20.6 | 2.63 | 40.6 | 20.0 | 2.88 | 38.8  | 19.3 | 3.17 | 36.9  | 18.5 | 3.51 |
|       | 75     | 62     | 38.6 | 27.5 | 2.21 | 37.3 | 26.9 | 2.41 | 35.9 | 26.1 | 2.64 | 34.3 | 25.3 | 2.91 | 32.6  | 24.3 | 3.23 | 30.8  | 23.4 | 3.62 |
|       | 75     | 67     | 41.8 | 22.3 | 2.21 | 40.4 | 21.7 | 2.41 | 38.9 | 21.0 | 2.63 | 37.1 | 20.2 | 2.88 | 35.5  | 19.5 | 3.19 | 33.6  | 18.7 | 3.56 |
| 1120  | 80     | 62     | 39.3 | 33.2 | 2.27 | 38.1 | 33.4 | 2.48 | 36.7 | 32.9 | 2.71 | 35.0 | 32.1 | 2.97 | 33.3  | 31.2 | 3.30 | 31.4  | 30.1 | 3.68 |
|       | 80     | 67     | 42.6 | 28.0 | 2.28 | 41.2 | 27.4 | 2.47 | 39.7 | 26.8 | 2.69 | 38.1 | 25.9 | 2.95 | 36.3  | 25.2 | 3.25 | 34.3  | 24.3 | 3.62 |
|       | 80     | 72     | 46.4 | 22.7 | 2.29 | 44.8 | 22.1 | 2.48 | 43.2 | 21.4 | 2.70 | 41.2 | 20.6 | 2.95 | 39.4  | 19.9 | 3.24 | 37.4  | 19.2 | 3.58 |
|       | 75     | 62     | 39.4 | 28.6 | 2.28 | 38.0 | 28.1 | 2.48 | 36.6 | 27.4 | 2.71 | 34.9 | 26.6 | 2.98 | 33.1  | 25.4 | 3.30 | 31.2  | 24.5 | 3.70 |
|       | 75     | 67     | 42.5 | 22.9 | 2.28 | 41.1 | 22.3 | 2.48 | 39.5 | 21.6 | 2.69 | 37.8 | 20.9 | 2.95 | 35.9  | 20.0 | 3.25 | 34.2  | 19.2 | 3.62 |
| 1350  | 80     | 62     | 40.2 | 35.8 | 2.44 | 38.8 | 36.2 | 2.64 | 37.4 | 35.6 | 2.87 | 35.7 | 34.5 | 3.14 | 34.0  | 33.5 | 3.46 | 32.2  | 32.0 | 3.84 |
|       | 80     | 67     | 43.6 | 29.8 | 2.45 | 42.0 | 29.1 | 2.64 | 40.5 | 28.6 | 2.86 | 38.7 | 27.8 | 3.12 | 36.8  | 27.0 | 3.42 | 34.8  | 26.1 | 3.78 |
|       | 80     | 72     | 47.0 | 23.6 | 2.46 | 45.7 | 23.0 | 2.65 | 43.9 | 22.4 | 2.86 | 41.9 | 21.6 | 3.11 | 39.9  | 20.7 | 3.40 | 37.8  | 19.8 | 3.74 |
|       | 75     | 62     | 40.3 | 30.7 | 2.44 | 38.7 | 30.1 | 2.64 | 37.2 | 29.4 | 2.87 | 35.5 | 28.5 | 3.14 | 33.6  | 27.1 | 3.46 | 31.6  | 26.2 | 3.84 |
|       | 75     | 67     | 43.2 | 23.8 | 2.45 | 41.9 | 23.3 | 2.64 | 40.2 | 22.6 | 2.86 | 38.5 | 21.8 | 3.11 | 36.5  | 21.0 | 3.42 | 34.5  | 20.1 | 3.78 |

SA4BF5M2SN36K + C75B(A,H)MX36(C,U)-B G7T-B LOW SPEED

System ID: 2972

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 670   | 80     | 62     | 27.4 | 22.9 | 1.28 | 26.5 | 22.5 | 1.51 | 25.4 | 21.9 | 1.80 | 24.1 | 21.3 | 2.14 | 22.7  | 20.7 | 2.54 | 20.5  | 19.8 | 3.27 |
|       | 80     | 67     | 29.7 | 19.3 | 1.24 | 28.6 | 18.7 | 1.45 | 27.7 | 18.4 | 1.68 | 26.5 | 17.7 | 1.96 | 25.1  | 17.1 | 2.31 | 23.6  | 16.4 | 2.71 |
|       | 80     | 72     | 32.5 | 16.0 | 1.22 | 31.2 | 15.4 | 1.43 | 29.9 | 14.9 | 1.66 | 28.7 | 14.4 | 1.91 | 27.4  | 13.9 | 2.18 | 26.0  | 13.3 | 2.50 |
|       | 75     | 62     | 27.3 | 19.5 | 1.29 | 26.4 | 19.1 | 1.51 | 25.2 | 18.5 | 1.80 | 24.0 | 17.7 | 2.16 | 22.6  | 17.2 | 2.55 | 21.0  | 16.4 | 3.00 |
|       | 75     | 67     | 29.5 | 16.0 | 1.25 | 28.5 | 15.5 | 1.45 | 27.5 | 15.1 | 1.68 | 26.4 | 14.6 | 1.96 | 25.0  | 14.0 | 2.31 | 23.5  | 13.3 | 2.70 |
| 745   | 80     | 62     | 27.9 | 24.0 | 1.33 | 26.9 | 23.5 | 1.55 | 25.8 | 23.0 | 1.84 | 24.5 | 22.4 | 2.18 | 23.0  | 21.0 | 2.60 | 20.8  | 19.1 | 2.80 |
|       | 80     | 67     | 30.1 | 19.9 | 1.29 | 29.1 | 19.4 | 1.50 | 28.1 | 18.7 | 1.73 | 26.9 | 18.4 | 2.00 | 25.5  | 17.8 | 2.35 | 23.9  | 17.2 | 2.75 |
|       | 80     | 72     | 33.0 | 16.4 | 1.26 | 31.7 | 15.8 | 1.48 | 30.4 | 15.3 | 1.70 | 29.0 | 14.7 | 1.95 | 27.6  | 14.2 | 2.23 | 26.3  | 13.7 | 2.55 |
|       | 75     | 62     | 27.8 | 20.1 | 1.33 | 26.9 | 19.8 | 1.55 | 25.7 | 19.3 | 1.84 | 24.3 | 18.4 | 2.20 | 22.9  | 17.9 | 2.60 | 21.2  | 17.1 | 3.04 |
|       | 75     | 67     | 30.0 | 16.4 | 1.29 | 29.0 | 16.0 | 1.50 | 28.0 | 15.5 | 1.73 | 26.8 | 15.0 | 2.00 | 25.2  | 14.3 | 2.35 | 23.7  | 13.6 | 2.74 |
| 905   | 80     | 62     | 28.6 | 26.0 | 1.45 | 27.5 | 25.6 | 1.67 | 26.3 | 25.0 | 1.96 | 25.0 | 24.3 | 2.30 | 23.5  | 23.3 | 2.70 | 22.1  | 22.0 | 3.14 |
|       | 80     | 67     | 30.8 | 21.2 | 1.41 | 29.7 | 20.7 | 1.62 | 28.6 | 20.2 | 1.85 | 27.4 | 19.9 | 2.13 | 25.9  | 19.1 | 2.47 | 24.2  | 18.5 | 2.86 |
|       | 80     | 72     | 33.4 | 16.9 | 1.39 | 32.3 | 16.4 | 1.60 | 30.7 | 15.9 | 1.83 | 29.6 | 15.4 | 2.08 | 28.1  | 14.9 | 2.36 | 26.5  | 14.2 | 2.68 |
|       | 75     | 62     | 28.4 | 21.8 | 1.45 | 27.4 | 21.3 | 1.67 | 26.2 | 20.7 | 1.96 | 24.8 | 20.1 | 2.30 | 23.2  | 18.9 | 2.72 | 21.5  | 18.2 | 3.16 |
|       | 75     | 67     | 30.8 | 17.1 | 1.41 | 29.6 | 16.6 | 1.62 | 28.5 | 16.2 | 1.86 | 27.3 | 15.7 | 2.13 | 25.7  | 15.0 | 2.47 | 24.0  | 14.3 | 2.87 |



# EXPANDED COOLING PERFORMANCE (CONT.)

SA4BF5M2SN48K + C75B(A,H)MX4860(C,U)-C G7T-C HIGH SPEED

System ID: 2973

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 1415  | 80     | 62     | 52.0 | 44.3 | 2.93 | 50.0 | 43.4 | 3.21 | 48.0 | 42.5 | 3.53 | 46.0 | 41.2 | 3.89 | 43.6  | 40.4 | 4.31 | 41.1  | 38.9 | 4.78 |
|       | 80     | 67     | 56.5 | 36.9 | 2.95 | 54.2 | 35.3 | 3.23 | 52.4 | 35.4 | 3.54 | 50.0 | 34.3 | 3.91 | 47.5  | 33.2 | 4.32 | 44.8  | 31.8 | 4.81 |
|       | 80     | 72     | 60.9 | 29.7 | 2.98 | 59.1 | 29.0 | 3.26 | 56.8 | 28.1 | 3.57 | 54.3 | 27.1 | 3.93 | 51.6  | 26.1 | 4.35 | 48.8  | 25.0 | 4.83 |
|       | 75     | 62     | 51.8 | 37.5 | 2.93 | 49.9 | 36.5 | 3.21 | 48.0 | 35.7 | 3.53 | 45.8 | 34.7 | 3.88 | 43.5  | 33.6 | 4.30 | 41.0  | 31.7 | 4.79 |
|       | 75     | 67     | 56.2 | 30.2 | 2.95 | 54.3 | 29.4 | 3.23 | 52.1 | 28.4 | 3.54 | 49.9 | 27.4 | 3.91 | 47.3  | 26.3 | 4.32 | 44.7  | 25.2 | 4.80 |
| 1480  | 80     | 62     | 52.4 | 45.3 | 2.96 | 50.4 | 44.4 | 3.24 | 48.3 | 43.5 | 3.55 | 46.2 | 42.5 | 3.91 | 43.8  | 40.5 | 4.34 | 41.4  | 39.7 | 4.81 |
|       | 80     | 67     | 56.8 | 37.4 | 2.98 | 54.7 | 35.9 | 3.26 | 52.7 | 36.0 | 3.57 | 50.3 | 34.9 | 3.94 | 47.8  | 33.8 | 4.35 | 45.1  | 32.6 | 4.83 |
|       | 80     | 72     | 61.4 | 30.1 | 3.01 | 59.5 | 29.4 | 3.29 | 57.2 | 28.5 | 3.60 | 54.6 | 27.5 | 3.96 | 51.9  | 26.4 | 4.38 | 49.0  | 25.3 | 4.86 |
|       | 75     | 62     | 52.1 | 38.1 | 2.96 | 50.2 | 37.2 | 3.24 | 48.2 | 36.4 | 3.55 | 46.1 | 35.4 | 3.91 | 43.8  | 34.2 | 4.33 | 41.2  | 32.3 | 4.82 |
|       | 75     | 67     | 56.6 | 30.6 | 2.98 | 54.7 | 29.9 | 3.26 | 52.5 | 28.8 | 3.57 | 50.2 | 27.8 | 3.94 | 47.6  | 26.7 | 4.35 | 45.0  | 25.6 | 4.83 |
| 1505  | 80     | 62     | 52.3 | 45.4 | 3.04 | 50.3 | 44.6 | 3.32 | 48.3 | 43.7 | 3.64 | 46.2 | 42.2 | 4.01 | 43.7  | 40.6 | 4.42 | 41.2  | 39.8 | 4.90 |
|       | 80     | 67     | 56.8 | 37.6 | 3.07 | 54.4 | 35.7 | 3.34 | 52.6 | 36.0 | 3.66 | 50.1 | 34.9 | 4.02 | 47.7  | 33.9 | 4.44 | 45.0  | 32.1 | 4.92 |
|       | 80     | 72     | 61.3 | 30.0 | 3.10 | 59.4 | 29.3 | 3.37 | 57.1 | 28.3 | 3.69 | 54.5 | 27.4 | 4.05 | 51.8  | 26.3 | 4.47 | 48.9  | 25.2 | 4.95 |
|       | 75     | 62     | 52.0 | 38.1 | 3.04 | 50.1 | 37.3 | 3.32 | 48.1 | 36.4 | 3.64 | 45.9 | 35.4 | 4.00 | 43.6  | 34.2 | 4.42 | 41.1  | 32.7 | 4.90 |
|       | 75     | 67     | 56.5 | 30.5 | 3.07 | 54.6 | 29.8 | 3.34 | 52.4 | 28.7 | 3.66 | 50.0 | 27.6 | 4.02 | 47.5  | 26.6 | 4.44 | 44.8  | 25.5 | 4.92 |

SA4BF5M2SN48K + C75B(A,H)MX4860(C,U)-C G7T-C HIGH SPEED

System ID: 2974

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 950   | 80     | 62     | 35.5 | 30.8 | 1.65 | 34.6 | 30.4 | 1.93 | 33.1 | 29.7 | 2.22 | 31.2 | 28.8 | 2.56 | 28.9  | 27.6 | 2.96 | 26.6  | 26.3 | 3.40 |
|       | 80     | 67     | 39.0 | 26.0 | 1.63 | 37.9 | 25.5 | 1.91 | 36.3 | 24.9 | 2.19 | 34.4 | 22.9 | 2.51 | 32.2  | 23.0 | 2.85 | 29.6  | 22.0 | 3.29 |
|       | 80     | 72     | 43.3 | 21.4 | 1.65 | 41.9 | 20.7 | 1.93 | 40.0 | 20.1 | 2.21 | 37.9 | 19.2 | 2.51 | 35.5  | 18.4 | 2.85 | 32.8  | 17.0 | 3.26 |
|       | 75     | 62     | 35.4 | 26.0 | 1.65 | 34.5 | 25.6 | 1.93 | 33.0 | 24.9 | 2.23 | 31.0 | 24.0 | 2.56 | 28.8  | 23.0 | 2.95 | 26.3  | 21.8 | 3.40 |
|       | 75     | 67     | 39.0 | 21.3 | 1.63 | 37.9 | 20.8 | 1.91 | 36.2 | 20.2 | 2.19 | 34.4 | 19.4 | 2.50 | 32.2  | 18.4 | 2.86 | 29.6  | 17.3 | 3.29 |
| 990   | 80     | 62     | 35.9 | 31.5 | 1.65 | 34.9 | 31.1 | 1.93 | 33.3 | 30.4 | 2.23 | 31.4 | 29.4 | 2.56 | 29.2  | 28.2 | 2.96 | 26.9  | 26.5 | 3.40 |
|       | 80     | 67     | 39.4 | 26.5 | 1.64 | 38.2 | 26.0 | 1.91 | 36.6 | 25.4 | 2.20 | 34.6 | 24.5 | 2.50 | 32.4  | 23.5 | 2.86 | 30.1  | 22.6 | 3.28 |
|       | 80     | 72     | 43.7 | 21.6 | 1.66 | 42.3 | 21.2 | 1.93 | 40.3 | 20.4 | 2.21 | 38.2 | 19.6 | 2.51 | 35.8  | 18.7 | 2.85 | 33.2  | 17.7 | 3.26 |
|       | 75     | 62     | 35.7 | 26.5 | 1.65 | 34.7 | 26.1 | 1.93 | 33.3 | 25.4 | 2.23 | 31.3 | 24.6 | 2.56 | 29.0  | 23.4 | 2.95 | 26.5  | 22.3 | 3.40 |
|       | 75     | 67     | 39.2 | 21.6 | 1.64 | 38.1 | 21.1 | 1.91 | 36.5 | 20.5 | 2.20 | 34.6 | 19.6 | 2.51 | 32.4  | 18.7 | 2.86 | 29.8  | 17.6 | 3.30 |
| 1010  | 80     | 62     | 36.0 | 31.9 | 1.66 | 35.0 | 31.4 | 1.93 | 33.5 | 30.7 | 2.23 | 31.5 | 29.7 | 2.57 | 29.3  | 28.5 | 2.96 | 27.1  | 26.7 | 3.40 |
|       | 80     | 67     | 39.6 | 26.8 | 1.64 | 38.3 | 26.3 | 1.91 | 36.7 | 25.6 | 2.20 | 34.7 | 24.7 | 2.51 | 32.5  | 23.8 | 2.86 | 30.0  | 22.8 | 3.29 |
|       | 80     | 72     | 43.9 | 21.8 | 1.66 | 42.4 | 21.3 | 1.93 | 40.4 | 20.3 | 2.22 | 38.4 | 19.7 | 2.52 | 36.0  | 18.9 | 2.85 | 33.2  | 17.4 | 3.26 |
|       | 75     | 62     | 35.9 | 26.8 | 1.66 | 34.9 | 26.4 | 1.93 | 33.4 | 25.7 | 2.23 | 31.4 | 24.8 | 2.57 | 29.1  | 23.7 | 2.95 | 26.6  | 22.5 | 3.40 |
|       | 75     | 67     | 39.3 | 21.7 | 1.64 | 38.3 | 21.3 | 1.92 | 36.6 | 20.6 | 2.20 | 34.7 | 19.7 | 2.51 | 32.4  | 18.8 | 2.86 | 29.9  | 17.8 | 3.30 |

SA4BF5M2SN60K + C75B(A,H)MX4860(C,U)-C G7T-C HIGH SPEED

System ID: 2874

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 1480  | 80     | 62     | 60.3 | 48.4 | 3.44 | 58.4 | 47.8 | 3.81 | 56.1 | 46.5 | 4.20 | 53.9 | 45.5 | 4.65 | 51.5  | 43.7 | 5.20 | 48.7  | 42.8 | 5.97 |
|       | 80     | 67     | 65.4 | 41.2 | 3.47 | 63.6 | 40.5 | 3.85 | 61.3 | 39.4 | 4.26 | 58.9 | 38.5 | 4.73 | 56.3  | 37.2 | 5.30 | 53.2  | 35.8 | 6.12 |
|       | 80     | 72     | 69.6 | 33.3 | 3.49 | 68.3 | 32.8 | 3.87 | 66.1 | 32.0 | 4.28 | 63.7 | 31.0 | 4.76 | 61.1  | 29.9 | 5.35 | 57.6  | 28.5 | 6.21 |
|       | 75     | 62     | 60.2 | 41.7 | 3.44 | 58.1 | 40.6 | 3.81 | 56.0 | 39.5 | 4.20 | 53.7 | 38.4 | 4.65 | 51.3  | 37.3 | 5.20 | 48.5  | 35.9 | 5.96 |
|       | 75     | 67     | 65.2 | 34.4 | 3.47 | 63.2 | 33.5 | 3.85 | 61.0 | 32.5 | 4.26 | 58.6 | 31.4 | 4.73 | 56.0  | 30.3 | 5.29 | 53.0  | 28.9 | 6.11 |
| 1545  | 80     | 62     | 60.7 | 49.2 | 3.49 | 58.8 | 48.6 | 3.86 | 56.6 | 47.5 | 4.25 | 54.2 | 46.4 | 4.70 | 51.8  | 44.5 | 5.25 | 48.9  | 43.5 | 6.02 |
|       | 80     | 67     | 65.8 | 41.8 | 3.52 | 64.0 | 41.0 | 3.90 | 61.7 | 40.0 | 4.31 | 59.2 | 38.9 | 4.78 | 56.6  | 37.7 | 5.35 | 53.5  | 36.3 | 6.17 |
|       | 80     | 72     | 70.2 | 33.8 | 3.53 | 68.7 | 33.2 | 3.92 | 66.5 | 32.3 | 4.33 | 64.1 | 31.3 | 4.81 | 61.4  | 30.2 | 5.41 | 57.9  | 28.8 | 6.26 |
|       | 75     | 62     | 60.6 | 42.4 | 3.49 | 58.6 | 41.2 | 3.86 | 56.3 | 40.1 | 4.25 | 54.0 | 38.9 | 4.70 | 51.5  | 37.7 | 5.24 | 48.8  | 36.6 | 6.00 |
|       | 75     | 67     | 65.6 | 34.8 | 3.52 | 63.6 | 33.8 | 3.89 | 61.4 | 32.8 | 4.30 | 59.0 | 31.8 | 4.77 | 56.3  | 30.6 | 5.34 | 53.2  | 29.2 | 6.16 |
| 1595  | 80     | 62     | 61.1 | 49.9 | 3.54 | 59.1 | 49.5 | 3.91 | 56.8 | 48.4 | 4.30 | 54.5 | 47.4 | 4.75 | 52.0  | 46.0 | 5.29 | 49.2  | 44.3 | 6.06 |
|       | 80     | 67     | 66.2 | 42.4 | 3.57 | 64.3 | 41.6 | 3.95 | 62.0 | 40.6 | 4.36 | 59.5 | 39.5 | 4.83 | 56.8  | 38.3 | 5.40 | 53.7  | 36.8 | 6.22 |
|       | 80     | 72     | 70.7 | 34.1 | 3.59 | 69.1 | 33.5 | 3.97 | 66.9 | 32.6 | 4.38 | 64.4 | 31.6 | 4.86 | 61.8  | 30.5 | 5.45 | 58.2  | 29.1 | 6.30 |
|       | 75     | 62     | 61.0 | 43.0 | 3.54 | 58.9 | 41.8 | 3.91 | 56.7 | 40.6 | 4.30 | 54.4 | 39.9 | 4.75 | 51.8  | 38.2 | 5.29 | 49.0  | 37.1 | 6.05 |
|       | 75     | 67     | 66.0 | 35.0 | 3.57 | 64.0 | 34.2 | 3.95 | 61.7 | 33.2 | 4.36 | 59.3 | 32.1 | 4.83 | 56.6  | 30.9 | 5.39 | 53.0  | 29.3 | 6.19 |

SA4BF5M2SN48K + C75B(A,H)MX4860(C,U)-C G7T-C HIGH SPEED

System ID: 2875

| O.D.T |        |        | 65°F |      |      | 75°F |      |      | 85°F |      |      | 95°F |      |      | 105°F |      |      | 115°F |      |      |
|-------|--------|--------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|-------|------|------|
| CFM   | E.D.B. | E.W.B. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C. | S.C. | K.W. | T.C.  | S.C. | K.W. | T.C.  | S.C. | K.W. |
| 990   | 80     | 62     | 43.9 | 35.1 | 2.07 | 42.3 | 34.3 | 2.37 | 40.4 | 33.4 | 2.69 | 38.2 | 32.3 | 3.06 | 35.8  | 31.1 | 3.51 | 32.3  | 28.0 | 4.17 |
|       | 80     | 67     | 48.0 | 30.2 | 2.05 | 46.3 | 29.4 | 2.35 | 44.4 | 28.4 | 2.69 | 42.1 | 27.4 | 3.07 | 39.4  | 26.1 | 3.55 | 36.1  | 24.6 | 4.23 |
|       | 80     | 72     | 51.9 | 25.1 | 2.02 | 50.4 | 24.4 | 2.32 | 48.5 | 23.6 | 2.66 | 46.1 | 22.6 | 3.04 | 43.5  | 21.6 | 3.52 | 40.1  | 20.2 | 4.23 |
|       | 75     | 62     | 43.7 | 30.0 | 2.07 | 42.2 | 29.5 | 2.37 | 40.2 | 28.1 | 2.69 | 38.1 | 27.5 | 3.06 | 35.7  | 26.2 | 3.51 | 32.5  | 24.8 | 4.16 |
|       | 75     | 67     | 47.8 | 25.4 | 2.05 | 46.1 | 24.6 | 2.35 | 44.3 | 23.8 | 2.68 | 42.0 | 22.7 | 3.07 | 39.4  | 21.6 | 3.54 | 36.0  | 20.1 | 4.22 |
| 1035  | 80     | 62     | 44.4 | 35.8 | 2.08 | 42.7 | 35.1 | 2.38 | 40.8 | 34.2 | 2.70 | 38.6 | 33.0 | 3.07 | 36.1  | 31.8 | 3.52 | 32.9  | 29.6 | 4.17 |
|       | 80     | 67     | 48.4 | 30.6 | 2.06 | 46.9 | 30.0 | 2.36 | 44.8 | 28.9 | 2.69 | 42.4 | 27.9 | 3.08 | 39.9  | 26.6 | 3.55 | 36.5  | 25.1 | 4.23 |
|       | 80     | 72     | 52.5 | 25.4 | 2.03 | 50.9 | 24.7 | 2.33 | 48.9 | 23.9 | 2.67 | 46.6 | 23.0 | 3.05 | 44.0  | 21.9 | 3.53 | 40.4  | 20.5 | 4.24 |
|       | 75     | 62     | 44.2 | 30.8 | 2.08 | 42.4 | 29.5 | 2.38 | 40.6 | 29.1 | 2.70 | 38.5 | 28.0 | 3.07 | 36.0  | 26.7 | 3.52 | 32.7  | 24.5 | 4.17 |
|       | 75     | 67     | 48.4 | 25.8 | 2.06 | 46.7 | 25.1 | 2.36 | 44.6 | 24.0 | 2.69 | 42.3 | 23.0 | 3.08 | 39.7  | 21.9 | 3.55 | 36.4  | 20.4 | 4.22 |
| 1080  | 80     | 62     | 44.7 | 36.6 | 2.09 | 43.2 | 35.9 | 2.38 | 41.2 | 34.9 | 2.71 | 39.0 | 33.7 | 3.08 | 36.4  | 32.6 | 3.53 | 33.2  | 30.6 | 4.18 |
|       | 80     | 67     | 48.9 | 31.2 | 2.07 | 47.3 | 30.4 | 2.37 | 45.2 | 29.4 | 2.71 | 42.9 | 28.3 | 3.09 | 39.9  | 26.6 | 3.56 | 36.8  | 25.8 | 4.23 |
|       | 80     | 72     | 53.1 | 25.8 | 2.04 | 51.3 | 25.1 | 2.34 | 49.3 | 24.2 | 2.68 | 46.9 | 23.3 | 3.06 | 44.3  | 22.2 | 3.54 | 40.8  | 20.8 | 4.25 |
|       | 75     | 62     | 44.4 | 30.9 | 2.09 | 42.8 | 30.0 | 2.39 | 41.1 | 29.6 | 2.71 | 38.8 | 28.5 | 3.08 | 36.2  | 26.5 | 3.54 | 33.1  | 25.8 | 4.17 |
|       | 75     | 67     | 48.7 | 26.1 | 2.07 | 47.1 | 25.3 | 2.37 | 45.1 | 24.4 | 2.70 | 42.7 | 23.4 | 3.09 | 40.1  | 22.2 | 3.56 | 36.3  | 20.6 | 4.28 |





### GENERAL TERMS OF LIMITED WARRANTY

Nordyne, LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nordyne, LLC warranty department for a copy.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (06/2024)