



TECHNICAL SPECIFICATIONS

Model PPA2RD Series



M1200 Product Line

**Single Packaged Air Conditioner
13 SEER - 2 - 5 Ton Units, R-410A**

- **M1200 – 12 YEAR ALL PARTS LIMITED WARRANTY**
- **M1200 WITH UPGRADED WARRANTY PACKAGE - 12 YEAR ALL PARTS & LABOR LIMITED WARRANTY**
- Both the standard and upgraded limited warranty packages offer a 12 Year Dependability Promise to replace the entire unit, if the unit's major component (heat exchanger or compressor) fails within the first 12 years of operation, to the original owner.
- Product registration (by consumer or dealer) required for 12-year Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytaghvac.com or ask your sales representative.
- Dealer is responsible for registration of labor portion of warranty.




The PPA2RD Series single packaged air conditioners are high efficiency self contained cooling and heating units that can be installed on a slab. Units are ETL and ETLc listed.

Features and Benefits

- **Quality Compressor:** State of the art scroll compressor is standard equipment.
- **Compressor sound blanket:** Is standard.
- **R-410A Refrigerant:** Earth friendly non-ozone depleting refrigerant.
- **Hi/Low Pressure Switches:** Ensure long compressor life.
- **Copper Tube / Aluminum Fin Coils:** Both indoor and outdoor coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Condenser Motor:** A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Low voltage Transformer:** Includes 3 Amp fuse to protect low voltage circuit.
- **Liquid Line Filter Driers:** Factory installed at a convenient location for service.
- **Designed using Galvanized Steel:** With a polyester urethane coat finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.
- **Compact Footprint and Profile:** Make these units easy to install and transport.
- **0" Clearance:** To combustibles on duct side of the unit allows for installations in tight areas.
- **Wire guard coated with Earth Friendly Epoxy and plastic mesh hail guard:** A guard that will never rust and protects the units coil from being damaged.
- **Raised Base Pan:** Allows water to drain away from the unit.
- **Easy Compressor and Control Access:** Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit. Hi/low service ports allow access without disrupting operation.
- **Easy access:** To the evaporator coil for cleaning and general maintenance.
- **Drain Trap:** Design optimizes drainage capabilities.
- **Removable Top Grille Assembly:** Allows ease of service to the fan motor.
- **Duct Collars:** Reduce installation costs.
- **Optional Electric Heat:** Field installed 5 – 20 KW.


DIMENSIONS

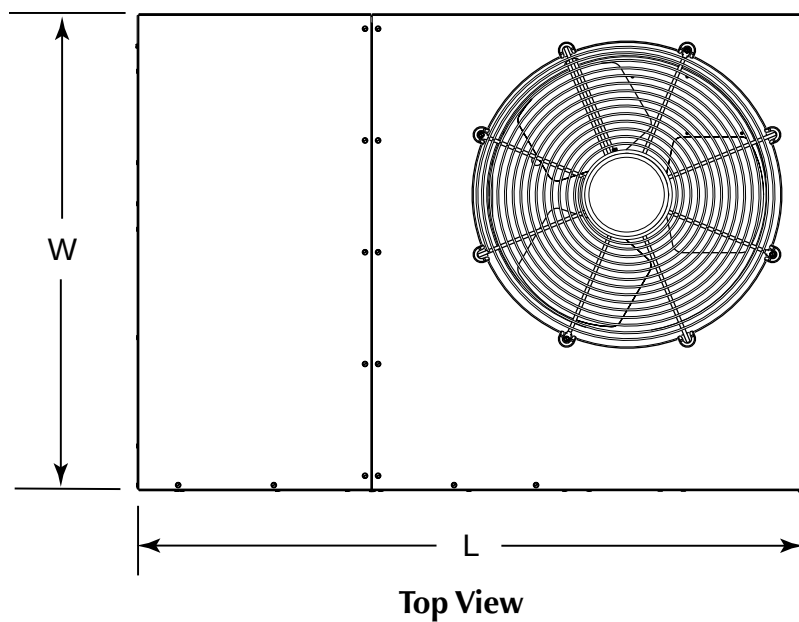


Model No. PPA2RD	(L) Length	(W) Width	(H) Height	A	B
024K	49	35	30.2	35.02	2.48
030K	49	35	30.2	35.02	2.48
036K	49	35	30.2	35.02	2.48
042K	49	35	30.2	35.02	2.48
048K	49	35	30.2	35.02	2.48
060K	49	35	34.2	35.02	2.48

Model Number PPA2RD	Return Diameter (in)	Supply Diameter (in)
024K	14	12
030K	14	12
036K	14	12
042K	14	12
060K	14	12

DIMENSIONS continued

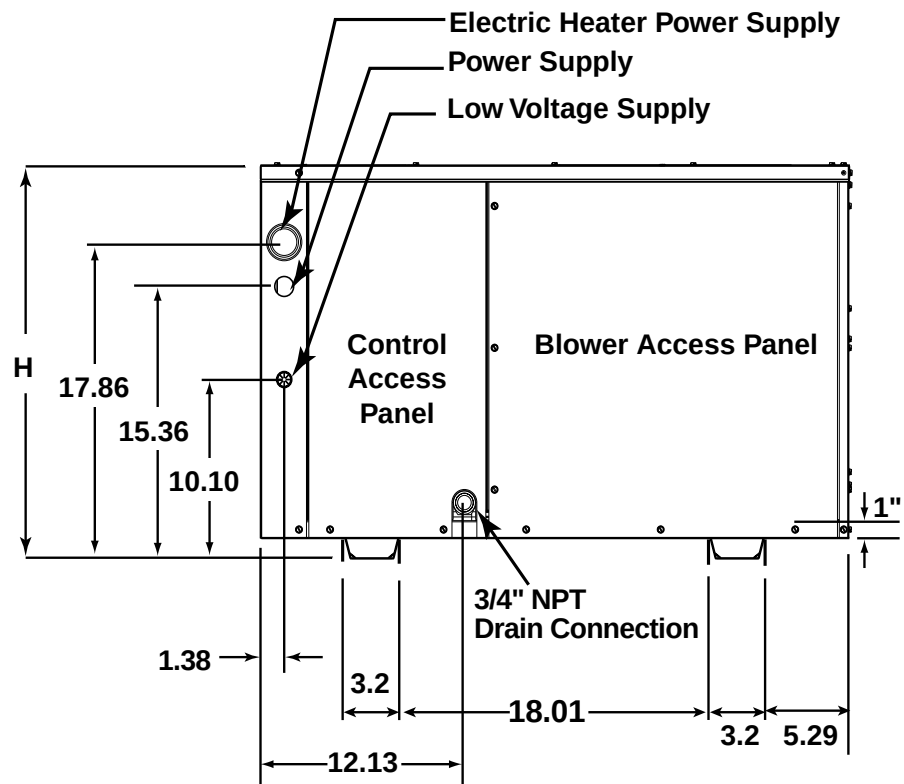

Side View

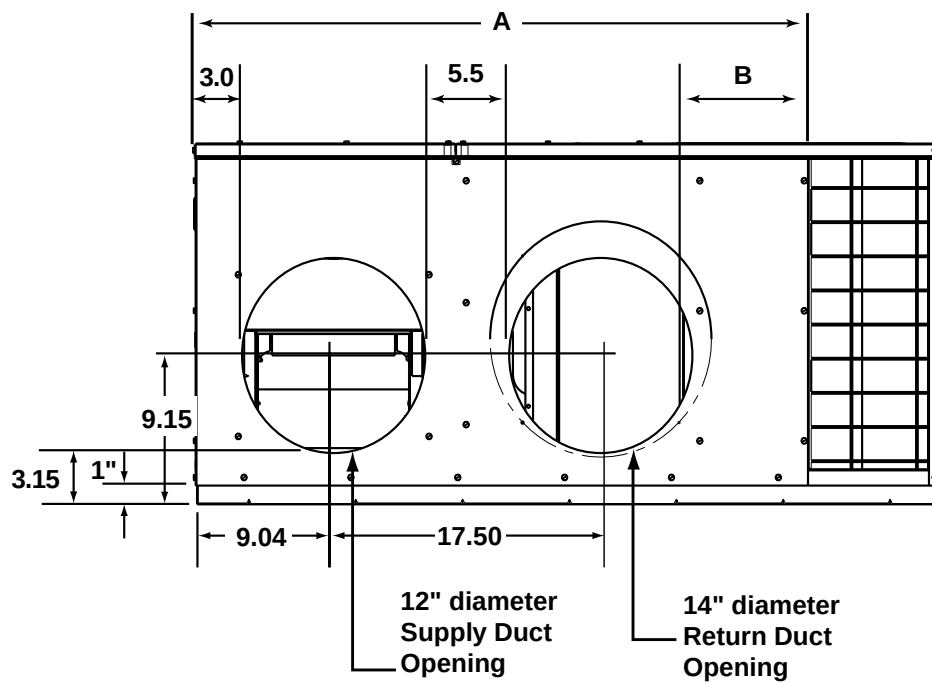

Back (Duct) View

ELECTRICAL DATA

Model	Heater kw	Single Circuit with PSC Blower			Multiple Supply Circuit Option					
					Circuit A, Compressor and Fan			Circuit B, PSC Blower and Heater		
		MCA	Wire Gage*	MOP	MCA	Wire Gage*	MOP	MCA	Wire Gage*	MOP
PPA2RD024K	0	19	12	30	-	-	-	-	-	-
	5	27	10	30	-	-	-	-	-	-
	8	41	8	45	-	-	-	-	-	-
	10	52	8	60	-	-	-	-	-	-
PPA2RD030K	0	22	10	35	-	-	-	-	-	-
	5	27	10	35	-	-	-	-	-	-
	8	41	8	45	-	-	-	-	-	-
	10	52	8	60	-	-	-	-	-	-
	15	77	4	80	50	8	60	27	10	30
PPA2RD036K	0	27	10	45	-	-	-	-	-	-
	5	28	10	45	-	-	-	-	-	-
	8	42	8	45	-	-	-	-	-	-
	10	53	8	60	-	-	-	-	-	-
	15	78	4	80	50	8	60	28	10	30
Model	Heater kw	Single Circuit with ECM Blower			Multiple Supply Circuit Option					
					Circuit A, Compressor, ECM Blower, & Fan			Circuit B, Heater		
		MCA	Wire Gage*	MOP	MCA	Wire Gage*	MOP	MCA	Wire Gage*	MOP
PPA2RD042K	0	33	8	50	-	-	-	-	-	-
	5	33	8	50	-	-	-	-	-	-
	8	41	8	50	-	-	-	-	-	-
	10	52	8	60	-	-	-	-	-	-
	15	77	4	80	52	8	60	25	10	30
	20	102	3	110	52	8	60	50	8	60
PPA2RD048K	0	38	8	60	-	-	-	-	-	-
	5	38	8	60	-	-	-	-	-	-
	8	41	8	60	-	-	-	-	-	-
	10	52	8	60	-	-	-	-	-	-
	15	77	4	80	52	8	60	25	10	30
	20	102	3	110	52	8	60	50	8	60
PPA2RD060K	0	44	8	70	-	-	-	-	-	-
	5	44	8	70	-	-	-	-	-	-
	8	44	8	70	-	-	-	-	-	-
	10	52	8	70	-	-	-	-	-	-
	15	77	4	80	52	8	70	25	10	30
	20	102	3	110	52	8	70	50	8	60

* Copper Wire Gage at 90° Celsius

MCA, Minimum Circuit Ampacity

MOP, Maximum Over-current Protection

NOTE: If electric heat is installed, and the overcurrent rating exceeds 60A, internal circuit breakers must be installed in addition to branch circuit protection at the distribution panel.

HEATER APPLICATION MATRIX

Heater Application Matrix


Model Number PPA2RD-	H3HK-005H-01B 917166B	H3HK-008H-01B 917167B	H3HK-010H-01B 917168B	H3HK-015H-01B 917169B	H3HK-020H-01B 917170B	H3HK-015H-21B 917172B	H3HK-020H-21B 917173B
024K	X	X	X	NA	NA	NA	NA
030K	X	X	X	X(2)	NA	X	NA
036K	X	X	X	X(2)	NA	X	NA
042K	X	X	X	X(2)	X(2)	X	X
048K	X	X	X	X(2)	X(2)	X	X
060K	X	X	X	X(2)	X(2)	X	X

NA = Not Approved.

() = Number of internal circuit breaker kits required.

X = Branch circuit protection only.


IDENTIFICATION CODE

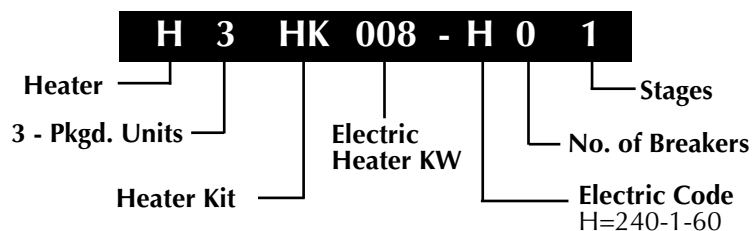

ACCESSORIES

Description	Part Number
4-Pole single circuit adaptor	913350
6-Pole single circuit adaptor	913556
Circuit Breaker Single Phase (2-pole)	913554
Extreme High Wind Kit - Ground Mount	903694

IDENTIFICATION CODE

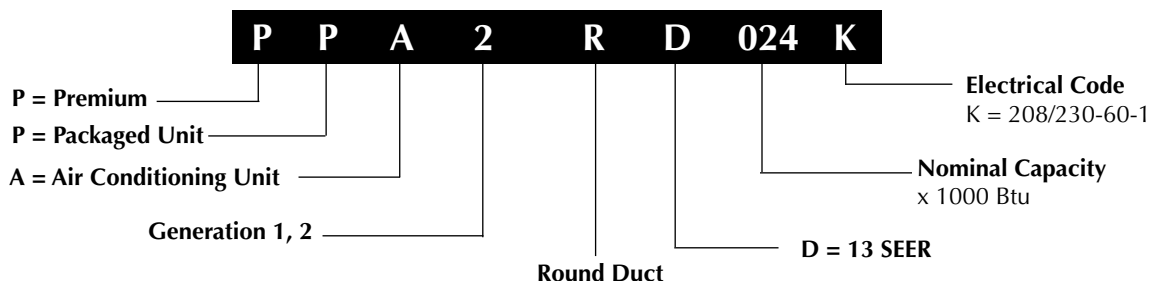

PHYSICAL SPECIFICATIONS

Model No. PPA2RD	024K	030K	036K	042K	048K	060K
Electric Rating - 60Hz (a)						
Operating Voltage Range	187 - 253	187 - 253	187 - 253	187 - 253	187 - 253	187 - 253
Min. Circuit Ampacity (a)	18.5	22.1	26.5	32.9	37.6	44.0
Field Wire Size - AWG (a)	12	10	10	8	8	6
Delay Fuse - Max. (b)	30	35	45	50	60	70
Total Unit - Amps FLA	15.3	18.2	21.8	27.4	31.5	36.6
Compressor Data						
Volts	208 - 230	208 - 230	208 - 230	208 - 230	208 - 230	208 - 230
Rated Load Amps	12.8	15.7	18.6	22.1	24.3	29.4
Lock Rotor Amps	58.3	73.0	79.0	109.0	117.0	134.0
Fan Motor and Condenser						
Fan Motor - HP - RPM	1/8 - 1100	1/8 - 1100	1/8 - 1100	1/8 - 1100	1/4 - 1100	1/4 - 1100
Fan Motor - Amps	1.1	1.1	1.1	1.2	1.2	1.2
Fan Diameter / CFM	20" - 2800	20" - 2800	20" - 2800	20" - 3000	20" - 3000	20" - 3000
Motor and Evaporator						
Blower Motor - HP - RPM	1/4 - 980	1/4 - 980	1/3 - 900	1/2 - 1000	3/4 - 1060	3/4 - 1060
Blower Motor - Amps	1.4	1.4	2.1	4.1	6	6
CFM @ E.S.P. - in. W.C.	770 @ .30	1064 @ .30	1246 @ .30	1300 @ .30	1500 @ .30	1650 @ .30
Refrigerant Charge - Oz.	125	128	157	126.4	155.2	148.8
Shipping weight - lbs.	290	295	295	312	318	348

(a) Amperage and wire size based on refrigeration system only. See Electrical Data tables for supplemental electric heaters.

Refer to National Electric Code for additional derating factors for field installed conductors.

(b) Use time delay fuse or "HACR" type circuit breaker.

SYSTEM COOLING CAPACITIES

Model Number PPA2RD-	Cooling Btuh	SEER	EER
024K	24,000	13	12.4
030K	30,000	13	12.0
036K	35,600	13	11.4
042K	41,000	13	11.5
048K	47,500	13	11.3
060K	55,000	13	10.8

BLOWER PERFORMANCE

Model Number PPA2RD		External Static Pressure (in. WC)					
		0.1	0.2	0.3	0.4	0.5	0.6
024K * **	Low	847	808	770	726	664	562
	High	1104	1114	1064	1010	935	846
030K †	Low	847	808	770	726	664	562
	High	1104	1114	1064	1010	935	846
036K †	Low	1323	1285	1246	1196	1146	1087
	High	1559	1525	1486	1430	1381	1315
042K * **	Tap T1	1100	900	750	650	580	520
	Tap T2	1170	1080	1000	620	900	860
	Tap T3	1220	1180	1140	1100	1070	1020
	Tap T4	1370	1333	1300	1260	1230	1180
	Tap T5	1410	1340	1450	1320	1280	1240
048K * **	Tap T1	1380	1360	1340	1300	1260	1240
	Tap T2	1530	1480	1450	1420	1390	1350
	Tap T3	1570	1540	1500	1475	1440	1405
	Tap T4	1740	1700	1650	1630	1600	1560
	Tap T5	2130	2080	1970	1890	1850	1800
060K * **	Tap T1	1380	1360	1340	1300	1260	1240
	Tap T2	1530	1480	1450	1420	1390	1350
	Tap T3	1570	1540	1500	1475	1440	1405
	Tap T4	1740	1700	1650	1630	1600	1560
	Tap T5	2130	2080	1970	1890	1850	1800

NOTE: Airflow performance is with a dry coil

* Denotes factory set cooling speed

** Denotes factory set electric heating speed

† Factory set cooling and electric heating speed

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit Ampacity
200	150	100	50	
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

COOLING EXPANDED RATINGS

PPA2RD024K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
650	80	62	25.2	19.3	1.47	24.3	19.2	1.63	23.4	19.3	1.80	22.3	18.9	1.99	21.1	19.9	2.21	19.7	18.6	2.45
	80	67	27.5	15.9	1.49	26.5	15.8	1.65	25.5	16.0	1.82	24.3	15.7	2.01	23.0	15.4	2.22	21.5	14.3	2.46
	80	72	30.1	12.4	1.51	29.1	12.4	1.67	27.9	12.6	1.85	26.6	12.4	2.04	25.2	12.2	2.25	23.5	12.5	2.49
	75	63	25.6	15.6	1.48	24.7	15.5	1.64	23.7	15.6	1.81	22.5	15.3	2.00	21.3	14.0	2.21	19.9	15.0	2.45
800	80	62	26.4	21.8	1.48	25.5	22.2	1.64	24.5	21.7	1.81	23.3	21.4	2.00	22.1	21.2	2.22	20.8	20.6	2.46
	80	67	28.6	17.7	1.50	27.6	18.2	1.66	26.5	17.8	1.83	25.2	17.6	2.03	23.8	17.6	2.23	22.2	17.5	2.47
	80	72	31.1	13.6	1.53	30.0	14.2	1.69	28.7	13.8	1.86	27.3	13.7	2.05	25.8	13.8	2.26	24.1	13.8	2.50
	75	63	26.7	17.3	1.48	25.7	17.7	1.64	24.6	17.3	1.81	23.4	17.1	2.01	22.1	17.0	2.22	20.6	16.9	2.46
950	80	62	27.4	24.2	1.49	26.5	24.3	1.65	25.4	23.7	1.82	24.4	23.1	2.01	23.2	22.4	2.23	21.8	21.8	2.46
	80	67	29.5	19.7	1.51	28.4	20.0	1.67	27.2	19.5	1.84	25.9	19.5	2.03	24.5	19.3	2.24	22.8	19.3	2.48
	80	72	31.8	15.0	1.54	30.6	15.3	1.70	29.4	14.9	1.87	28.0	14.9	2.07	26.4	14.9	2.28	24.7	15.0	2.51
	75	63	27.5	19.2	1.49	26.5	19.4	1.65	25.3	18.9	1.82	24.1	18.8	2.01	22.7	18.6	2.22	21.2	18.6	2.46

PPA2RD030K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
900	80	62	31.3	25.2	1.88	30.1	25.0	2.06	28.9	25.2	2.26	27.5	24.7	2.48	26.0	25.6	2.73	24.4	24.0	3.03
	80	67	33.9	20.6	1.90	32.7	20.5	2.08	31.3	20.7	2.28	29.8	20.3	2.50	28.1	20.0	2.75	26.3	18.8	3.04
	80	72	37.1	15.8	1.92	35.8	15.8	2.10	34.2	16.1	2.30	32.5	15.8	2.53	30.7	15.6	2.77	28.5	15.9	3.06
	75	63	31.6	20.1	1.88	30.4	19.9	2.07	29.1	20.1	2.26	27.7	19.7	2.49	26.2	18.0	2.74	24.4	19.4	3.03
1050	80	62	32.3	27.6	1.89	31.1	28.1	2.07	29.9	27.4	2.27	28.5	26.9	2.49	27.1	26.2	2.74	25.6	25.4	3.03
	80	67	38.1	31.9	1.93	36.6	32.4	2.11	35.0	31.6	2.31	33.2	31.2	2.53	31.4	30.3	2.78	29.4	29.2	3.07
	80	72	38.0	17.0	1.93	36.5	17.8	2.11	34.7	17.3	2.31	33.0	17.1	2.53	31.2	17.2	2.78	29.1	17.2	3.06
	75	63	32.6	21.8	1.89	31.3	22.3	2.07	29.9	21.8	2.27	28.4	21.5	2.49	26.8	21.4	2.74	25.0	21.3	3.03
1200	80	62	33.3	29.9	1.89	32.1	29.9	2.07	30.9	28.8	2.27	29.6	28.1	2.50	28.1	27.2	2.75	26.5	26.4	3.04
	80	67	35.6	24.5	1.91	34.3	24.8	2.09	32.8	24.3	2.29	31.1	24.2	2.51	29.4	24.0	2.76	27.4	24.0	3.05
	80	72	38.5	18.5	1.93	37.0	18.9	2.11	35.4	18.4	2.32	33.7	18.4	2.54	31.7	18.3	2.79	29.6	18.4	3.07
	75	63	33.3	23.7	1.89	32.0	24.0	2.08	30.5	23.4	2.28	29.0	23.3	2.50	27.3	23.0	2.75	25.5	23.0	3.04

PPA2RD036K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	37.5	29.5	2.31	36.1	29.3	2.54	34.6	29.4	2.79	32.9	28.8	3.08	31.1	30.1	3.42	29.1	28.1	3.80
	80	67	40.5	24.1	2.34	39.1	24.0	2.57	37.4	24.2	2.83	35.6	23.6	3.12	33.6	23.1	3.45	31.4	21.6	3.84
	80	72	44.2	18.8	2.38	42.6	18.7	2.62	40.6	19.1	2.88	38.3	18.7	3.16	36.1	18.3	3.49	33.7	18.6	3.88
	75	63	37.7	23.7	2.32	36.4	23.4	2.54	34.8	23.5	2.80	33.1	23.0	3.09	31.2	21.0	3.42	29.1	22.6	3.80
1200	80	62	38.5	31.8	2.33	37.1	32.4	2.55	35.5	31.6	2.81	33.8	31.2	3.10	32.0	30.7	3.43	30.1	29.8	3.81
	80	67	41.6	25.7	2.35	40.0	26.4	2.58	38.3	25.8	2.84	36.4	25.5	3.13	34.4	25.4	3.46	32.1	25.2	3.85
	80	72	44.6	19.9	2.39	42.9	20.8	2.63	41.1	20.2	2.89	39.1	19.9	3.18	36.9	19.9	3.50	34.4	19.9	3.89
	75	63	38.7	25.2	2.33	37.3	25.8	2.55	35.7	25.1	2.81	33.9	24.8	3.10	31.9	24.6	3.43	29.7	24.4	3.81
1350	80	62	39.4	34.3	2.33	38.0	34.5	2.56	36.5	33.5	2.82	34.7	33.0	3.11	33.0	31.9	3.44	31.1	30.9	3.83
	80	67	42.4	27.7	2.36	40.8	28.1	2.60	39.0	27.4	2.85	37.1	27.3	3.14	35.0	27.0	3.47	32.6	26.9	3.86
	80	72	45.3	21.4	2.40	43.6	21.8	2.63	41.7	21.2	2.90	39.7	21.1	3.19	37.4	20.9	3.52	34.9	21.0	3.90
	75	63	39.5	27.1	2.34	38.0	27.4	2.56	36.3	26.7	2.82	34.5	26.5	3.11	32.5	26.1	3.44	30.2	26.0	3.82

COOLING EXPANDED RATINGS (Continued)

PPA2RD042K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1150	80	62	44.1	33.2	2.63	42.4	32.9	2.92	40.5	33.0	3.26	38.3	32.2	3.64	36.1	33.8	4.06	33.7	31.5	4.51
	80	67	47.8	27.7	2.66	45.9	27.4	2.94	43.8	27.6	3.28	41.5	27.0	3.67	39.0	26.4	4.09	36.4	24.5	4.54
	80	72	52.8	21.6	2.68	50.6	21.5	2.98	48.2	21.8	3.31	45.5	21.3	3.70	42.6	20.9	4.11	39.1	21.2	4.57
	75	63	44.6	27.0	2.64	42.9	26.8	2.93	40.9	26.9	3.26	38.7	26.2	3.64	36.4	23.8	4.06	33.9	25.6	4.52
1300	80	62	45.3	35.5	2.65	43.5	36.1	2.93	41.5	35.2	3.27	39.3	34.6	3.65	37.0	34.3	4.07	34.5	33.7	4.52
	80	67	49.0	29.4	2.66	47.1	30.2	2.95	44.9	29.3	3.29	42.5	28.9	3.67	39.9	28.7	4.09	37.1	28.5	4.55
	80	72	53.8	22.7	2.69	51.5	23.8	2.97	48.8	23.0	3.32	45.7	22.7	3.70	42.9	22.6	4.12	39.9	22.5	4.58
	75	63	45.8	28.7	2.65	43.9	29.4	2.93	41.9	28.5	3.27	39.6	28.0	3.65	37.2	27.8	4.07	34.6	27.4	4.53
1450	80	62	46.3	38.1	2.65	44.5	38.2	2.93	42.4	37.2	3.27	40.2	36.8	3.65	37.8	35.9	4.08	35.4	35.2	4.53
	80	67	50.1	31.6	2.67	48.0	31.9	2.96	45.7	31.0	3.30	43.2	30.7	3.68	40.6	30.4	4.10	37.8	30.0	4.56
	80	72	54.4	24.4	2.69	51.7	24.9	2.98	49.2	24.0	3.32	46.4	23.9	3.70	43.6	23.5	4.12	40.5	23.6	4.59
	75	63	46.7	30.7	2.65	44.8	30.9	2.94	42.7	30.0	3.28	40.4	29.7	3.66	37.9	29.3	4.08	35.2	28.8	4.53

PPA2RD048K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1350	80	62	50.0	38.7	3.0	48.1	38.4	3.4	46.0	38.5	3.76	43.7	37.7	4.18	41.1	39.4	4.67	38.4	36.7	5.22
	80	67	53.9	31.7	3.1	51.9	31.5	3.4	49.6	31.7	3.79	47.0	31.0	4.22	44.2	30.3	4.70	41.1	28.3	5.25
	80	72	58.6	24.9	3.1	56.0	24.8	3.4	53.1	25.1	3.82	50.3	24.5	4.25	47.4	23.9	4.74	44.0	24.2	5.30
	75	63	50.3	31.1	3.1	48.4	30.8	3.4	46.3	30.9	3.76	43.8	30.1	4.19	41.2	27.3	4.67	38.3	29.4	5.22
1500	80	62	51.1	41.1	3.1	49.2	41.9	3.4	47.0	40.8	3.77	44.6	40.2	4.19	42.1	39.7	4.68	39.2	38.9	5.23
	80	67	55.0	33.4	3.1	52.9	34.3	3.4	50.5	33.4	3.80	47.8	32.9	4.23	45.0	32.7	4.71	41.8	32.4	5.26
	80	72	59.0	26.0	3.1	56.6	27.1	3.4	54.0	26.2	3.83	51.1	25.8	4.26	48.0	25.7	4.75	44.6	25.5	5.31
	75	63	51.4	32.7	3.1	49.4	33.5	3.4	47.1	32.5	3.77	44.7	32.0	4.20	41.9	31.7	4.68	38.9	31.3	5.23
1650	80	62	52.2	43.9	3.1	50.2	44.1	3.4	48.0	43.0	3.77	45.5	42.4	4.20	42.9	41.4	4.69	40.2	40.1	5.24
	80	67	55.9	35.6	3.1	53.7	36.0	3.4	51.3	35.0	3.80	48.6	34.8	4.23	45.6	34.3	4.72	42.3	34.2	5.27
	80	72	59.8	27.6	3.1	57.4	28.1	3.4	54.8	27.2	3.84	51.8	27.0	4.27	48.6	26.7	4.75	45.1	26.7	5.31
	75	63	52.3	34.8	3.1	50.2	35.1	3.4	47.9	34.1	3.78	45.3	33.7	4.21	42.6	33.2	4.69	39.5	32.9	5.23

PPA2RD060K

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1450	80	62	57.8	43.7	3.66	55.5	43.3	4.05	53.0	43.4	4.50	50.2	42.5	5.01	47.1	44.7	5.60	43.6	41.4	6.28
	80	67	62.5	36.0	3.72	60.1	35.7	4.11	57.3	36.0	4.56	54.2	35.1	5.07	50.8	34.3	5.66	46.9	31.9	6.34
	80	72	68.3	28.2	3.79	65.6	28.0	4.18	62.4	28.5	4.64	59.0	27.7	5.15	55.1	27.1	5.73	50.5	27.4	6.40
	75	63	58.4	35.3	3.67	56.1	35.0	4.06	53.5	35.1	4.51	50.7	34.2	5.02	47.4	30.8	5.61	43.8	33.3	6.29
1600	80	62	59.1	46.2	3.68	56.7	47.1	4.06	54.1	45.9	4.51	51.2	45.2	5.02	48.1	44.7	5.61	44.5	43.8	6.29
	80	67	64.2	38.4	3.74	61.5	39.5	4.13	58.6	38.4	4.58	55.5	37.8	5.09	51.9	37.6	5.68	47.8	37.2	6.36
	80	72	69.4	29.3	3.80	66.4	30.7	4.20	63.2	29.7	4.65	59.5	29.3	5.16	55.5	29.2	5.74	51.2	28.9	6.42
	75	63	59.6	37.0	3.69	57.2	38.0	4.07	54.5	36.8	4.52	51.5	36.2	5.03	48.2	35.9	5.62	44.5	35.3	6.30
1750	80	62	60.2	49.3	3.69	57.8	49.5	4.08	55.1	48.3	4.53	52.2	47.8	5.04	49.0	46.8	5.63	45.5	45.3	6.32
	80	67	65.5	41.4	3.75	62.7	41.9	4.14	59.8	40.8	4.60	56.4	40.5	5.10	52.8	39.9	5.69	48.6	39.7	6.37
	80	72	70.2	31.2	3.81	67.1	31.9	4.21	63.7	30.8	4.66	60.1	30.7	5.17	56.2	30.3	5.75	51.8	30.2	6.43
	75	63	60.6	39.3	3.70	58.2	39.7	4.09	55.4	38.5	4.53	52.3	38.1	5.04	48.9	37.5	5.64	45.1	37.1	6.31



MAYTAG®

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ®Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2010. All rights reserved.

919C-0610 (Replaces 919C-0210)

Printed in U.S.A. (06/10)